



EDWARDS AQUIFER
AUTHORITY

HYDROLOGIC DATA REPORT FOR 2014

Report No. 15-01

November 2015



EDWARDS AQUIFER AUTHORITY HYDROLOGIC DATA REPORT FOR 2014

Compiled by:

Robin L. Tremallo, P.G., Technical Data Coordinator

Steve Johnson, P.G., Hydrogeology Manager

J. Mark Hamilton, P.G., Executive Director, Aquifer Management Services

Jim Winterle, P.G., Director, Modeling and Data Management

Sarah Eason, G.I.S.P., GIS Analyst

Javier C. Hernandez, Water Resources Manager

November 2015

900 E. Quincy
San Antonio, Texas 78215

<http://www.edwardsaquifer.org>

CONTENTS

SUMMARY	1
INTRODUCTION	3
HYDROGEOLOGY OF THE EDWARDS AQUIFER	5
GROUNDWATER LEVELS	6
PRECIPITATION	14
Precipitation in the Edwards Aquifer Region	14
Precipitation Enhancement Program (PEP)	21
GROUNDWATER RECHARGE	22
GROUNDWATER DISCHARGE AND USAGE	28
WATER QUALITY	39
Routine Water Quality Data from Edwards Aquifer Wells	51
Routine Water Quality Data from Streams and Springs in the Edwards Aquifer Area	55
Freshwater/Saline-Water Interface Studies	57
SIGNIFICANT EVENTS AFFECTING THE EDWARDS AQUIFER IN CALENDAR YEAR 2014	60
DEFINITIONS	65
ACKNOWLEDGMENTS	69
REFERENCES	69

APPENDICES

A—Year 2014 Water Level Data for Selected Wells	
Table A-1. City of Uvalde Index Well J-27 (YP-69-50-302) daily high water levels	70
Table A-2. City of Hondo Well (TD-69-47-306) daily high water levels	70
Table A-3. City of Castroville Well (TD-68-41-301) daily high water levels	71
Table A-4. Bexar County Index Well J-17 (AY-68-37-203) daily high water levels	71
Table A-5. Landa Park Well (DX-68-23-302) daily high water levels	72
Table A-6. Knispel Well (LR-67-01-809) daily high water levels	72
B—Year 2014 Hydrographs for Wells and Springs	
Figure B-1. Bexar County Index Well J-17 (AY-68-37-203) hydrograph of groundwater elevation vs. precipitation at San Antonio International Airport	73
Figure B-2. City of Hondo Well (TD-69-47-306) hydrograph of groundwater elevation vs. precipitation at Hondo	74
Figure B-3. City of Uvalde Index Well J-27 (YP-69-50-302) hydrograph of groundwater elevation vs. precipitation at Uvalde	75
Figure B-4. Comal springflow hydrograph of springflow vs. precipitation at New Braunfels	76
Figure B-5. San Marcos springflow hydrograph of springflow vs. precipitation at San Marcos	77
C—Year 2014 Water Quality Data (available at www.edwardsaquifer.org)	78
D—Conversion Factors	79

Figures

1. Balcones Fault Zone Edwards Aquifer and other physiographic features in the region	4
2. Year 2014 Edwards Aquifer Authority water-level observation network—Kinney, Uvalde, and Medina counties; Bexar County; and Comal and Hays counties	7
3. Comparison of historical daily mean water level for the period of record 1934–2014 and / the daily high water level at the Bexar County Index Well, J-17 (AY-68-37-203) and Uvalde County Index Well, J-27 (YP-69-50-302).....	12
4. Locations of precipitation gauging stations used by the Edwards Aquifer Authority and other agencies to monitor precipitation in 2014	15
5. Annual precipitation and mean precipitation for San Antonio, 1934–2014	16
6. Ground-calibrated NEXRAD radar rainfall distribution for 2014	20
7. Major drainage basins and Edwards Aquifer Authority-operated recharge structures in the San Antonio segment of the Balcones Fault Zone Edwards Aquifer	23
8. Estimated annual recharge and ten-year floating median estimated recharge for the San Antonio segment of the Balcones Fault Zone Edwards Aquifer 1934–2014	26
9. Major springs in the Southern Segment of the Balcones Fault Zone Edwards Aquifer	29
10. Annual versus period-of-record mean springflow, San Marcos and Comal springs	32
11. Groundwater pumping compared with springflow from the Edwards Aquifer, 1934–2014	33
12. Distribution of total discharge from the Edwards Aquifer by springs and wells for calendar year 2014.....	34
13. Year 2014 Edwards Aquifer Authority water quality sampling locations—wells, springs and streams sampled in Kinney, Uvalde, Medina, Bexar, Comal, and Hays counties	46
14. Regional mean rainfall deficits, 2003–2014	60
15. U.S. drought conditions for Texas, September 2011	61
16. U.S. drought conditions for Texas, December 2014	62
17. Annual recharge in acre-feet, 2003–2014	63
18. Daily Highs for J-17 and J-27, annual recharge and mean rainfall deficits	63
19. Comparison of water levels at Index Well J-17 for periods 1945–1957 and 2003–2014	64
20. Trend in monthly pumping for years 1947–2011.....	64

Tables

1. Highest and lowest recorded water levels for selected observation wells in the San Antonio segment of the Edwards Aquifer, 1934–2014	10
2. Annual precipitation for selected rain gauges in the Edwards Aquifer region, 1934–2014.....	17
3. Monthly precipitation data from selected National Oceanic and Atmospheric Administration precipitation gauging stations and deviation from mean rainfall values, 2014	18
4. 2014 monthly precipitation totals for real-time network rain gauges.....	18
5. Estimated annual groundwater recharge to the Edwards Aquifer by drainage basin, 1934–2014	24
6. Estimated annual Edwards Aquifer recharge from Edwards Aquifer Authority-operated recharge structures...	27
7. Annual estimated groundwater discharge data by county for the Edwards Aquifer, 1934–2014.....	30
8. Estimated spring discharge from the Edwards Aquifer, 2014	31
9. Comprehensive discharge summary for calendar year 2014	34
10. Annual estimated Edwards Aquifer groundwater discharge by use, 1955–2014	35
11. Groundwater withdrawals attributed to permit holders and type of use within the Edwards Aquifer Authority jurisdictional area, 1999–2014.....	36
12. Groundwater discharge attributed to permit holders by type of use, domestic use, and springflow within the Edwards Aquifer Authority jurisdictional area by county, 1999–2014	37
13. Comparison of drinking-water quality standards with range of concentrations from water quality results, 2014	41
14. Secondary drinking-water standards	51
15. Bacteria results in well samples, 2014.....	51
16. Elevated nitrate-N concentrations in well samples, 2014	52
17. Volatile organic compound results in well samples, 2014.....	53
18. Semivolatile organic compound results in well samples, 2014	54
19. Pesticide and herbicide results in well samples, 2014	54
20. Pharmaceuticals and personal care product results in well samples, 2014.....	54
21. Metal results in streams and springs, 2014.....	55
22. Semivolatile organic compound and PCB results in streams and springs, 2014.....	56
23. Herbicide and pesticide results in streams and springs, 2014	57
24. Pharmaceutical and personal care product results in streams and springs, 2014.....	58
25. Classification of groundwater quality on the basis of total dissolved solids	59

SUMMARY

This report presents results of the Edwards Aquifer Authority's (EAA's) Edwards Aquifer Data Collection Program for calendar year 2013. The report also provides a summary of events that were considered significant and that may have affected the Edwards Aquifer during the year. During 2014, the EAA collected a wide variety of Edwards Aquifer related data, including

- Groundwater level data;
- Precipitation measurement data;
- Groundwater recharge data;
- Groundwater discharge and usage data; and
- Water quality data from groundwater, surface water, and springs.

Groundwater Level Data (p. 6–13)

Water levels at the Bexar County (J-17) Index Well were below the historical mean for the entire year. The maximum level of 644.3 feet above mean sea level (msl) at J-17 occurred during February, and the low of 625.9 feet above msl occurred in September. Uvalde County (J-27) Index Well also remained below its historical mean for the entire year, with a maximum level of 836.6 feet msl in early January and a steady decline to a minimum of 824.2 feet on the last day of the year. Other wells in the region exhibited similar behavior with regard to lower than normal water levels. The Comal County Observation Well (DX-68-23-302) had an annual high water level below the historical mean high. For most of the year, this well also exhibited lower than normal water levels.

Precipitation Measurement Data (p. 14–21)

In 2014, rainfall amounts were below the mean across the Edwards Aquifer region. In general, the region received between 63 and 93 percent of normal precipitation during the year, with the lowest rainfall totals occurring in southern Medina County and western Uvalde County.

Groundwater Recharge Data (p. 22–27)

Total estimated recharge to the Edwards Aquifer was below normal in 2014. Recharge for the year was estimated at 107,200 acre-feet, which is well below the

median annual recharge of 556,100 acre-feet for the period of record (1934–2014). Recharge in 2014 was the second lowest on record, with only 1956 recharge being lower.

Groundwater Discharge and Usage Data (p. 28–38)

In calendar year 2014, total groundwater discharge from the Edwards Aquifer through wells and springs was estimated at 527,549 acre-feet. This amount is below the median total discharge of 687,000 acre-feet for the period of record (1934–2014).

Discharge from wells in 2014 was estimated to be 332,159 acre-feet, approximately 2,759 acre-feet above the 329,400 acre-foot median for the period of record (1934–2014). The lowest annual estimated discharge from wells for the period of record was 101,900 acre-feet in 1934, and the highest was 542,400 acre-feet in 1989.

Discharge from springs in 2014 was estimated at 195,376 acre-feet, significantly lower than the period-of-record median of 379,850 acre-feet. The lowest annual discharge from springs for the period of record (1934–2012) was 69,800 acre-feet in 1956, and the highest was 802,800 acre-feet in 1992. Spring discharge in 2014 was the fifth-lowest discharge on record. The maximum daily average flow rate for Comal Springs in 2014 was 175 cubic feet per second (cfs) in early February; the minimum of 65 cfs occurred in late August. For San Marcos Springs, the maximum daily average flow of 234 cfs occurred in early November, and the minimum of 98 cfs occurred in late May.

Water Quality (p. 39–59)

In 2014, EAA staff collected water quality samples from 61 wells (some wells were sampled multiple times), 14 streams, and four spring groups. Samples for pharmaceutical and personal care products (PPCPs) were collected at three wells, four springs, and four streams. Samples collected for the year are summarized below by sample type and location.

Sample-Collection Summary, Calendar Year 2014

Bacteria Samples

- 74 samples collected at 59 wells
- 70 samples collected at four spring groups
- 24 samples collected at 12 stream sites

Metals Samples

- 72 samples collected at 59 wells
- 71 samples collected at four spring groups
- 21 samples collected at 14 stream sites

Nitrate-Nitrite as Nitrogen

- 87 samples collected at 59 wells
- 71 samples collected at four spring groups
- 21 samples collected at 14 stream sites

Volatile Organic Compounds

- 69 samples collected at 56 wells
- 70 samples collected at four spring groups
- Four samples collected at two streams

Semivolatile Organic Compounds

- 59 samples collected at 48 wells
- 71 samples collected at four spring groups
- 16 samples collected at 14 streams

Pesticide and/or Herbicide Compounds

- 51 samples collected at 43 wells
- 71 samples collected at four spring groups
- 15 samples collected at 12 stream sites

Polychlorinated Bi-Phenyls

- 32 samples collected at 27 wells
- 72 samples collected at four spring groups
- 16 samples collected at nine stream sites

Pharmaceuticals and Personal Care Products

- Three samples collected at three wells
- Four samples collected at four spring groups
- Five samples at four streams

Significant Events Affecting the Edwards Aquifer in Calendar Year 2014 (p. 60–64)

Calendar year 2014 brought no relief from drought conditions that have persisted in the Central Texas region for the past several years. With the exception of years 2004, 2007, and 2010, total annual recharge to the Edwards Aquifer has been significantly below the long-term (1934–2014) average of almost 700,000 acre-feet each year since 2003. The 2014 estimated total annual recharge of 107,200 acre-feet was the second-lowest estimate on record since 1934. On March 28, 2013, the Uvalde pool of the aquifer reached the Stage V critical-period management trigger for the first time since its inception, when the 10-day average water level in Uvalde Index Well J-27 fell below 840 feet msl. The Uvalde pool remained in Stage V for the rest of 2013 and 2014. The San Antonio pool fared marginally better and finished the year with San Antonio Index Well J-17 at 633.8 feet msl, which is well below the Stage III critical-period management trigger of 640 feet msl.

INTRODUCTION

The Balcones Fault Zone Edwards Aquifer in south central Texas is one of the largest and most productive karst aquifer systems in the United States. The physical extent of the aquifer covers an area approximately 180 miles long and five to 40 miles wide. The aquifer is the primary water source for much of this area, including the City of San Antonio and surrounding communities. Historically the cities of Uvalde, San Antonio, New Braunfels, and San Marcos were founded around large springs that discharged from the aquifer. As the region grew and technology improved, wells were drilled into the aquifer to supplement and subsequently replace water provided by the springs. In addition, the Edwards Aquifer is the principal source of water for agriculture and industry in the region and provides springflow required for endangered species habitat, as well as recreational purposes and downstream uses in the Nueces, San Antonio, Guadalupe, and San Marcos river basins.

The Southern Segment of the Balcones Fault Zone Edwards Aquifer (Edwards Aquifer) in south central Texas is one of the most permeable and productive aquifers in the United States. The Edwards Aquifer extends from the groundwater divide east of Brackettville in Kinney County, east to San Antonio in Bexar County, then northeast to the groundwater divide near Kyle in Hays County—a distance of approximately 180 miles (Figure 1). The aquifer, the primary source of water for approximately two million people in the region (<http://quickfacts.census.gov/qfd/>), also provides most of the water for agriculture and industry. In addition, the aquifer discharges through a series of large springs that provide aquatic habitat for a number of threatened and endangered species. Springflow also provides water for downstream interests in the Guadalupe River Basin.


The EAA was created by the Texas Legislature in 1993 to succeed the Edwards Underground Water District

(EUWD) as a special regional water management district for the Edwards Aquifer. The EAA jurisdictional area encompasses all or parts of Uvalde, Medina, Atascosa, Bexar, Comal, Guadalupe, Hays, and Caldwell counties (Figure 1). The EAA is governed by a 17-member board of directors, with voting members elected to represent 15 districts across the EAA region and two non-voting members appointed by other entities. The board is constructed to represent agricultural, industrial, domestic, municipal, spring, and downstream user groups. The Legislature also created the South Central Texas Water Advisory Committee (SCTWAC) to interact with the EAA when issues that could impact downstream water rights are being considered.

The Legislature mandated that the EAA take all necessary measures to effectively manage the resource to ensure domestic and municipal water supplies, to provide water supplies for agriculture and industry, to protect terrestrial and aquatic habitat, and to sustain the economic development of the region. To accomplish these goals, the EAA is vested with all of the “powers, rights, and privileges necessary to manage, conserve, preserve, and protect the aquifer, and to increase the recharge of, and prevent the waste or pollution of water in, the aquifer.” (From the Edwards Aquifer Authority Act, as amended. The Act may be viewed at www.edwardsaquifer.org.)

This report presents results of the EAA’s Edwards Aquifer data collection program for calendar year 2014. The EAA and cooperating agencies collected a wide variety of data regarding the Edwards Aquifer, including aquifer levels, precipitation measurements, recharge estimates, groundwater discharge and use, and water quality samples. In addition, the report contains historical aquifer recharge and discharge data for the period of record (1934–2014). Subsequent sections contain definitions and references.

Figure 1. Balcones Fault Zone Edwards Aquifer and Other Physiographic Features in the Region

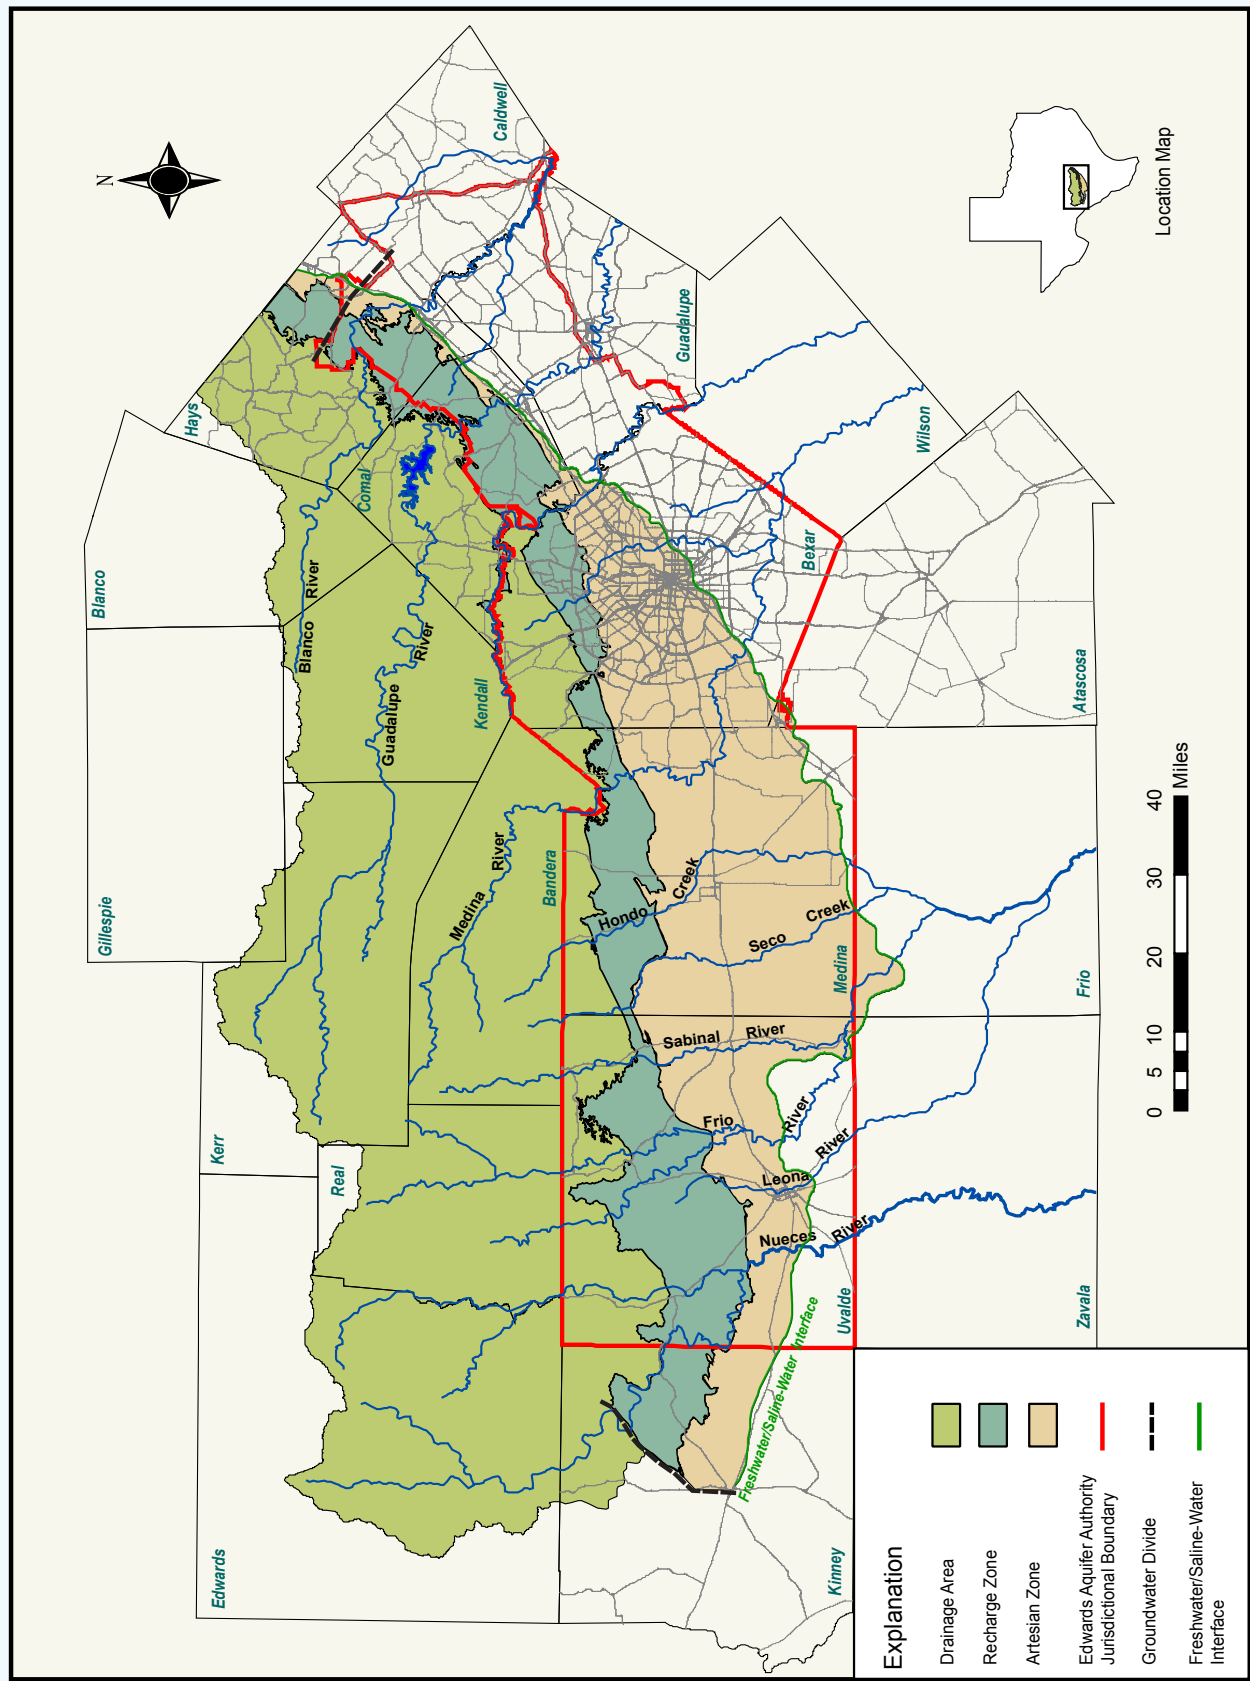

HYDROGEOLOGY OF THE EDWARDS AQUIFER

The Edwards Aquifer is contained within the Cretaceous-age Edwards Group limestone (Edwards Limestone) and associated units. The Edwards Limestone, which is generally capped by the Del Rio Clay, overlies the upper member of the Glen Rose Limestone (upper unit of the Trinity Aquifer). The Edwards Aquifer region has three major components: the contributing zone, the recharge zone, and the artesian zone. The contributing zone covers approximately 5,400 square miles and is composed of the Edwards Limestone on top of the Edwards Plateau and the Glen Rose Limestone on hillsides and valley bottoms. The Edwards Limestone is missing from the southern and eastern flanks of the plateau as a result of erosion along the Balcones Escarpment. Normal faulting, associated with the Balcones Fault Zone, has downfaulted the geologic units in this area. The Texas Hill Country is formed by retreat of the Edwards Plateau by erosional processes. Generally from northwest to southeast across this region, the Edwards Limestone is exposed at higher elevations along much of the plateau. Erosional processes have removed the Edwards Limestone and exposed the older Glen Rose Limestone throughout much of the Texas Hill Country. To the south and east, the Edwards Limestone is again present and exposed at the surface by downward faulting along the Balcones Fault Zone. This surface exposure is the recharge zone of the Edwards Aquifer. Farther south and east, downfaulting has dropped the Edwards Limestone even farther below the surface, confining the aquifer between the Del Rio Clay above and the upper member of the Glen Rose Limestone below. This part of the aquifer is identified as the artesian zone of the Edwards Aquifer. Here the Edwards Aquifer produces freshwater from depths as great as 3,400 feet below the surface. The southern boundary of the artesian zone (Figure 1) marks the aquifer's transition from freshwater to brackish water (water with a total dissolved solids [TDS] concentration greater than 1,000 mg/L).

Water circulates through the freshwater parts of the Edwards Aquifer as part of the hydrologic cycle from recharge areas to discharge points (springs and wells). Approximately 1,220 square miles of Edwards Limestone is exposed at the ground surface and composes the recharge zone, where water enters the aquifer. Streams

flow south or east from the contributing zone, or drainage area (the Texas Hill Country and Edwards Plateau), and lose all or most of their baseflow as they cross the recharge zone. In addition, part of the rain that falls directly on the recharge zone also enters the aquifer. Groundwater moves through the aquifer and ultimately discharges from a number of locations, such as Leona Springs in Uvalde County, San Pedro and San Antonio springs in Bexar County, Hueco and Comal springs in Comal County, and San Marcos Springs in Hays County. In addition, domestic, livestock, municipal, agricultural, and industrial wells withdraw water from the aquifer. The residence time of water in the aquifer ranges from a few hours or days to many years, depending on depth of circulation, location, and other aquifer parameters.

The Edwards Aquifer is a karst aquifer, characterized by the presence of sinkholes, sinking streams, caves, large springs, and a well-integrated subsurface drainage system. Within the artesian zone, it is one of the most productive groundwater systems in the United States, characterized by extremely high capacity water wells and high spring discharges. The aquifer exhibits extremely high (cavernous) porosity and permeability, characteristic of many karst aquifers. In contrast, aquifers that occur in sand and gravel or in other rock types, such as sandstone, have a much lower permeability. Because the Edwards Aquifer has many areas of high permeability, it transmits large volumes of water, and groundwater levels respond quickly to rainfall (recharge) events. In addition, a highly developed aquifer ecology with more than 40 endemic species has been identified from the aquifer.

Historically, water quality in the Edwards Aquifer artesian zone has been protected by its great depth below population centers, and the recharge zone and contributing zone were largely undeveloped. However, there are potential threats to the quality of water in the aquifer from various sources, including the transport, storage, and use of hazardous substances and other chemicals on the recharge zone, abandoned or poorly completed water wells, and urban non-point runoff. The high porosity and permeability of the Edwards Aquifer allow inflow of contaminants from the ground surface with little filtration.

GROUNDWATER LEVELS

The EAA currently maintains a groundwater level monitoring network from eastern Kinney County to central Hays County. Figures 2a–c indicate the location of wells in the EAA's observation network within the Edwards Aquifer region. The water level observation network includes the recharge (unconfined) and artesian (confined) zones of the Edwards Aquifer and wells within the Trinity and Leona Gravel aquifers. Water levels are monitored through periodic manual measurements (tape down) or electronic data loggers and recorded in feet above mean sea level (msl). Many of the wells have at least partial historical records dating back several decades.

In 2014, the EAA's Water Level Data Collection Program consisted of 46 electronic data-logger-equipped observation wells and 19 tape-down wells. EAA staff also measure over 150 additional wells as part of a regional synoptic water level monitoring program each year. Focused synoptic measurements have been collected episodically in Comal and Hays counties since 2006, with the goal of improving understanding of aquifer behavior in this area. Synoptic measurements are generally obtained with steel-tape or electric-line measuring devices. Water level data collected by the EAA are forwarded to interested Federal, State, and regional agencies.

The EAA and its predecessor, the EUWD, have also collected water level data from the Trinity Aquifer in northern Bexar County since 1991 and the Leona Aquifer in southern Uvalde County since 1966. Water level monitoring of the Edwards Aquifer and associated hydrogeologic units adds to the base of scientific knowledge and helps in the management of this regional water resource. Table 1 lists the annual records of high, low, mean, and median water levels measured in five selected Edwards Aquifer observation wells across the region. For the period of record, water levels are typically highest in the spring and lowest in the summer, before rebounding in the fall and winter. During 2014, water levels across the region were below the historical mean and median values. For

calendar year 2014, the Bexar County Index Well J-17 (AY-68-37-203) water level was below the historical mean value the entire year (Figure 3a). The maximum and minimum water levels at J-17 for 2014 were 644.3 and 629.9 feet above msl, respectively. The maximum value occurred in February, whereas the minimum occurred in September. The highest water level on record at J-17 is 703.3 feet above msl in June 1992, and the lowest is 612.5 feet above msl in August 1956. Figure 3b shows the 2014 hydrograph for Uvalde County Index Well J-27 (YP-69-50-302). Since February 2012, J-27 water levels have been imputed from a nearby Edwards Aquifer well to avoid drawdown interference from adjacent water supply wells. The imputed levels are calculated from a regression equation with a high degree of correlation. However, to determine daily high water levels used for regulatory purposes at J-27 (critical-period restrictions), the adjacent wells are turned off for one hour each day, allowing water levels at J-27 to recover to a static level. This shutdown procedure is continued for a period of ten consecutive days so that ten-day averages at J-27 can be determined to implement critical-period (drought) reductions for Uvalde County. Figure 3b depicts historical average water levels (for the period of record), as well as imputed daily high water levels at J-27 for the year. Water levels in Uvalde were below the historical mean for the entire year, with the maximum imputed water level for the year of 837.5 feet above msl occurring January 7 and 8, and the minimum imputed water level of 824.9 feet above msl occurring on December 31. The highest water level on record at J-27 is 889.1 feet above msl, which occurred in June 1987, and the lowest is 811.0 feet above msl, which occurred in April 1957.

Additional water level data are presented in Appendices A and B of this report. Appendix A contains summary tables for selected observation wells, and Appendix B shows well hydrographs and precipitation measurements for wells in Bexar, Medina, and Uvalde counties. Hydrographs for Comal and San Marcos springs are also included in Appendix B.

Figure 2a. Year 2014 Edwards Aquifer Authority Water Level Observation Network—Kinney, Uvalde, and Medina Counties

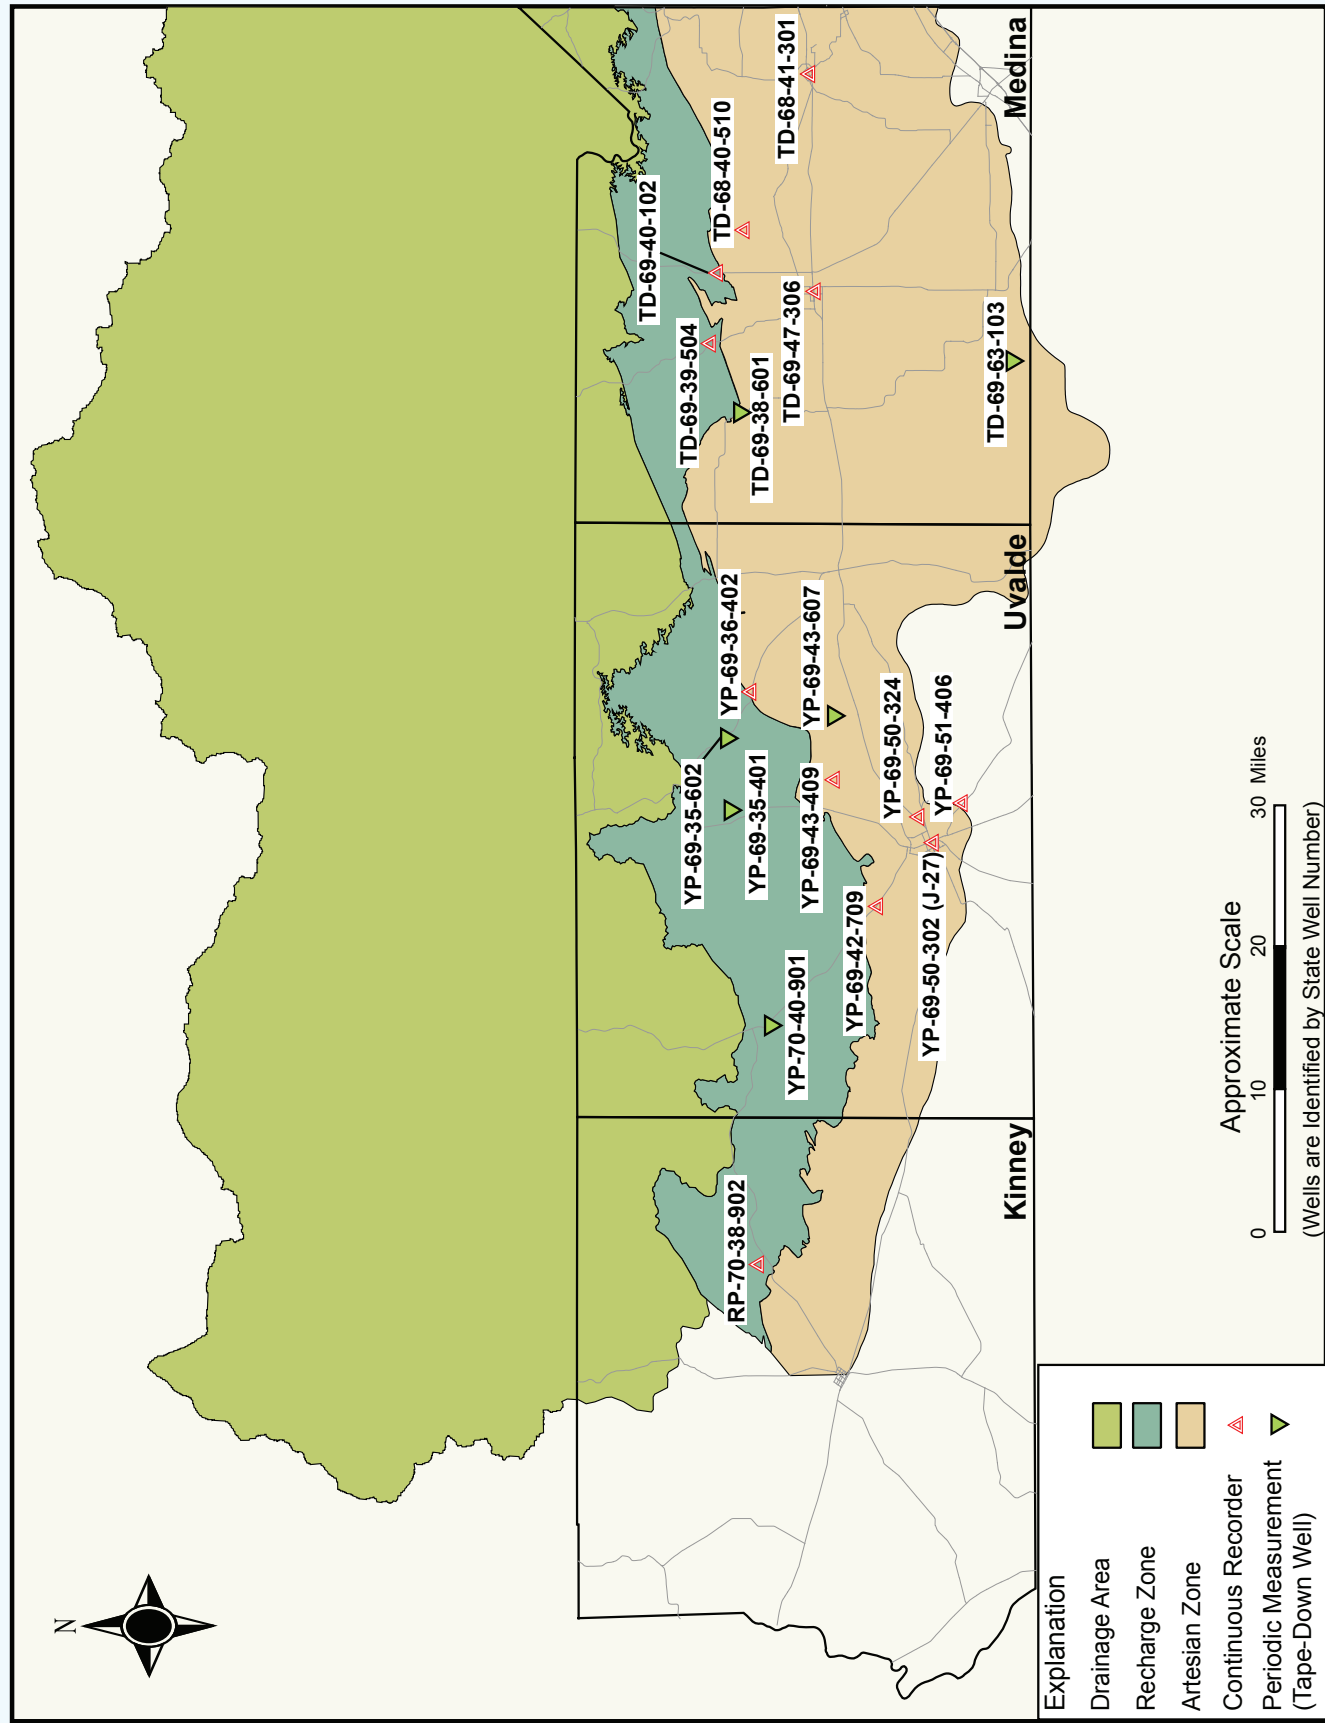


Figure 2b. Year 2014 Edwards Aquifer Authority Water Level Observation Network—
Bexar County

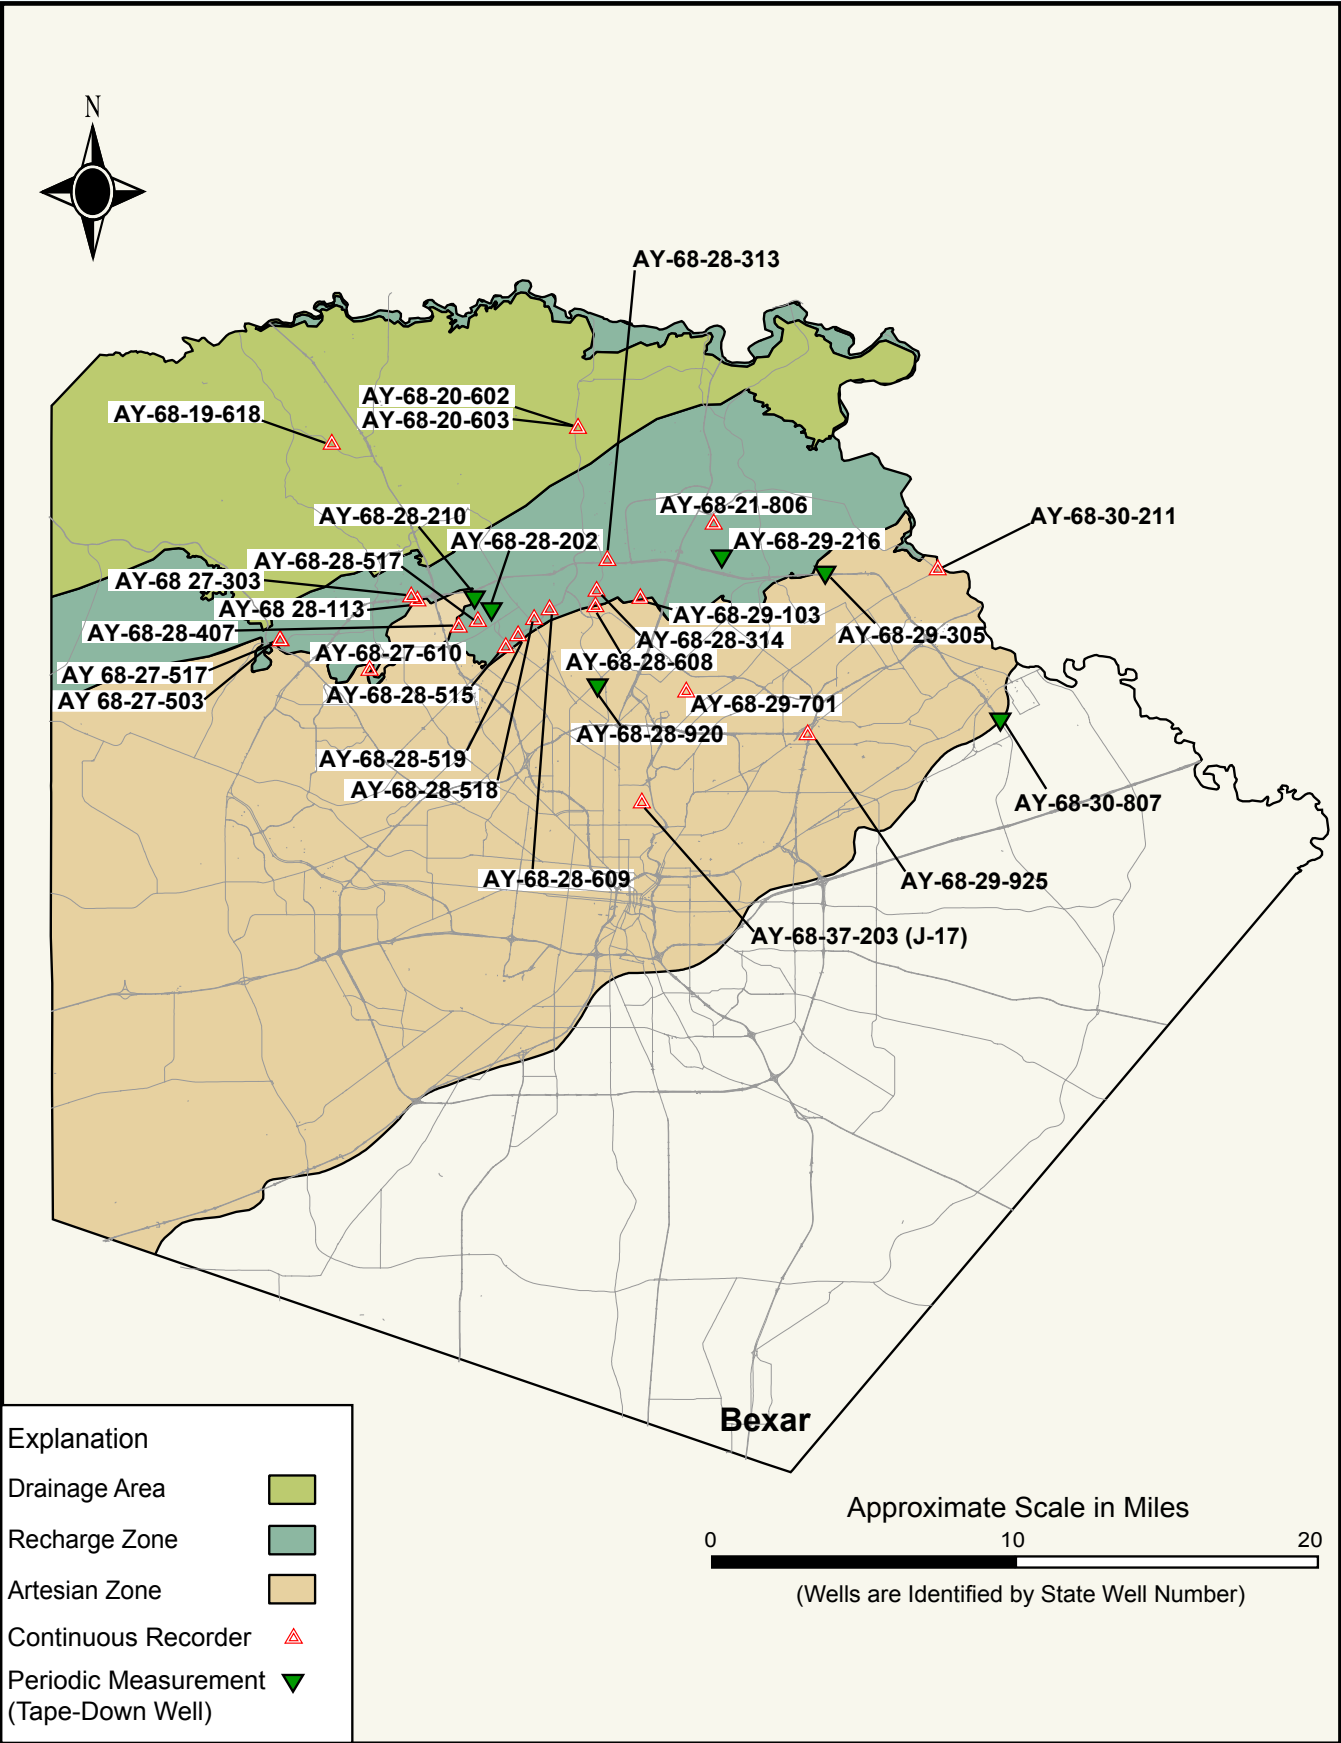


Figure 2c. Year 2014 Edwards Aquifer Authority Water Level Observation Network—
Comal and Hays Counties

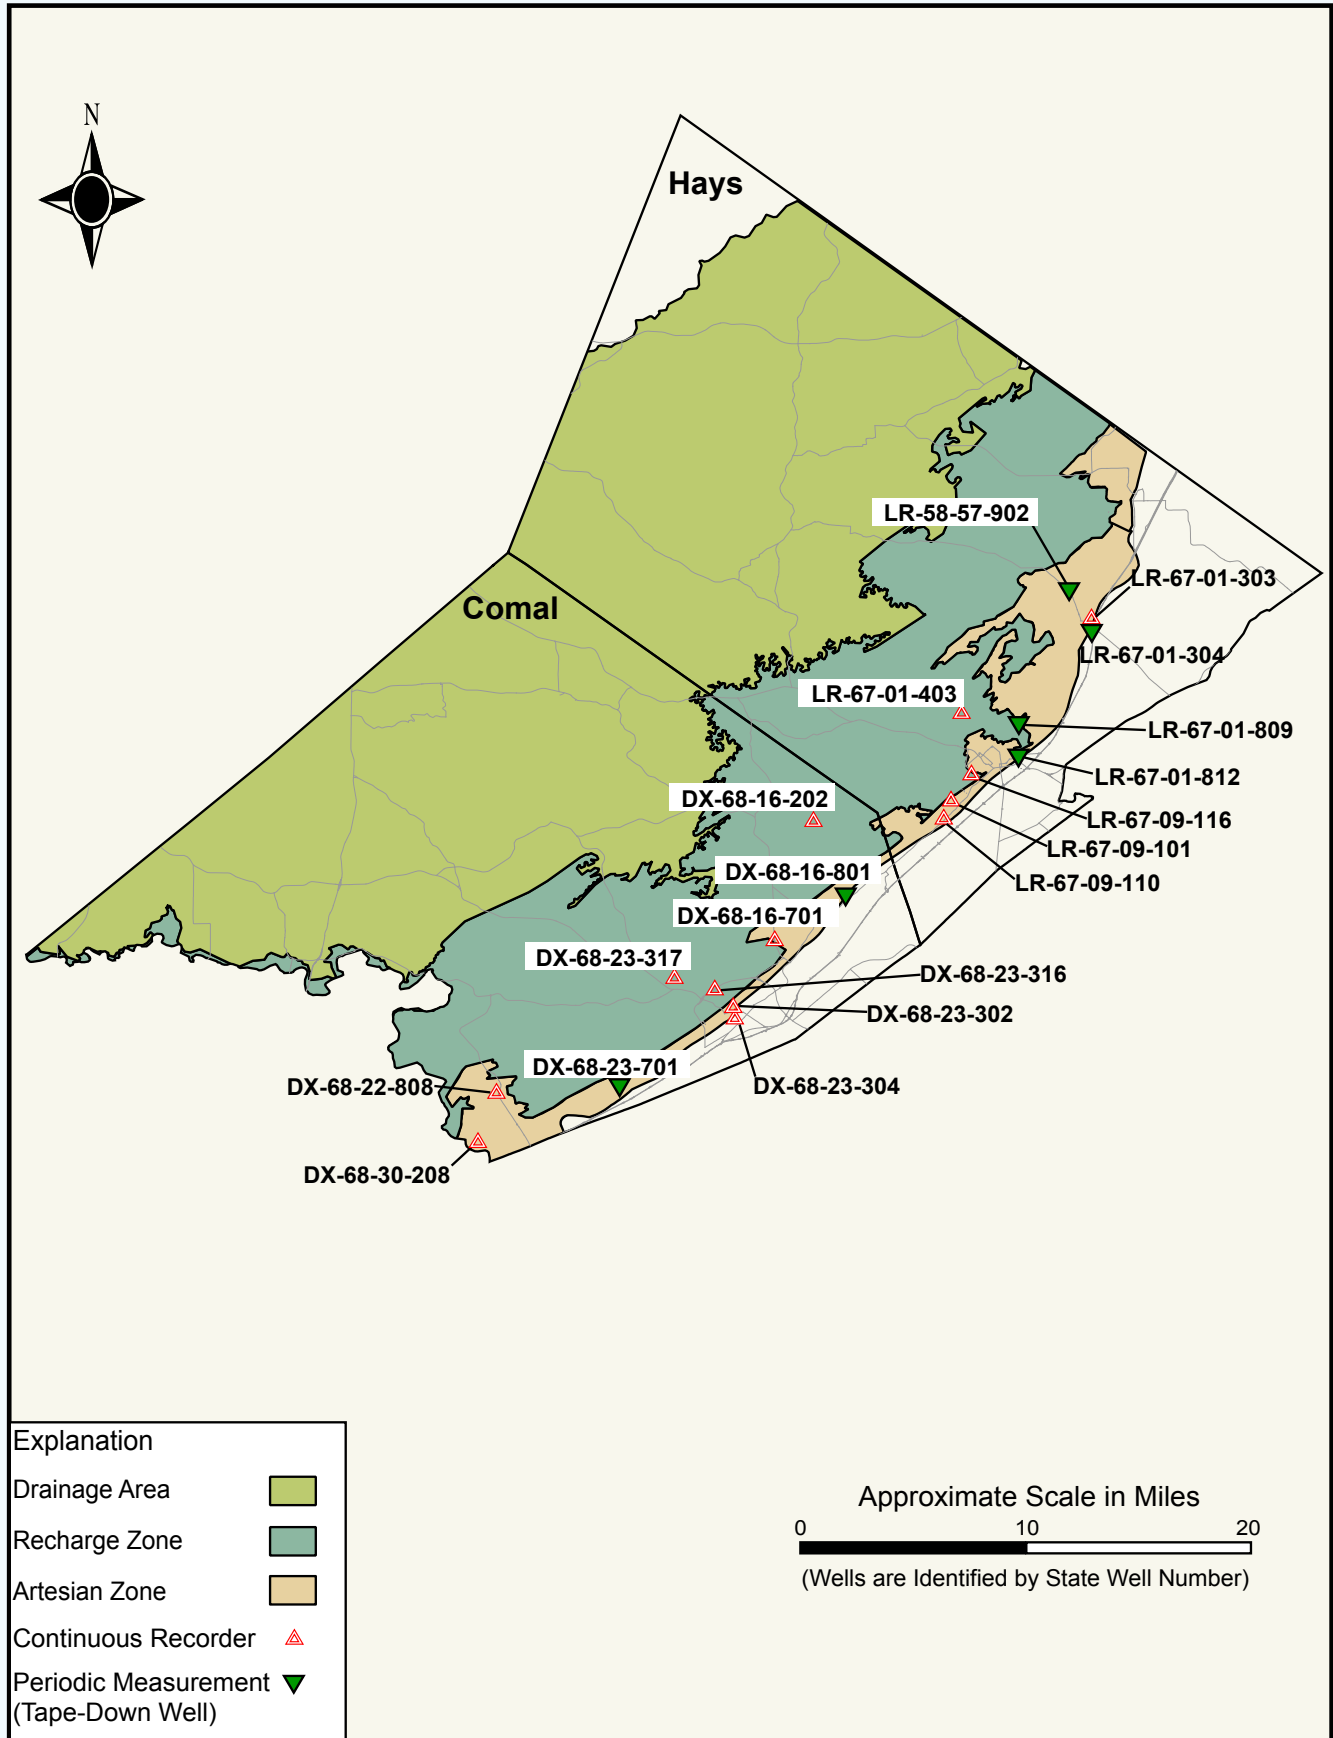


Table 1. Highest and Lowest Recorded Water Levels for Selected Observation Wells in the San Antonio Segment of the Edwards Aquifer, 1934–2014 (measured in feet above msl).

Year	J-27 Uvalde Uvalde County YP-69-50-302 ^a		Castroville Medina County TD-68-41-301 ^b		J-17 San Antonio Bexar County AY-68-37-203 ^c		New Braunfels Comal County DX-68-23-302 ^d		Kyle Hays County LR-67-01-304 ^e	
	High	Low	High	Low	High	Low	High	Low	High	Low
1934	----	----	----	----	675.2	666.8	----	----	----	----
1935	----	----	----	----	681.3	666.8	----	----	----	----
1936	876.6	876.5	----	----	683.0	676.6	----	----	----	----
1937	878.1	877.1	----	----	682.1	674.9	----	----	583.4	581.6
1938	875.8	874.0	----	----	681.4	673.6	----	----	590.6	581.5
1939	873.4	869.6	----	----	674.1	665.7	----	----	580.6	569.6
1940	872.3	868.5	----	----	671.4	661.0	----	----	572.2	568.7
1941	875.7	867.7	----	----	682.5	668.3	----	----	587.7	578.6
1942	875.8	871.9	----	----	685.4	669.7	----	----	580.8	573.7
1943	874.5	868.0	----	----	679.6	668.5	----	----	578.2	574.6
1944	869.3	866.8	----	----	677.6	667.1	----	----	580.5	579.3
1945	870.1	865.2	----	----	681.9	668.8	----	----	----	----
1946	867.1	862.9	----	----	681.2	663.6	----	----	----	----
1947	870.7	867.1	----	----	680.7	665.8	----	----	577.3	577.0
1948	868.4	860.5	----	----	667.7	653.7	624.4	624.3	560.5	559.4
1949	871.2	859.1	----	----	671.6	655.6	626.7	624.1	562.3	561.8
1950	871.2	861.8	687.0	674.9	665.4	653.8	625.2	624.0	575.8	575.2
1951	861.8	846.8	675.2	659.9	656.0	640.6	624.2	622.5	575.3	569.4
1952	846.8	834.9	663.8	649.9	650.5	633.4	623.0	621.5	573.0	569.1
1953	835.2	817.8	665.1	647.7	651.5	630.5	623.6	621.1	584.5	573.2
1954	836.7	823.1	660.3	642.4	646.3	628.9	623.1	620.5	581.8	562.8
1955	834.3	824.1	649.1	635.6	638.5	624.2	621.9	619.8	575.7	558.4
1956	834.2	814.2	641.6	622.3	632.2	612.5	621.0	613.3	569.8	542.2
1957	840.9	811.0	666.1	633.0	653.8	624.4	624.7	620.1	584.9	568.3
1958	866.1	840.8	704.4	665.7	679.6	653.3	626.6	624.6	593.6	580.8
1959	876.1	866.2	703.8	689.0	677.7	661.5	627.1	625.1	591.4	580.5
1960	876.9	873.1	706.3	686.0	679.4	657.9	627.1	624.9	589.4	584.3
1961	878.5	875.6	710.3	693.4	681.2	663.9	627.3	625.7	591.6	573.2
1962	878.3	867.7	703.6	676.3	675.5	646.9	626.3	623.2	584.1	565.0
1963	869.7	860.9	689.1	659.2	665.8	635.0	625.0	621.7	581.6	560.0
1964	860.9	849.0	676.3	654.8	657.1	632.8	624.1	621.6	578.2	562.8
1965	865.8	860.3	689.6	666.8	675.0	645.6	626.6	623.5	590.1	573.4
1966	867.2	860.2	686.1	665.0	668.8	642.7	625.9	623.1	589.0	566.6
1967	867.4	856.4	679.4	645.2	659.7	624.9	624.6	620.0	582.8	556.6
1968	873.3	864.8	702.0	679.2	678.3	655.9	627.2	624.6	593.8	574.4
1969	875.0	866.5	694.8	670.5	676.1	642.8	626.3	623.4	588.7	567.7
1970	876.1	871.3	700.7	678.8	677.1	650.4	627.2	624.3	593.2	575.0
1971	877.7	864.0	701.3	646.4	674.6	627.9	626.2	621.0	577.1	551.3
1972	877.8	874.6	704.6	676.7	679.0	651.2	626.7	624.1	579.7	576.3
1973	881.6	874.5	731.2	690.1	696.5	665.9	629.8	626.1	589.9	572.3
1974	881.4	876.0	723.8	696.0	689.2	660.9	629.1	625.8	593.6	558.5
1975	882.1	879.4	721.0	708.2	686.9	672.0	629.3	626.5	589.8	571.4
1976	884.9	876.0	732.4	694.9	693.1	663.8	629.4	625.8	584.6	571.2
1977	886.2	881.3	737.8	715.3	696.0	675.6	630.2	627.6	587.4	562.1
1978	882.6	875.6	722.4	681.7	684.1	650.1	628.1	624.5	572.0	540.4
1979	882.0	876.1	728.2	710.3	690.5	676.4	629.0	627.3	584.9	572.0
1980	879.1	868.0	716.1	666.8	680.3	640.8	627.5	623.0	572.0	551.8
1981	881.8	867.9	723.2	698.8	686.0	668.6	628.0	625.5	586.2	565.5
1982	881.8	876.4	717.1	682.8	680.5	645.3	627.3	623.6	584.7	544.7
1983	877.1	871.3	698.2	667.7	670.0	642.1	625.6	623.0	588.7	560.4
1984	873.3	856.9	684.5	642.0	657.0	623.3	624.4	619.6	582.5	544.3
1985	876.9	862.2	699.0	670.7	674.5	644.1	626.8	623.3	591.4	561.8
1986	877.8	872.2	704.6	674.2	685.6	649.8	627.7	624.1	595.0	576.3
1987	889.1	877.9	743.5	711.1	699.2	676.9	630.4	627.2	595.9	583.5
1988	887.0	878.0	725.3	679.9	684.9	647.7	627.9	623.9	593.2	585.9
1989	879.0	866.6	695.3	650.5	663.9	626.4	624.9	620.5	571.7	571.5

(Table 1. continued)

	J-27 Uvalde Uvalde County YP-69-50-302 ^a		Castroville Medina County TD-68-41-301 ^b		J-17 San Antonio Bexar County AY-68-37-203 ^c		New Braunfels Comal County DX-68-23-302 ^d		Kyle Hays County LR-67-01-304 ^e	
Year	High	Low	High	Low	High	Low	High	Low	High	Low
1990	872.9	861.6	679.5	640.8	658.1	622.7	624.3	620.3	577.6	561.2
1991	873.8	865.4	703.8	666.1	680.3	640.5	627.0	623.3	593.8	575.1
1992	885.2	872.9	743.6	704.3	703.3	680.7	630.9	627.0	595.4	586.2
1993	884.9	877.3	730.2	706.6	692.8	672.0	629.4	626.9	593.7	575.9
1994	----	----	718.6	684.1	679.2	652.1	627.2	624.7	575.0	545.3
1995	877.2	871.1	703.0	681.8	676.5	651.1	626.8	624.5	575.4	552.4
1996	874.2	859.0	693.0	650.2	664.9	627.5	625.3	621.2	573.2	551.3
1997	882.3	868.2	700.5	672.7	677.9	648.7	626.4	623.6	575.8	559.0
1998	880.6	868.7	717.1	669.1	688.9	640.0	629.6	622.9	575.6	552.4
1999	880.7	876.8	716.4	682.9	686.4	656.9	628.7	624.9	588.6	537.9
2000	878.3	868.0	700.4	662.5	676.7	635.5	626.8	622.2	549.2	544.6
2001	877.2	872.7	713.4	685.9	682.8	652.8	628.3	624.5	563.9	544.6
2002	883.2	876.3	732.7	685.8	697.9	650.0	630.2	624.6	589.3	554.4
2003	883.3	877.9	729.5	696.7	694.8	671.6	629.9	627.5	604.2	537.6
2004	884.9	879.2	740.9	706.3	702.1	677.6	632.6	627.4	609.5	542.6
2005	885.6	880.2	740.4	687.8	699.8	675.4	631.3	627.7	590.2	561.8
2006	879.3	868.6	689.7	675.1	678.1	647.6	627.7	623.8	603.4	513.7
2007	882.7	867.8	740.7	686.8	700.7	661.9	631.2	625.9	592.4	547.3
2008	882.6	873.4	727.3	682.2	689.2	657.3	629.3	625.5	587.6	536.9
2009	873.3	860.1	697.7	661.6	671.2	640.3	626.6	613.5	570.3	553.8
2010	867.0	862.2	708.3	689.5	682.7	667.1	630.4	626.3	*	*
2011	864.3	847.4	701.0	657.1	674.5	639.9	627.3	622.6	*	*
2012	848.1**	840.1**	694.9	664.3	666.8	637.6	628.4	622.5	595.2 ^f	554.4 ^f
2013	841.4**	833.9**	681.2	650.6	658.4	631.5	624.1	621.2	582.5 ^f	550.4 ^f
2014	837.5**	824.9**	660.2	644.2	644.3	625.9	622.8	620.2	584.4 ^f	558.0 ^f
Mean	High	Low	High	Low	High	Low	High	Low	High	Low
Median	872.2	863.2	703.5	673.1	676.6	651.8	627.0	623.5	*	*
Record	876.1	867.9	703.6	674.9	679.0	652.1	627.1	623.9	*	*
Level	High	Low	High	Low	High	Low	High	Low	High	Low
Month	889.1	811.0	743.6	622.3	703.3	612.5	632.6	613.3	609.5	513.7
Year	June 1987	April 1957	June 1992	Aug. 1956	June 1992	Aug. 1956	Nov. 2004	Aug. 1956	Nov. 2004	Sept. 2006

Data source: Edwards Aquifer Authority unpublished data (2014).

^a = Continuous monitoring equipment established on October 24, 1940.

^b = Continuous monitoring equipment established on May 25, 1950.

^c = Continuous monitoring equipment established on January 1, 1963.

^d = Continuous monitoring equipment established on November 4, 1948.

^e = Values based on monthly tape-down measurements (no continuous monitoring equipment installed in this well).

^f = LR-67-01-304 was out of service, replaced by nearby LR-67-01-303.

* = Well damaged; measurements for 2010, 2011, 2012, and 2013 impacted by damage and not reported for year (mean/median shown through 2009).

** = Values based on imputed value of Uvalde County Index well (J-27).

Note: Median and mean values based on data in Table 1 for period of record.

Figure 3a. Comparison of Historical Daily Mean Water Level for the Period of Record 1934–2014 and the Daily High Water Level at the Bexar County Index Well, J-17 (AY-68-37-203)


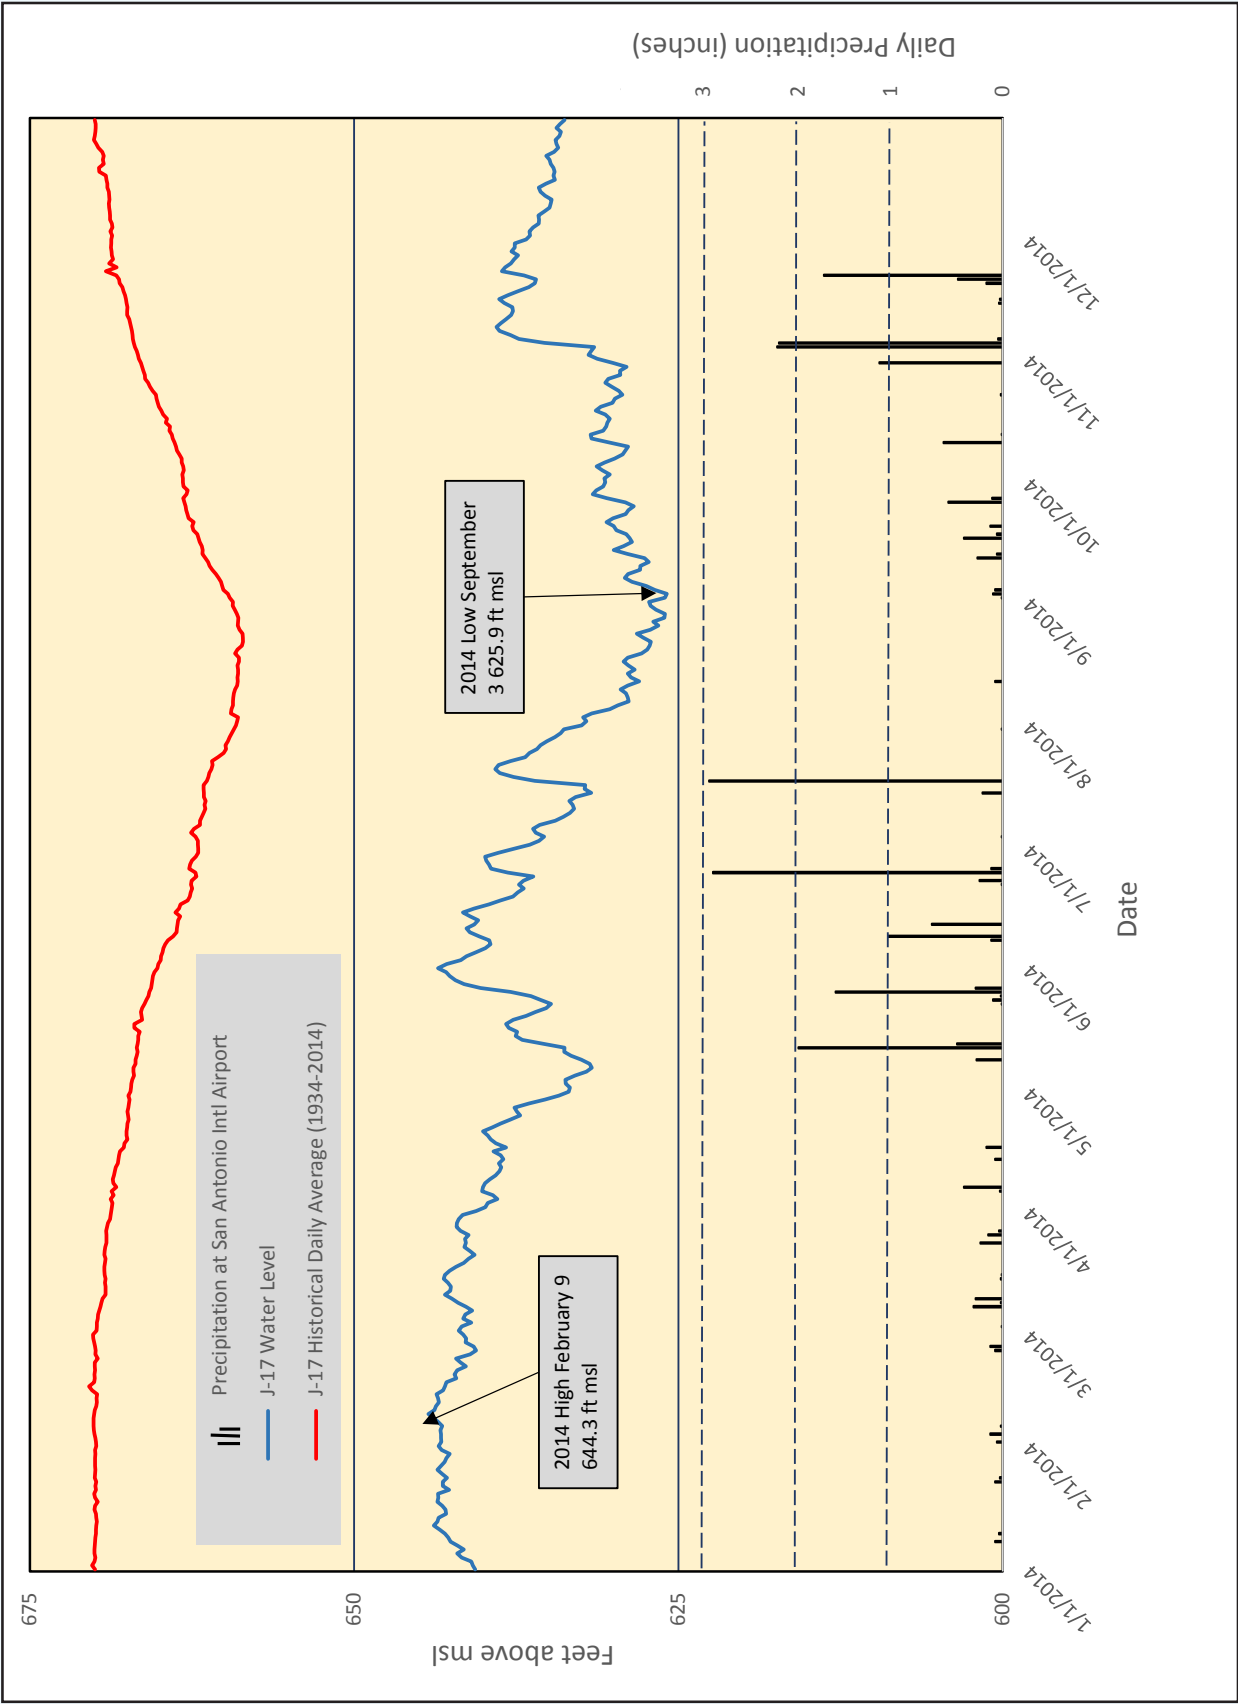


Figure 3b. Comparison of Historical Daily Mean Water Level for the Period of Record 1936–2014 and the Daily High Water Level at the Uvalde County Index Well, J-27 (YP-69-50-302)

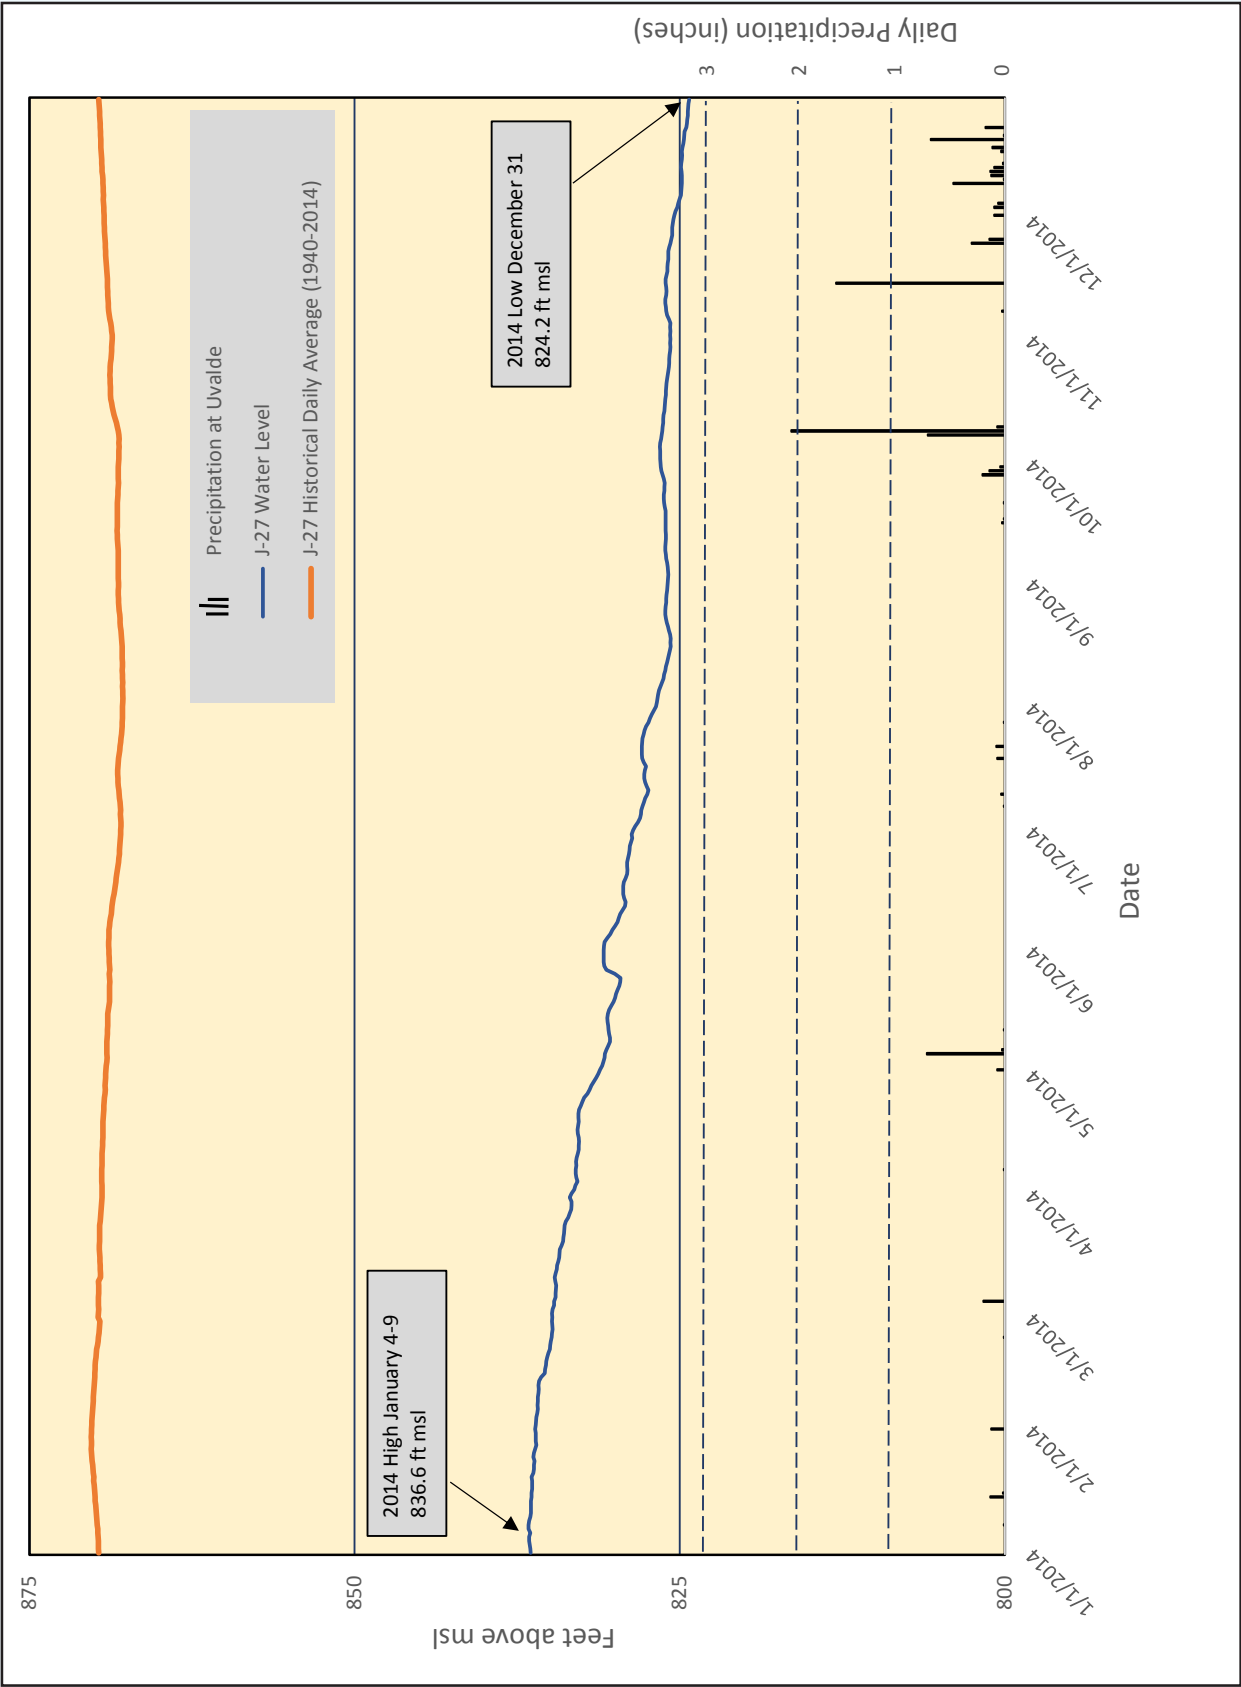

PRECIPITATION

Precipitation in the Edwards Aquifer Region

Precipitation varies significantly across the Edwards Aquifer region. Mean annual precipitation ranges from approximately 22 inches in the western part of the region to just under 34 inches in the eastern part of the region. The mean annual precipitation for San Antonio from 1934 through 2014 is approximately 30.35 inches, although annual precipitation has ranged from 13.70 to 52.28 inches since 1934 (U.S. Department of Commerce, 2014).

Precipitation data are used to calculate recharge to the Edwards Aquifer, monitor any precipitation trends that may affect recharge to the aquifer, and help evaluate the effectiveness of the EAA's Precipitation Enhancement Program. Precipitation data are gathered from EAA's network of rain-gauge stations and National Oceanic and Atmospheric Administration (NOAA) weather stations located throughout the region. Figure 4 shows the locations of precipitation gauging stations used by the EAA to monitor precipitation in 2014.

Annual precipitation data are summarized by city in Table 2. Monthly precipitation data are summarized by NOAA station in Tables 3a and 3b, and additional monthly data for EAA's real-time network rain-gauge station totals are summarized in Table 4. In 2014, EAA's real-time network consisted of 75 operational rain-gauge sites (Figure 4).

Median annual precipitation ranges from 20.32 inches in the west to 33.35 inches in the east. New Braunfels recorded the largest deviation below the median, with only 23.17 inches of rainfall recorded for 2014, compared

with a median of 32.75. San Antonio rainfall was 2.20 inches below the median value of 30.40 inches for the year.

In 2014, total precipitation measured at the San Antonio International Airport was 28.20 inches. Mean precipitation in San Antonio for the period between 1934 and 2014 was 30.35 inches. Annual and mean precipitation data for San Antonio from 1934 through 2014 are shown graphically in Figure 5. Regional rainfall by city (Table 2) for 2014 was below the mean in the entire Edwards Aquifer region. For example, San Marcos recorded only 23.84 inches of rainfall for the year, which is 10.01 inches below the mean rainfall for the period of record, 1934–2014.

Regional rainfalls are summarized graphically in Figure 6. The data in Figure 6 represent annual rainfall totals for the region using NEXRAD radar imagery calibrated with ground-based measurements to develop an annual rainfall distribution for the region. Each grid square in Figure 6 represents a 16-square-kilometer (approximately 6.25 square miles) area. Shades of blue indicate higher relative rainfall amounts, whereas orange and red shades indicate less relative rainfall. The NEXRAD radar data show that regional rainfall was highest in Travis and Hays counties, with most of the higher rainfall totals missing the Edwards Aquifer recharge and contributing zones. Kinney, Uvalde, Real, Edwards and parts of Medina counties generally received the lowest rainfall volumes of the region.

Figure 4. Locations of Precipitation Gauging Stations Used by the EAA and Other Agencies to Monitor Precipitation in 2014

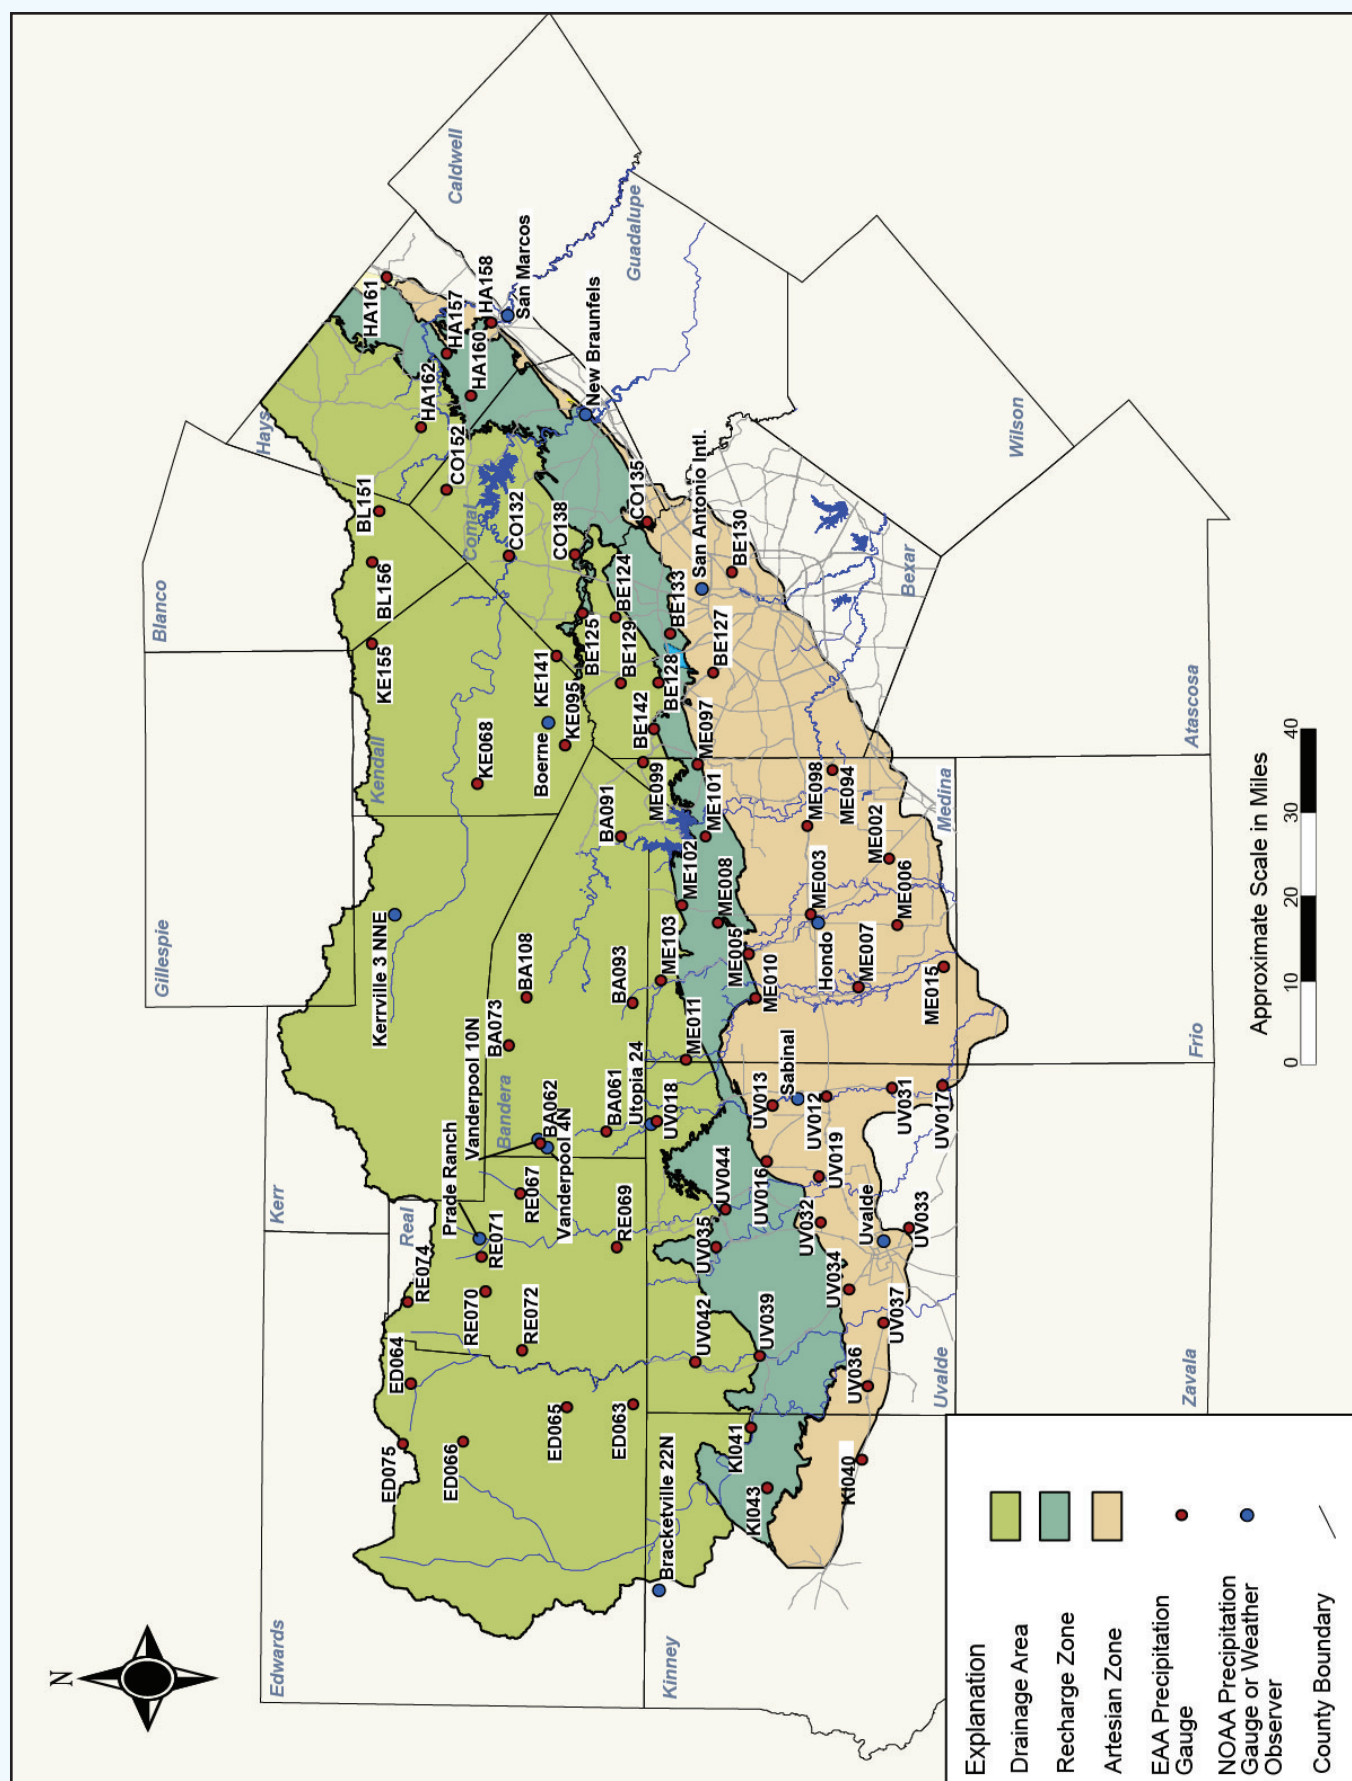


Figure 5. Annual Precipitation and Mean Precipitation for San Antonio, 1934–2014

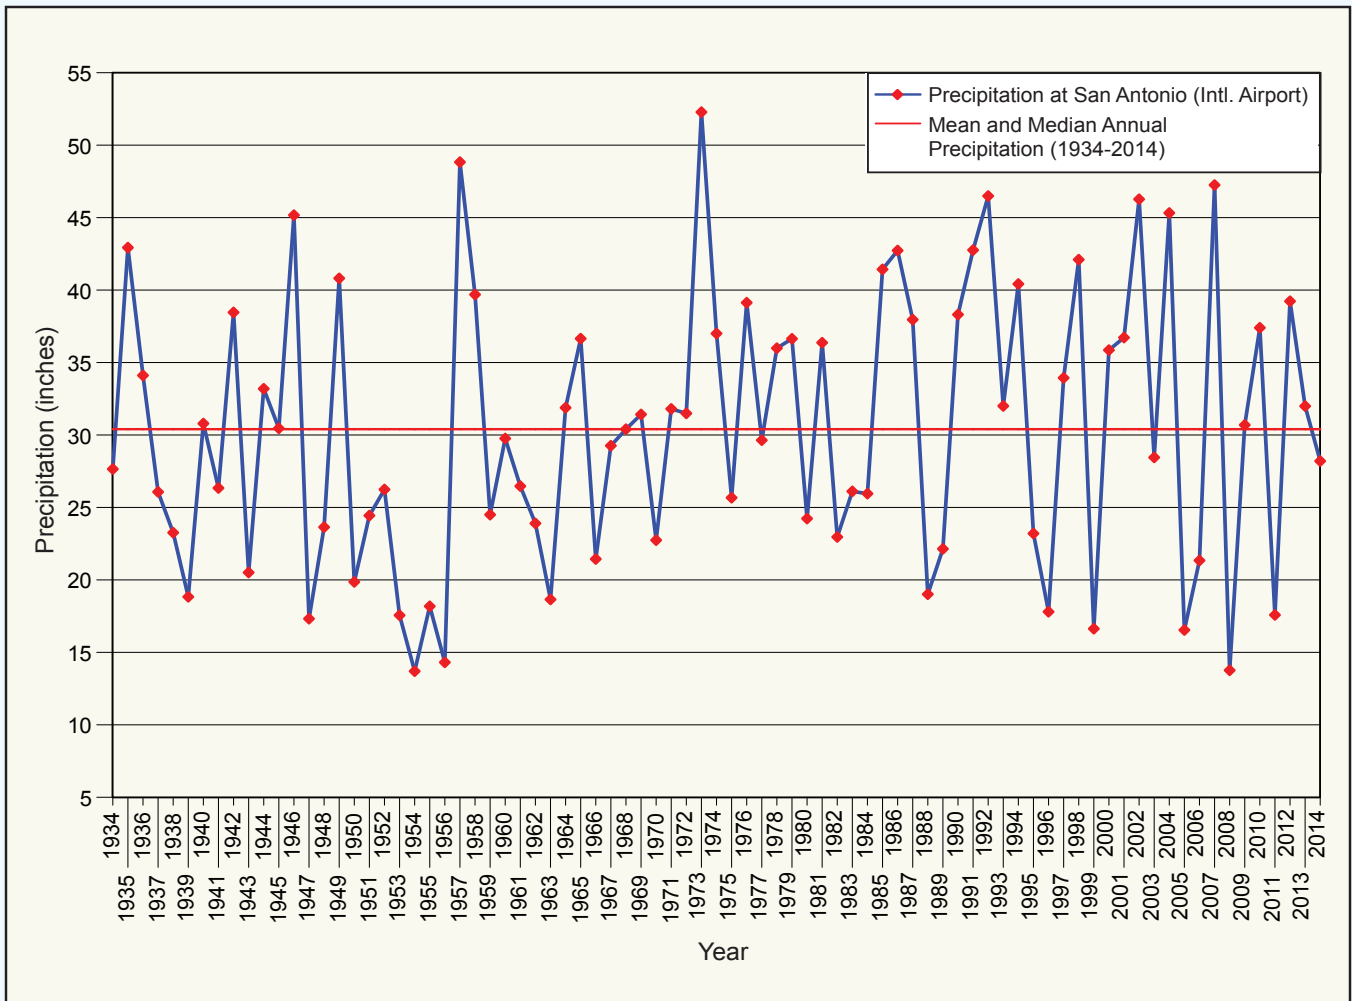


Table 2. Annual Precipitation for Selected Rain Gauges in the Edwards Aquifer Region, 1934–2014 (in inches).

Year	Brackettville	Uvalde	Sabinal	Hondo	San Antonio	Boerne	New Braunfels	San Marcos
1934	---	16.70	18.07	23.97	27.65	26.78	30.80	35.67
1935	---	41.17	48.21	58.73	42.93	52.93	41.67	41.09
1936	22.34	24.53	26.53	35.27	34.11	47.59	30.41	33.48
1937	16.85	17.88	9.57 ^a	22.93	26.07	32.81	29.19	26.03 ^a
1938	19.97	13.12	15.39	27.56	23.26	24.14	28.32	28.17
1939	18.38	25.30	13.98 ^b	23.14	18.83	26.20	13.35	18.59
1940	22.43	27.66	27.51	28.13	30.79	32.29	38.11	43.57
1941	21.52	31.79	33.74 ^a	44.07	26.34	41.60	42.99	48.41
1942	21.01	19.01	11.37 ^a	34.83	38.46	31.12	42.08	44.65
1943	23.39 ^b	20.63	17.21	31.43	20.51	26.33	29.93	25.45
1944	24.76	32.76	27.62 ^a	32.46	33.19	42.98	43.14	47.42
1945	15.69	22.37	26.60	29.57	30.46	33.50	39.38	31.74 ^b
1946	19.10	26.41	14.16 ^a	29.65	45.17	45.62	61.60	52.24
1947	22.92 ^b	22.67	---	18.98	17.32	21.89	27.52	27.53
1948	20.02 ^a	18.31	---	28.82	23.64	23.77	19.88 ^b	21.27 ^a
1949	31.32	34.41	---	39.90	40.81	41.15	43.21	36.22
1950	17.70	18.27	15.28 ^a	24.91	19.86	24.94	21.13	21.10
1951	14.71	16.07	15.63	24.05 ^a	24.44	18.76	24.84	30.88
1952	12.26	18.24	23.16	25.56	26.24	37.54	33.87	39.91
1953	10.12	18.34	21.44	20.61	17.56	21.42	30.06	33.39
1954	19.38	15.60	14.72	11.92	13.70	10.29	10.12	13.42
1955	26.55	18.36	20.87	21.21	18.18	19.27	23.12	26.44
1956	7.58	9.29	11.29	15.54	14.31	12.05	18.41	18.37
1957	34.21	39.30	40.03	35.09	48.83	52.55	51.88	46.51
1958	45.37	39.03	41.18	41.60	39.69	40.94	36.40	39.08
1959	27.51	31.51	27.02	30.68	24.50	35.64	40.45	43.47
1960	19.12	23.98	26.24	32.37	29.76	32.55	34.28	45.48
1961	17.91	26.26	27.24	27.36	26.47	25.45	15.70 ^a	30.02
1962	10.87	14.12	13.58	17.85	23.90	25.26	27.40	28.47
1963	15.07	16.70	18.99	18.90	18.65	20.66	23.41	19.90
1964	20.75	22.30	23.78	28.29	31.88	27.36	30.65	30.27
1965	21.48	26.21	29.41	30.80	36.65	42.41	45.16	45.00
1966	21.63	20.87	21.54	29.46	21.44	29.05	25.98	27.12
1967	21.95	20.10	23.89	30.33	29.26	26.75	31.74	26.41
1968	17.26	25.20	29.88 ^b	31.91	30.40	35.14	35.97	37.13
1969	28.53	33.38	33.05	32.30	31.42	38.07	33.01	36.59
1970	16.50	13.59	22.13	30.96	22.74	27.79	35.23	32.30
1971	29.46	31.01	31.00	32.96	31.80	45.24	29.43	31.10
1972	21.21	15.49	21.10	25.43	31.49	35.09	42.02	31.90
1973	30.61	30.85	35.14 ^b	47.82	52.28	50.93	51.66	47.91
1974	18.25	30.94	20.93 ^b	36.41 ^b	37.00	41.80	42.85	37.28 ^a
1975	26.62	24.92	23.65	25.84 ^a	25.67	33.49	35.82	48.64
1976	34.40	46.04	40.82	45.21	39.13	45.24	49.06	47.46
1977	15.06	19.90	17.06	19.40	29.64	32.43	24.83	29.69
1978	19.04	18.48	21.28	24.64	35.99	35.17	36.35 ^b	33.08
1979	16.34	32.35	31.44	28.83	36.64	39.97	36.72	38.74
1980	18.33	23.05	22.67	21.27	24.23	39.02	33.69	29.56
1981	28.73	26.24	30.19	27.40	36.37	41.05	43.23	49.62
1982	19.10	23.35	18.44	21.99	22.96	27.64	21.04	22.47 ^b
1983	19.35	24.45 ^a	23.33	20.92 ^b	26.11	34.60	34.13	36.95
1984	16.24	15.33 ^b	20.67	21.19 ^a	25.95	26.97	20.90	8.26 ^b
1985	18.93	5.76 ^a	23.67	21.94	41.43	37.77	37.26	33.54
1986	27.44	29.86 ^b	29.62 ^b	36.01 ^b	42.73	43.52	47.14	42.20
1987	39.45	36.39	38.36	40.09	37.96	39.86	37.33 ^a	37.94
1988	12.08	15.20	13.52	9.81 ^b	19.01	19.49	16.27 ^b	21.50
1989	16.98	18.65	17.26	16.10	22.14	25.14	20.99	25.46
1990	38.24 ^b	24.73	30.06	27.01	38.31	42.51	24.58 ^a	35.14 ^b
1991	23.11	21.77	31.12	34.55	42.76	48.22	56.55	51.07
1992	22.22	27.85 ^a	37.73	45.34	46.49	64.17	38.84 ^b	40.33 ^b
1993	15.18	9.32 ^c	13.20	16.60	32.00	24.02	19.54 ^b	24.01 ^b
1994	22.85 ^a	39.61	29.32	22.38 ^b	40.42	40.98	35.76 ^a	40.85
1995	25.87	19.47	27.55	24.55	23.20	30.29	23.29	32.57
1996	20.32 ^b	16.20	14.20	15.50	17.80	24.57	19.00	28.20
1997	---	27.77	35.74	37.54	33.94	---	41.65	43.56
1998	24.15	27.40 ^b	20.66 ^b	30.44 ^a	42.10	45.74	52.98	58.51
1999	19.88	19.08	2.55 ^b	16.94	16.63	18.67	21.07	19.38
2000	18.11 ^b	23.84	22.87	32.49	35.86	46.30 ^a	36.34 ^b	40.56
2001	18.40	26.02	25.87	30.59	36.72	53.91	37.91	42.41
2002	---	36.79	35.75	44.70	46.27	63.20	43.60	46.16
2003	25.19 ^c	23.39	24.86	34.70	28.45	28.55	23.42	25.74
2004	40.23	27.76	37.99	44.76	45.32	60.50	50.55	52.68
2005	25.13	16.48	20.24	28.90	16.54	25.31	21.01	22.42
2006	14.62	7.85	11.06	12.15	21.34	24.24	28.51	26.36
2007	39.93	28.89	37.55	57.58	47.25	59.00	45.40	41.59
2008	12.59	11.23	14.66	16.18	13.76	14.74	16.70	15.79
2009	14.26	16.19	20.86	25.00	30.69	32.65	28.10	33.10
2010	23.78	18.86	27.13	27.32	37.39	42.06	37.03	27.58 ^b
2011	12.98	9.91	13.81	15.27	17.58	17.76	19.25	19.39
2012	20.35	13.97	18.70	25.96	39.30	29.78	35.49	34.26
2013	21.18 ^a	22.75	22.87	19.48 ^a	31.99	28.95	32.88	31.30
2014	18.92 ^a	21.09	20.62	17.84 ^a	28.20	29.00	23.17	23.84
Years of Record (shown)	77	81	78	81	81	80	81	81
Mean	21.70	23.06	23.79	28.37	30.35	33.94	32.75	33.85
Median	20.32	22.67	22.87	27.56	30.40	32.65	33.35	33.10

Data source: U.S. Department of Commerce (2014); Uvalde data: Texas A&M AgriLIFE Extension Service (2014)

a = Partial record not included in long-term mean; missing one month.

b = Partial record not included in long-term mean; missing more than one month.

c = Change in gauge location from previous years.

--- = No data available.

Mean values calculated using only years with full records. Years with partial or missing records discarded from data set. (NOAA records may exceed the period of record shown in Table 2 for some locations.)

Table 3a. Monthly Precipitation Data from Selected National Oceanic and Atmospheric Administration Precipitation-Gauging Stations, 2014 (measured in inches).

Gauge	County	Jan	Feb	Mar	Apr	May	Jun	July	Aug	Sep	Oct	Nov	Dec	Total
San Antonio Intl. Airport	Bexar	2.83	0.42	1.06	0.68	4.97	5.38	3.25	0.08	1.77	1.91	7.21	1.24	28.20
Vanderpool 10N	Bandera	0.00	0.00	0.32	0.10	8.00	1.10	0.00	1.50	0.94	0.80	1.00	0.07	13.59*
Vanderpool 4N	Bandera	0.15	0.65	0.58	0.35	7.27	1.93	0.65	1.87	2.21	0.86	2.94	0.71	20.11*
New Braunfels	Comal	0.30	0.93	0.11	0.85	6.17	0.53	0.57	0.00	3.97	0.83	7.55	0.97	23.17
San Marcos	Hays	0.95	1.49	1.63	0.54	9.43	1.12	2.38	0.10	1.59	0.79	3.33	1.36	23.84
Kerrville 3 NNE	Kerr	0.12	0.37	0.55	1.93	6.28	1.19	0.30	2.58	3.48	2.29	2.23	0.56	20.59
Hondo	Medina	0.07*	0.85	0.45*	1.12*	4.70*	0.70	2.22	0.90	1.24*	1.03*	3.87	0.45*	17.84*
Brackettville 22N	Kinney	0.02	0.41	0.49	1.43	2.37	2.79	1.60	3.22*	2.85	0.20*	3.16*	0.44*	18.92*
Prade Ranch	Real	0.00	1.10*	0.35	0.00	5.70	4.09*	1.66	2.80	3.25	0.72*	2.74	0.55	22.81*
Sabinal	Uvalde	0.04	0.80	0.74	1.11	7.49	0.97	0.61	3.01	1.26	1.87	2.29	0.49	20.62
Uvalde	Uvalde	0.14	0.62	0.14	1.47	4.94	2.48	2.31	2.17	3.69	0.42	2.19	0.22*	21.09*
Boerne	Kendall	0.16	0.73	0.64	0.45	8.04	2.16	2.58	0.85	4.77	2.98	4.71	1.10	29.00

M = Missing data.

* = Incomplete data set.

Table 3b. Deviation from Mean Rainfall Values, 2014.

Gauge	County	Mean	Total	Deviation from Mean
San Antonio Intl. Airport	Bexar	30.35	28.20	-2.15
New Braunfels	Comal	32.75	23.17	-9.58
San Marcos	Hays	33.85	23.84	-10.01
Hondo	Medina	28.37	17.84*	-10.53
Uvalde	Uvalde	23.06	21.09*	-1.97
Boerne	Kendall	33.94	29.00	-4.94
Brackettville	Kinney	21.70	18.92*	-2.78

* = Incomplete data set for current year, not representative of annual values.
(Rainfall amounts shown in inches.)

Table 4. 2014 Monthly Precipitation Totals from EAA Rain Gauges (Rain-Gauge Locations Shown in Figure 4).

	BA061	BA062	BA073	BA091	BA093	BA108	BE124	BE125	BE127	BE128	BE129	BE130	BE133
January	0	0	0	0.03	0.01	0.01	0.14	0.11	0.02	0.13	0.12	0	0.06
February	0.20	0.22	0.21	0.31	0.26	0.22	0.16	0.17	0.15	0.12	0.06	0.20	0.15
March	0.27	0.23	0.07	0.42	0.37	0.13	0.61	0.65	0.36	1.08	0.52	0.94	0.82
April	0.11	0.04	0.50	0.24	0.21	0.37	0.67	0.50	0.58	1.11	0.73	0.38	0.50
May	5.68	7.00	2.78	1.48	1.78	5.38	5.15	6.25	3.65	4.88	6.00	4.46	4.46
June	1.29	1.12	1.92	0.05	1.27	2.09	1.84	1.36	4.75	2.54	0.92	3.31	1.63
July	0.41	0.52	1.20	0.25	0.52	1.01	6.79	1.33	3.53	4.02	1.75	2.41	3.05
August	2.69	1.83	2.51	3.19	0.45	3.75	0.84	1.49	1.30	0.04	0.17	0.10	1.42
September	2.76	1.76	1.24	5.21	0.95	2.26	1.22	1.21	0.53	2.04	2.92	1.54	1.66
October	0.43	0.53	0.96	2.20	0.84	1.66	2.42	2.10	0.85	2.16	2.82	1.07	2.50
November	2.04	2.40	0.80	3.08	2.12	2.16	5.72	5.44	4.67	4.42	4.95	5.11	4.93
December	0.16	0.16	0.22	0.38	0.20	0.15	0.71	0.57	*	0.68	*	0.68	0.72
2014 totals	16.04	15.81	12.41	16.84	8.98	19.19	26.27	21.18	20.39	23.22	20.96	20.20	21.90

	BE142	BL151	BL156	CO132	CO135	CO138	CO152	ED063	ED064	ED065	ED066	ED075	HA157
January	0.06	0.10	0.01	0.07	0.19	0.08	0.04	0.02	0	0.02	0.35	1.68	1.30
February	0.17	0.25	0.18	0.20	0.18	0.21	0.20	0.60	0.31	0.45	0.01	0	0.43
March	0.80	0.30	0.47	0.66	0.91	0.74	0.82	0.13	0.02	0.16	0.20	0.70	0.96
April	1.18	1.44	1.78	0.53	0.31	0.68	0.19	0.13	0.08	0.25	0.91	0.36	2.02
May	5.41	6.46	5.15	4.90	5.17	5.81	5.60	2.88	2.67	1.81	2.87	2.94	4.25
June	2.23	0.45	0.96	1.41	2.06	1.47	0.96	1.31	1.86	3.11	3.03	0.52	1.00
July	1.69	0.62	0.17	0.66	1.81	3.59	0.84	2.56	0.44	1.38	1.85	1.01	2.54
August	0.13	0.55	0.60	0.16	0.50	1.63	0.25	1.26	3.34	2.76	1.14	0.60	0.32
September	1.18	3.17	3.94	1.27	2.45	1.53	3.16	3.11	1.16	1.97	2.46	1.83	4.08
October	1.19	1.15	1.72	1.35	1.43	1.39	0.41	0.96	0.45	0.45	1.78	0.95	5.49
November	2.14	3.95	4.51	2.43	6.16	8.17	3.26	2.06	1.85	2.05	0.97	1.62	1.51
December	0.55	0.72	0.37	0.88	0.80	0.61	0.94	0.41	0.15	0.36	0.47	0.38	0.87
2014 totals	16.73	19.16	19.86	14.52	21.97	25.91	16.67	15.43	12.33	14.77	10.40	5.27	19.79

* = Incomplete data set. ~~not complete~~

(Table 4. continued)

	BE142	BL151	BL156	CO132	CO135	CO138	CO152	ED063	ED064	ED065	ED066	ED075	HA157
January	1.49	1.83	*	1.58	2.54	2.74	1.85	0.21	0.38	0.34	0.35	1.68	1.30
February	0.20	0.09	*	0.21	0.02	0.21	0.19	0	0	0.06	0.01	0	0.43
March	1.11	1.10	*	0.72	0.91	1.72	0.63	0.37	1.49	0.71	0.20	0.70	0.96
April	2.54	1.14	*	1.25	4.01	2.14	1.07	0.44	0.26	2.67	0.91	0.36	2.02
May	3.07	5.56	*	3.16	5.45	6.80	0.85	4.21	2.54	1.88	2.87	2.94	4.25
June	1.79	1.64	*	1.70	1.30	1.70	0.76	3.69	2.58	3.17	3.03	0.52	1.00
July	0.75	1.59	*	1.80	2.00	1.65	2.05	0.43	2.38	1.11	1.85	1.01	2.54
August	0.18	0.08	*	0.75	0	0.30	0.17	0.26	0.75	0.80	1.14	0.60	0.32
September	3.68	1.89	3.38	3.08	1.58	3.08	2.25	4.11	2.03	3.98	2.46	1.83	4.08
October	1.83	4.55	5.57	5.56	1.12	0.01	4.02	2.02	1.98	2.18	1.78	0.95	5.49
November	1.02	1.08	2.39	0.64	1.63	1.35	0.79	1.15	1.07	1.31	0.97	1.62	1.51
December	0.68	0.31	0.48	0.50	0.70	0.53	0.25	0.64	0.47	0.49	0.47	0.38	0.87
2013 totals	18.34	20.86	11.82	20.95	21.26	22.23	14.88	17.53	15.93	18.7	16.04	12.59	24.77

	HA158	HA160	HA161	HA162	KE068	KE095	KE141	KE155	KI040	KI041	KI043	ME002	ME003
January	0.32	0.29	0.21	0.08	0.01	0.01	0.05	0	0.01	0	0	0.05	0
February	0.43	0.30	0.34	0.29	0.13	0.20	0.20	0.16	0.21	0.93	0.45	0.51	0.36
March	1.33	2.23	1.23	0.93	0.13	0.63	0.30	0.78	0.28	0.21	0.18	0.77	0.43
April	0.46	0.33	1.73	0.27	1.25	0.17	0.25	1.87	0.46	0.29	0.16	0.56	0.99
May	1.06	7.62	8.62	5.99	6.13	6.95	6.29	5.41	1.34	0.49	1.88	3.75	6.62
June	0.53	1.07	0.94	1.15	0.52	0.72	2.91	1.19	0	1.96	3.49	1.78	0.34
July	0.74	0.56	1.80	0.27	0.68	0.55	2.88	0.34	0.31	3.24	2.86	2.08	2.28
August	0.01	*	0.72	0.07	1.91	1.10	0.59	1.95	0.62	2.83	2.48	0.40	0.71
September	1.51	*	6.59	3.05	2.87	3.55	2.31	3.80	2.20	2.73	2.00	3.03	0.91
October	0.40	*	1.47	0.84	1.25	3.19	1.78	1.25	0.24	0.46	0.66	0.56	0.99
November	0.58	*	7.75	4.20	0.74	3.50	3.66	4.08	1.98	1.78	2.24	2.51	3.42
December	0.95	*	1.39	0.52	0.11	0.44	0.62	0.50	0.17	0.25	0.23	0.40	0.31
2014 totals	8.32	12.40	32.79	17.66	15.73	21.01	21.84	21.33	7.82	15.17	16.63	16.40	17.36


	ME005	ME006	ME007	ME008	ME010	ME011	ME015	ME094	ME097	ME098	ME099	ME101	ME102
January	0	0.01	0	0.01	0	0	0	0.08	0.11	0.08	0.03	0.03	0.01
February	0.21	0.64	0.63	0.20	0.30	0.42	0.26	0.25	0.17	0.33	0.05	0.24	0.23
March	0.26	0.71	0.40	0.32	0.40	0.34	0.51	0.71	0.48	0.67	0.69	0.44	0.37
April	0.47	0.52	1.02	0.33	0.27	0.15	0.72	1.46	1.21	0.81	0.74	0.78	0.36
May	2.05	5.20	5.37	5.71	6.96	5.78	6.15	4.58	5.98	4.79	2.30	6.59	5.90
June	0.51	0.58	0.50	0.70	0.65	2.43	1.45	1.52	2.34	0.66	0.25	0.93	1.20
July	0.08	1.50	0.74	1.13	2.04	0.44	0	1.05	1.32	1.82	1.52	1.03	1.16
August	0.25	0.20	0.71	2.04	3.96	4.93	0.34	0.02	0.43	0.18	0.41	1.49	2.83
September	0.34	2.78	1.12	1.50	1.92	2.11	2.58	3.00	1.59	1.94	2.10	2.00	2.96
October	0.53	1.16	0.44	1.15	1.01	1.43	0.57	1.08	1.57	0.68	1.43	2.04	1.17
November	2.27	3.51	3.43	2.35	2.49	2.24	3.84	4.09	3.79	3.15	2.66	2.73	2.48
December	0.17	0.47	0.33	0.26	0.18	0.33	0.44	0.56	0.48	0.59	0.43	0.46	0.28
2014 totals	7.14	17.28	14.69	15.70	20.18	20.60	16.86	18.40	19.47	15.70	12.61	18.76	18.95

	ME103	RE067	RE069	RE070	RE071	RE072	RE074	UV012	UV013	UV016	UV017	UV018	UV019
January	0	*	0	0	0	0	0	0.01	0.01	0	0.05	0	0.05
February	0.32	*	0.29	0.41	0.41	0.21	0.19	0.74	0.48	0.62	0.32	0.32	0.40
March	0.35	*	0.49	0	0.01	0	0.02	0.61	0.52	0.37	0.49	0.16	0.51
April	0.26	*	0.21	0.05	0	0.14	0.26	0.94	0.01	0.90	0.84	0.23	0.67
May	4.65	*	5.01	6.22	0	3.28	2.79	6.34	*	4.99	1.42	7.46	4.01
June	1.44	*	2.08	4.75	2.09	2.20	1.76	0.52	0	2.06	4.40	1.54	0.37
July	1.52	*	1.01	0.49	0.86	1.56	0.40	1.26	2.90	0.96	1.88	0.88	0.15
August	1.97	0.03	2.52	1.68	1.28	2.30	2.41	2.68	2.83	5.42	0.24	6.10	2.79
September	2.84	1.75	4.33	4.07	2.65	2.38	1.10	1.80	0.77	2.99	4.83	2.46	1.69
October	1.28	2.20	0.53	0.42	0.48	0.79	1.55	1.16	0.58	1.18	1.98	0.84	0.55
November	2.11	1.73	2.22	0.47	1.53	1.98	1.40	2.01	0.40	1.61	2.36	2.57	2.00
December	0.22	0.42	0.46	0.35	0.30	0.18	0.27	0.24	0.18	0.11	0.31	0.27	0.20
2014 totals	16.96	6.13	19.15	18.91	9.61	15.02	12.15	18.31	8.68	21.21	19.12	22.83	13.39

	UV031	UV032	UV033	UV034	UV035	UV036	UV037	UV039	UV042	UV044
January	0.02	0	0.05	0	0	0.02	0.06	0	0	0
February	0.47	0.30	0.30	0.33	0.64	0.25	0.31	1.31	0.62	0.50
March	0.56	0.42	0.49	0.34	0.22	0.50	0.35	0.17	0.20	0.50
April	0.76	0.23	1.66	0.86	0.21	0.68	1.81	0.11	0.11	0.38
May	4.69	0.60	5.75	2.62	3.82	2.10	1.06	2.25	2.97	1.03
June	3.92	1.05	2.75	1.38	1.58	2.28	0.86	0.93	0.94	1.96
July	1.82	1.89	2.82	3.92	1.07	2.69	2.58	3.25	2.22	0.57
August	0.66	0.33	1.26	3.00	2.89	2.88	2.55	1.73	2.00	4.20
September	3.66	1.53	5.17	0.75	2.45	2.45	2.32	0.93	2.59	2.48
October	0.26	0.07	0.42	0.39	0.54	0.16	0.19	0.48	0.80	0.79
November	2.12	1.33	1.82	0.16	1.83	2.03	0.03	1.70	2.06	1.89
December	0.30	0.04	0.13	0.15	0.20	0.42	0.31	0.14	0.09	0.23
2014 totals	19.24	7.79	22.62	13.90	15.45	16.46	12.43	13.00	14.60	14.53

* = Incomplete data set.

Figure 6. Ground-Calibrated NEXRAD Radar Rainfall Distribution for 2014

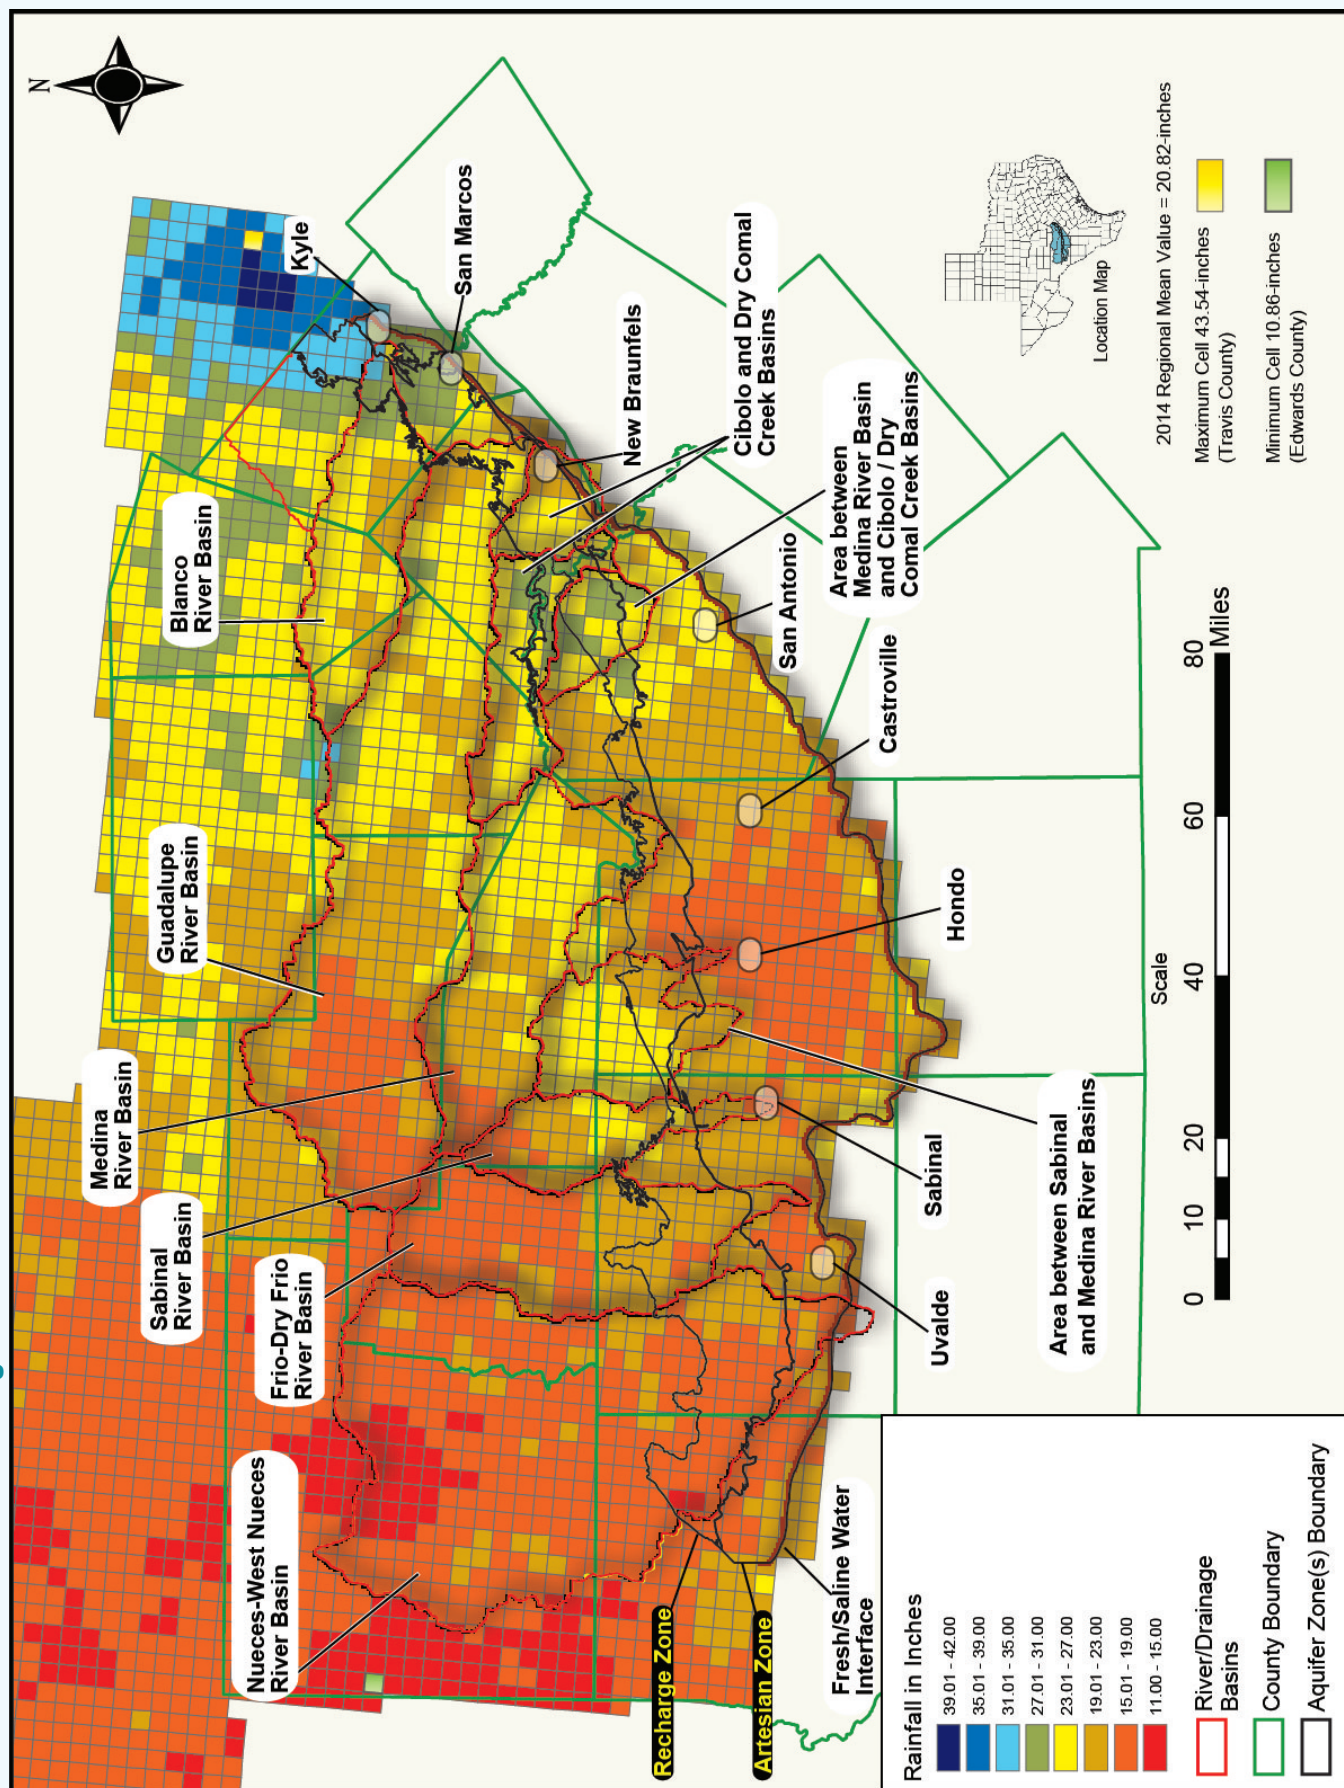

Precipitation Enhancement Program (PEP)

Since 1998, the EAA has funded a Precipitation Enhancement Program (PEP) in an effort to enhance rainfall in strategic parts of the EAA jurisdiction. Specifically, the goals of the PEP are to

- Enhance rainfall in a targeted area by using state-of-the-art cloud-seeding technology and procedures to seed suitable convective clouds,
- Increase aquifer recharge,
- Increase the annual mean quantity of water that may be withdrawn from the aquifer,
- Reduce demands from the aquifer by increasing precipitation, and
- Reduce periods of low water levels and protect threatened springflows.

Precipitation enhancement is accomplished by cloud-seeding operations over multiple counties in south central

Texas. On the basis of reports prepared by the South Texas Weather Modification Association (STWMA) and the Southwest Texas Rain Enhancement Association (SWTREA), EAA's PEP contractors, program analyses for 2014 indicate an increase of 75,000 acre-feet of rainfall within the four-county target area. The area is just over 3.1 million acres in size, resulting in an average increased rainfall amount of approximately 0.27 inch. This estimate of precipitation enhancement is based on statistical comparisons of seeded storm systems with comparable systems that were not seeded. The estimated enhancement is inherently uncertain owing to the limited number of storm systems that can be used for comparison and numerous other factors that may affect rainfall variability. The EAA continues to monitor the effectiveness of PEP activities.

GROUNDWATER RECHARGE

Recharge to the Edwards Aquifer originates as precipitation over the drainage area and recharge zone of the aquifer or as interformational flow from adjacent aquifers. The EAA maintains a joint funding agreement with the U.S. Geological Survey (USGS) to provide recharge estimates by drainage basin (Figure 7). Recharge is estimated using a water-balance method that relies on precipitation and streamflow measurements across the region.

Table 5 lists estimated annual recharge by drainage basin from 1934 through 2014 on the basis of USGS calculations. The USGS estimates that annual recharge for the period of record (1934–2014) ranged from 43,700 acre-feet at the height of the drought of record in 1956 to 2,486,000 acre-feet in 1992. In 2014, estimated recharge was 107,200 acre-feet. The median annual recharge for 1934 through 2014 is 556,100 acre-feet. Recharge estimates shown in Table 5 do not include the Guadalupe River Basin because the historical method of estimating recharge is based on the interpretation that the basin does not provide significant recharge to the aquifer.

The 2014 estimated recharge volume of 107,200 acre-feet was well below the period of record (1934–2014) median recharge value of 556,100 acre-feet; the corresponding mean value is 692,080 acre-feet. Figure 8 provides a graphical representation of annual estimated recharge compared with the most recent ten-year median and period-of-record median for the San Antonio segment of the Balcones Fault Zone Edwards Aquifer from 1934 through 2014.

The EAA operates four recharge structures in Medina County on the Edwards Aquifer Recharge Zone (Figure 7). Total recharge for each site is estimated using data from stage recorders near these structures. Table 6 shows the annual recharge (total recharge) for each site since construction. Combined recharge for these structures was 1,116 acre-feet in 2014.

Historical median and mean annual recharge attributed to the recharge structures is based on a period of record that reflects the date of construction through 2014. The approximate historical median annual recharge contributed by the combined structures is 842 acre-feet, whereas the approximate historical mean annual recharge contributed by the combined structures is 4,551 acre-feet.

The methodology for calculating recharge is being refined using the Hydrologic Simulation Program FORTTRAN (HSPF) model. HSPF modeling performed to date indicates similar historical total recharge relative to the traditional USGS method; however, differences by basin are noteworthy. As additional HSPF output data are generated and refined, results may be incorporated into future versions of this report.

Recharge resulting from interformational flow in adjacent aquifers such as the Trinity Aquifer is not estimated annually. Estimates associated with interformational flow are highly variable and range from 5,000 to 100,000 acre-feet per year in different publications. Estimated interformational recharge is not included in recharge values provided in this report.

Figure 7. Major Drainage Basins and Edwards Aquifer Authority-Operated Recharge Structures in the San Antonio Segment of the Balcones Fault Zone Edwards Aquifer

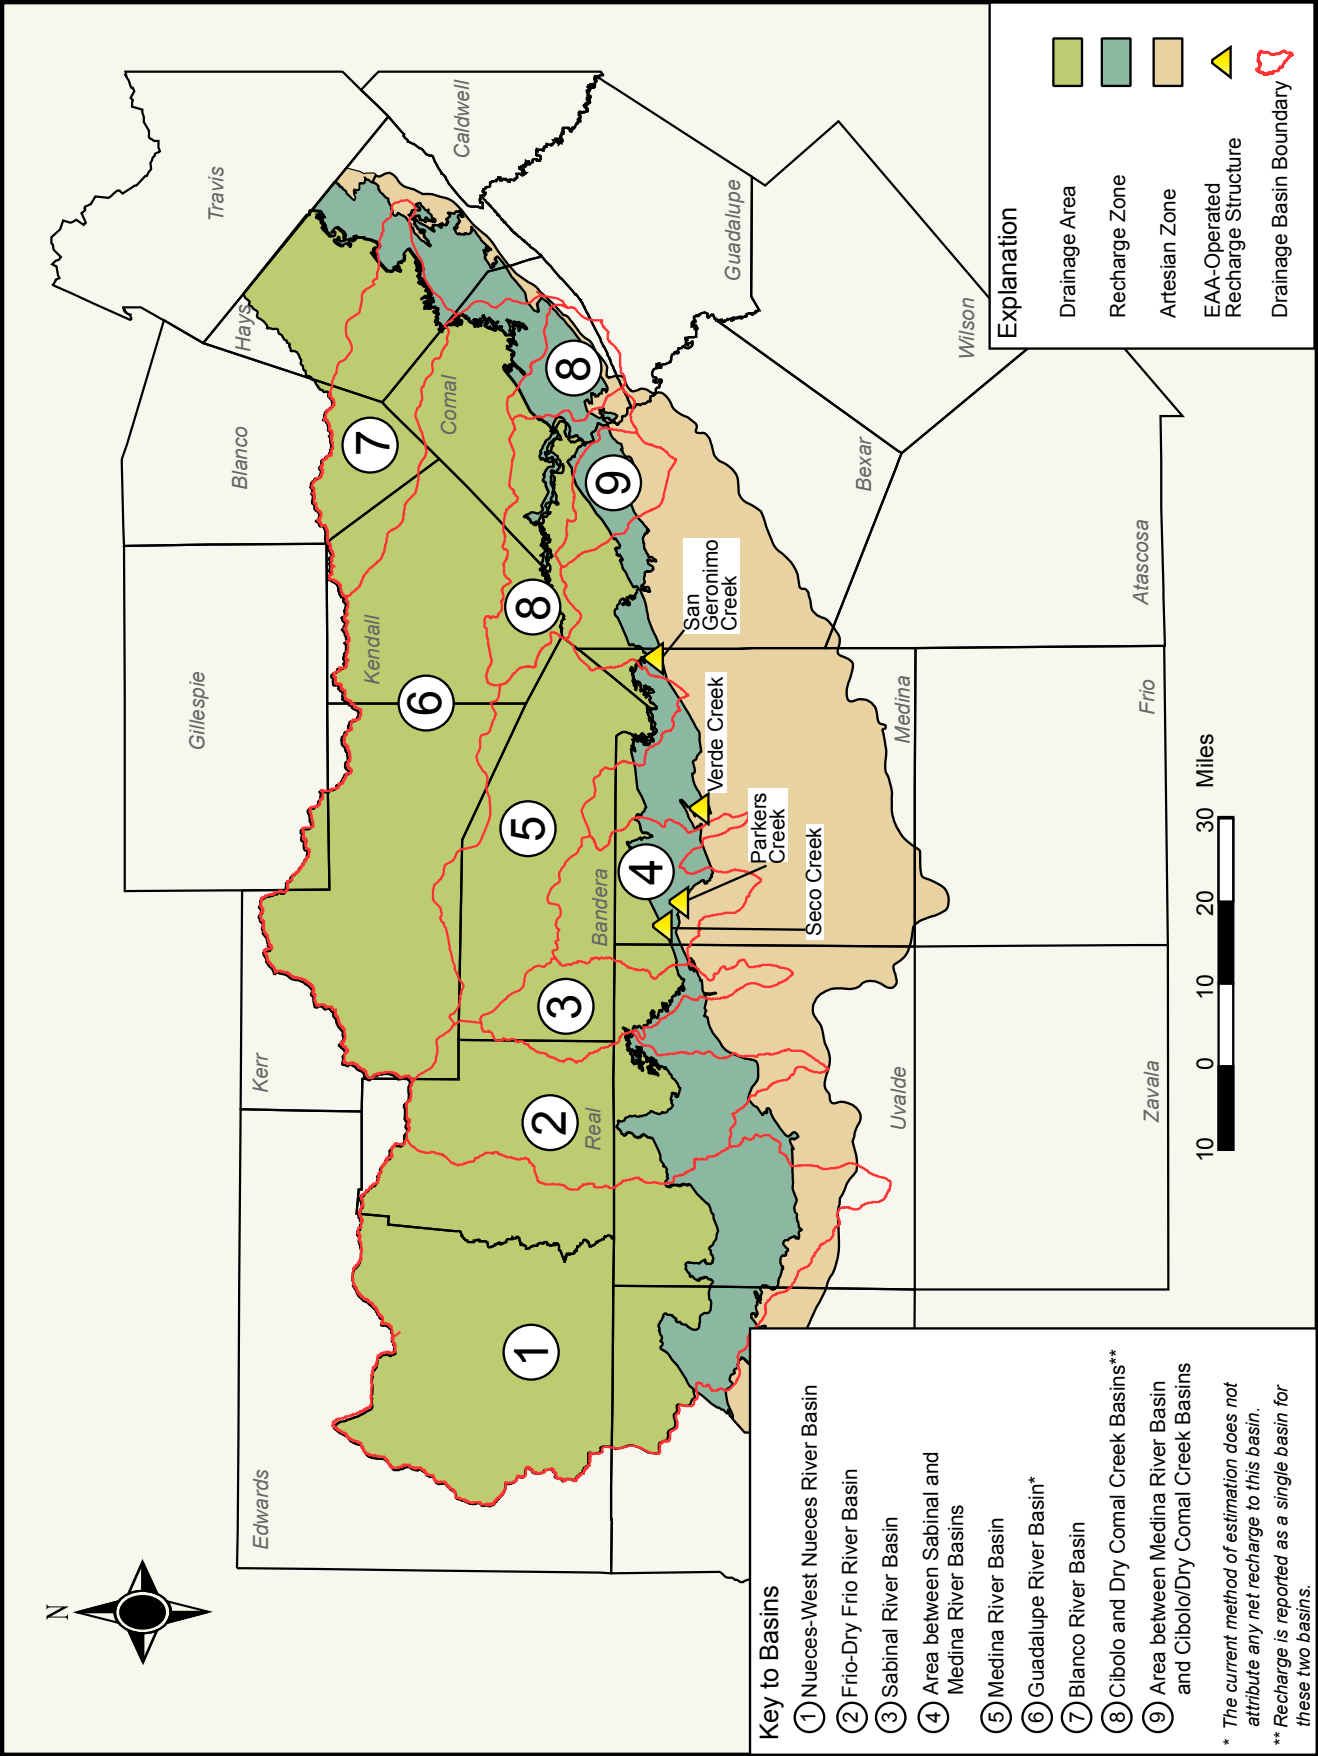


Table 5. Estimated Annual Groundwater Recharge to the Edwards Aquifer by Drainage Basin, 1934–2014 (measured in thousands of acre-feet).

Year	Nueces River/ West Nueces River basin	Frio River/ Dry Frio River basin	Sabinal River Basin	Area between Sabinal River and Medina River basins	Medina River Basin	Area between Medina River and Cibolo Creek/ Dry Comal Creek basins	Cibolo Creek/ Dry Comal Creek basin	Blanco River Basin	Total
1934	8.6	27.9	7.5	19.9	46.5	21.0	28.4	19.8	179.6
1935	411.3	192.3	56.6	166.2	71.1	138.2	182.7	39.8	1,258.2
1936	176.5	157.4	43.5	142.9	91.6	108.9	146.1	42.7	909.6
1937	28.8	75.7	21.5	61.3	80.5	47.8	63.9	21.2	400.7
1938	63.5	69.3	20.9	54.1	65.5	46.2	76.8	36.4	432.7
1939	227.0	49.5	17.0	33.1	42.4	9.3	9.6	11.1	399.0
1940	50.4	60.3	23.8	56.6	38.8	29.3	30.8	18.8	308.8
1941	89.9	151.8	50.6	139.0	54.1	116.3	191.2	57.8	850.7
1942	103.5	95.1	34.0	84.4	51.7	66.9	93.6	28.6	557.8
1943	36.5	42.3	11.1	33.8	41.5	29.5	58.3	20.1	273.1
1944	64.1	76.0	24.8	74.3	50.5	72.5	152.5	46.2	560.9
1945	47.3	71.1	30.8	78.6	54.8	79.6	129.9	35.7	527.8
1946	80.9	54.2	16.5	52.0	51.4	105.1	155.3	40.7	556.1
1947	72.4	77.7	16.7	45.2	44.0	55.5	79.5	31.6	422.6
1948	41.1	25.6	26.0	20.2	14.8	17.5	19.9	13.2	178.3
1949	166.0	86.1	31.5	70.3	33.0	41.8	55.9	23.5	508.1
1950	41.5	35.5	13.3	27.0	23.6	17.3	24.6	17.4	200.2
1951	18.3	28.4	7.3	26.4	21.1	15.3	12.5	10.6	139.9
1952	27.9	15.7	3.2	30.2	25.4	50.1	102.3	20.7	275.5
1953	21.4	15.1	3.2	4.4	36.2	20.1	42.3	24.9	167.6
1954	61.3	31.6	7.1	11.9	25.3	4.2	10.0	10.7	162.1
1955	128.0	22.1	0.6	7.7	16.5	4.3	3.3	9.5	192.0
1956	15.6	4.2	1.6	3.6	6.3	2.0	2.2	8.2	43.7
1957	108.6	133.6	65.4	129.5	55.6	175.6	397.9	76.4	1,142.6
1958	266.7	300.0	223.8	294.9	95.5	190.9	268.7	70.7	1,711.2
1959	109.6	158.9	61.6	96.7	94.7	57.4	77.9	33.6	690.4
1960	88.7	128.1	64.9	127.0	104.0	89.7	160.0	62.4	824.8
1961	85.2	151.3	57.4	105.4	88.3	69.3	110.8	49.4	717.1
1962	47.4	46.6	4.3	23.5	57.3	16.7	24.7	18.9	239.4
1963	39.7	27.0	5.0	10.3	41.9	9.3	21.3	16.2	170.7
1964	126.1	57.1	16.3	61.3	43.3	35.8	51.1	22.2	413.2
1965	97.9	83.0	23.2	104.0	54.6	78.8	115.3	66.7	623.5
1966	169.2	134.0	37.7	78.2	50.5	44.5	66.5	34.6	615.2
1967	82.2	137.9	30.4	64.8	44.7	30.2	57.3	19.0	466.5
1968	130.8	176.0	66.4	198.7	59.9	83.1	120.5	49.3	884.7
1969	119.7	113.8	30.7	84.2	55.4	60.2	99.9	46.6	610.5
1970	112.6	141.9	35.4	81.6	68.0	68.8	113.8	39.5	661.6
1971	263.4	212.4	39.2	155.6	68.7	81.4	82.4	22.2	925.3
1972	108.4	144.6	49.0	154.6	87.9	74.3	104.2	33.4	756.4
1973	190.6	256.9	123.9	286.4	97.6	237.2	211.7	82.2	1,486.5

(Table 5. continued)

Year	Nueces River/ West Nueces River basin	Frio River/ Dry Frio River basin	Sabinal River Basin	Area between Sabinal River and Medina River basins	Medina River Basin	Area between Medina River and Cibolo Creek/ Dry Comal Creek basins	Cibolo Creek/ Dry Comal Creek basin	Blanco River Basin	Total
1974	91.1	135.7	36.1	115.3	96.2	68.1	76.9	39.1	658.5
1975	71.8	143.6	47.9	195.9	93.4	138.8	195.7	85.9	973.0
1976	150.7	238.6	68.2	182.0	94.5	47.9	54.3	57.9	894.1
1977	102.9	193.0	62.7	159.5	77.7	97.9	191.6	66.7	952.0
1978	69.8	73.1	30.9	103.7	76.7	49.6	72.4	26.3	502.5
1979	128.4	201.4	68.6	203.1	89.4	85.4	266.3	75.2	1,117.8
1980	58.6	85.6	42.6	25.3	88.3	18.8	55.4	31.8	406.4
1981	205.0	365.2	105.6	252.1	91.3	165.0	196.8	67.3	1,448.4
1982	19.4	123.4	21.0	90.9	76.8	22.6	44.8	23.5	422.4
1983	79.2	85.9	20.1	42.9	74.4	31.9	62.5	23.2	420.1
1984	32.4	40.4	8.8	18.1	43.9	11.3	16.9	25.9	197.7
1985	105.9	186.9	50.7	148.5	64.7	136.7	259.2	50.7	1,003.3
1986	188.4	192.8	42.2	173.6	74.7	170.2	267.4	44.5	1,153.7
1987	308.5	473.3	110.7	405.5	90.4	229.3	270.9	114.9	2,003.6
1988	59.2	117.9	17.0	24.9	69.9	12.6	28.5	25.5	355.5
1989	52.6	52.6	8.4	13.5	46.9	4.6	12.3	23.6	214.4
1990	479.3	255.0	54.6	131.2	54.0	35.9	71.8	41.3	1,123.2
1991	325.2	421.0	103.1	315.2	52.8	84.5	109.7	96.9	1,508.4
1992	234.1	586.9	201.1	566.1	91.4	290.6	286.6	226.9	2,485.7
1993	32.6	78.5	29.6	60.8	78.5	38.9	90.9	37.8	447.6
1994	124.6	151.5	29.5	45.1	61.1	34.1	55.6	36.6	538.1
1995	107.1	147.6	34.7	62.4	61.7	36.2	51.1	30.6	531.3
1996	130.0	92.0	11.4	9.4	42.3	10.6	14.7	13.9	324.3
1997	176.9	209.1	57.0	208.4	63.3	193.4	144.2	82.3	1,134.6
1998	141.5	214.8	72.5	201.4	80.3	86.2	240.9	104.7	1,142.3
1999	101.4	136.8	30.8	57.2	77.1	21.2	27.9	21.0	473.5
2000	238.4	123.0	33.1	55.2	53.4	28.6	48.6	34.1	614.5
2001	297.5	126.7	66.2	124.1	90.0	101.5	173.7	89.7	1,069.4
2002	83.6	207.3	70.6	345.2	93.7	175.5	447.8	150.0	1,573.7
2003	149.8	112.2	31.7	67.4	86.6	56.2	105.0	59.9	669.0
2004	481.9	424.5	116.0	343.9	95.5	213.4	315.0	185.8	2,176.1
2005	105.5	147.2	50.1	79.1	82.8	84.8	140.4	74.1	764.0
2006	45.5	60.2	9.0	5.0	47.7	5.1	11.2	17.9	201.6
2007	471.8	474.4	104.0	406.4	75.2	227.6	306.1	96.9	2,162.3
2008	48.2	44.5	5.9	9.8	53.6	9.6	22.8	18.5	212.9
2009	58.5	30.3	1.8	13.5	45.6	7.3	26.4	27.5	210.9
2010	135.4	104.9	31.5	186.3	68.2	81.4	148.2	57.5	813.5
2011	15.3	13.7	1.0	2.0	43.3	3.0	15.3	18.3	112.0
2012	78.3	82.6	8.9	14.4	41.6	3.9	32.2	51.6	313.5
2013	67.7	26.7	0.5	2.8	10.8	3.3	28.7	42.1	182.6
2014	19.8	32.8	4.9	14.4	8.9	0.4	9.5	16.5	107.2
Recharge for period of record 1934–2014:									
Median	99.9	113.8	30.9	74.3	59.9	49.6	76.9	35.7	556.1
Mean	123.5	134.3	40.8	108.4	61.3	69.5	108.0	46.3	692.1
Recharge for period of record 2005–2014 (last ten years):									
Median	63.1	52.4	7.4	14.0	46.7	6.2	27.6	34.8	211.9
Mean	104.6	101.7	21.8	73.4	47.8	42.6	74.1	42.1	508.0

Data source: USGS Unpublished Report (April 2015).

Figure 8. Estimated Annual Recharge and Ten-Year Floating Median Estimated Recharge for the San Antonio Segment of the Balcones Fault Zone Edwards Aquifer, 1934–2014

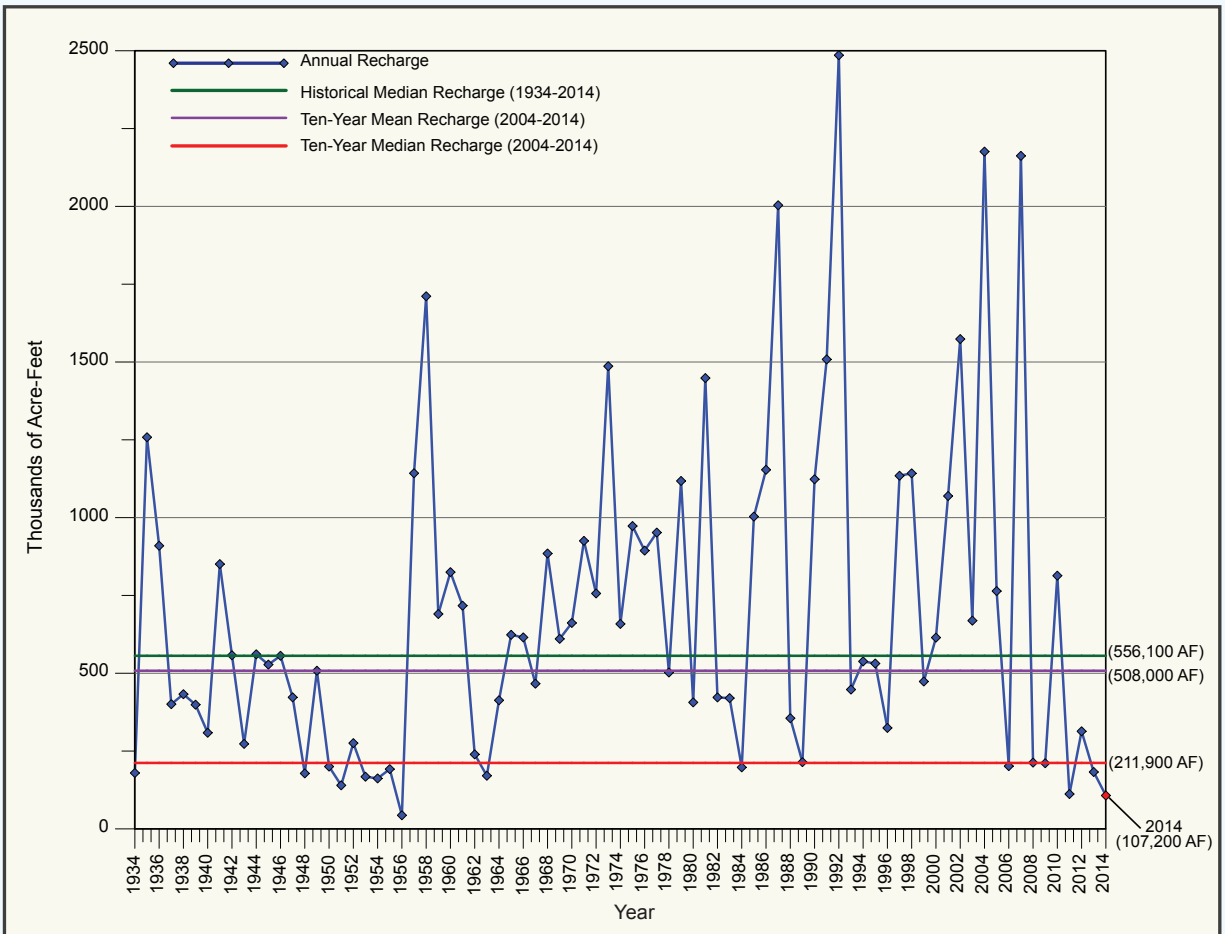


Table 6. Estimated Annual Edwards Aquifer Recharge from Edwards Aquifer Authority-Operated Recharge Structures (measured in acre-feet).

Year	Parker (April 1974)	Verde (April 1978)	San Geronimo (November 1979)	Seco (October 1982)	Annual Total
1974	160	---	---	---	160
1975	620	---	---	---	620
1976	2,018	---	---	---	2,018
1977	6	---	---	---	6
1978	98	150	---	---	248
1979	2,315	1,725	0	---	4,040
1980	0	371	903	---	1,274
1981	772	1,923	1,407	---	4,102
1982	3	112	91	0	206
1983	0	254	0	0	254
1984	251	246	0	143	640
1985	232	440	1,097	643	2,412
1986	217	889	963	1,580	3,649
1987	2,104	4,141	1,176	12,915	20,336
1988	0	0	0	0	0
1989	0	0	0	0	0
1990	49	176	41	479	745
1991	647	966	1,647	2,160	5,420
1992	723	2,775	2,874	14,631	21,003
1993	0	0	334	508	842
1994	159	0	0	5	164
1995	18	79	51	880	1,028
1996	0	0	0	0	0
1997	2,941 ^a	2,154 ^b	1,579 ^b	7,515 ^b	14,189 ^b
1998	1,469 ^{a/b}	1,160 ^b	872 ^b	3,796 ^b	7,297 ^b
1999	0 ^b	0 ^b	0 ^b	50 ^c	50 ^{b/c}
2000	901 ^b	1,371 ^b	1,023 ^b	4,606 ^b	7,901 ^b
2001	526 ^b	657 ^{b/d}	1,085 ^{b/d}	2,154 ^{b/d}	4,422 ^{b/d}
2002	1,811	1,511	4,350	18,872	26,544
2003	665	184	0	465	1,314
2004	2,363	170	4,778	14,682	21,993
2005	795	0	0	58	853
2006	0	0	0	0	0
2007	5,998	2,091	7,268	10,645	26,002
2008	2.6	2.5	0	0	5
2009	630.3	30.5	0.1	27.5	688.4
2010	1,356.4	1,324	4,375.1	6,170.7	13,226.2
2011	10.1	4.5	1.0	0	15.6
2012	1.0	51.2	0	97.5	149.7
2013	0.6	0	0	0.4	1.0
2014	759.0	38.0	0	319.4	1,116.4
Total	30,621	24,996	35,915	103,403	194,934
Median	232	176	46	465	842
Mean	747	676	998	3,133	4,551

Data source: Unpublished Edwards Aquifer Authority files (2014).

a = Written communication from USGS, San Antonio Subdistrict Office.

b = Determined by linear-regression analysis using rainfall data and historical recharge data.

c = Linear-regression analysis indicates zero recharge; however, one recharge event was observed that was estimated to have recharged 50 acre-feet.

d = Part of 2001 recharge estimate provided by HDR Engineering, Inc. (unpublished report).

--- = Years prior to construction of recharge structure.

GROUNDWATER DISCHARGE AND USAGE

Groundwater discharges from the Edwards Aquifer either as springflow or as withdrawals from wells. Comal and San Marcos springs, the largest and second-largest springs in Texas, respectively, are fed by the Edwards Aquifer. This springflow is the primary basis of the recreational economies in New Braunfels and San Marcos, and both springs provide habitat for threatened and endangered animal and plant species. Figure 9 shows locations of the major springs in the Edwards Aquifer region. Wells drilled into the Edwards Aquifer provide water for many diverse uses in south central Texas, including irrigation, municipal water supplies, industrial applications, and domestic/livestock consumption. The amount of groundwater discharged as springflow has historically been greater than the amount discharged through pumping wells.

Estimates of annual total groundwater discharge from springflow and pumping for the Edwards Aquifer are provided in Table 7 for the period of record (1934–2014) by county. Annual total groundwater discharge estimates range from a low of 388,800 acre-feet in 1955 to a high of 1,130,000 acre-feet in 1992. In 2014, the total groundwater discharged from the Edwards Aquifer from wells and springs was estimated at 527,549 acre-feet.

Springflow is calculated by measuring streamflow downstream of the springs and converting the streamflow measurements to spring discharge. Electronic data loggers are used to record streamflow at Leona, Hueco, Comal, and San Marcos springs, whereas periodic flow measurements are taken at San Pedro and San Antonio springs. Springflow from 1934 through 2014 varied from a low of 69,800 acre-feet in 1956 to a high of 802,800 acre-feet in 1992 (Table 7). Monthly springflow estimates for 2014 at each of the six major Edwards Aquifer springs are provided in Table 8. Total springflow from the Edwards Aquifer for 2014 was calculated at 195,390 acre-feet. Las Moras Springs flow is not measured by the EAA because it is outside the EAA's jurisdictional area. Furthermore, recent studies indicate that groundwater in Kinney County has limited contribution to the Uvalde or San Antonio pools of the Edwards Aquifer (Green et al., 2006).

In Figure 10, flows at Comal and San Marcos springs are shown as annual flows in cubic feet per second (cfs) for each year of record, compared with mean flow for the entire period represented on the graph. Generally, wet years plot above the period of record mean line, whereas dry years plot below the line. For 2014, both springs had annual mean flow values below the period-of-record mean discharge.

For the purposes of this report, well discharge is either unreported discharge or reported discharge. Unreported discharge refers to use that does not require a groundwater withdrawal permit from the EAA, such as domestic, livestock, or federal facility use. Reported discharge refers to water pumped from the aquifer by a person or entity holding a groundwater withdrawal permit. These users, who are typically larger quantity users, meter their withdrawals and report the totals to the EAA. Unreported discharge is estimated rather than metered. In 2014, unreported discharge for domestic and livestock wells was estimated at 13,894 acre-feet, and non-reporting facility discharge was estimated at 5,317 acre-feet, for a total of 19,211 acre-feet. Reported discharge totaled 312,948 acre-feet. Total estimated well discharge for the year was 332,159 acre-feet.

Table 9 provides a comprehensive summary of well and spring discharge information from the Edwards Aquifer for 2014. The table reports discharge that is based on type of use by county in acre-feet. Well discharge and springflow totals for the period of record are compared graphically in Figure 11, which shows the variability in well discharge and springflow over the period of record. Well discharge is generally highest in dry years, whereas springflow is highest in wet years. Figure 12 shows discharge that is based on percentages for wells versus springs and discharge by type of use for wells versus springs. Table 10 shows total discharge data by use for the period 1955–2014 for counties in the region.

In 2001, the EAA implemented a well-construction permitting system requiring a well-construction permit

(continued on p. 36)

Figure 9. Major Springs in the Southern Segment of the Balcones Fault Zone Edwards Aquifer

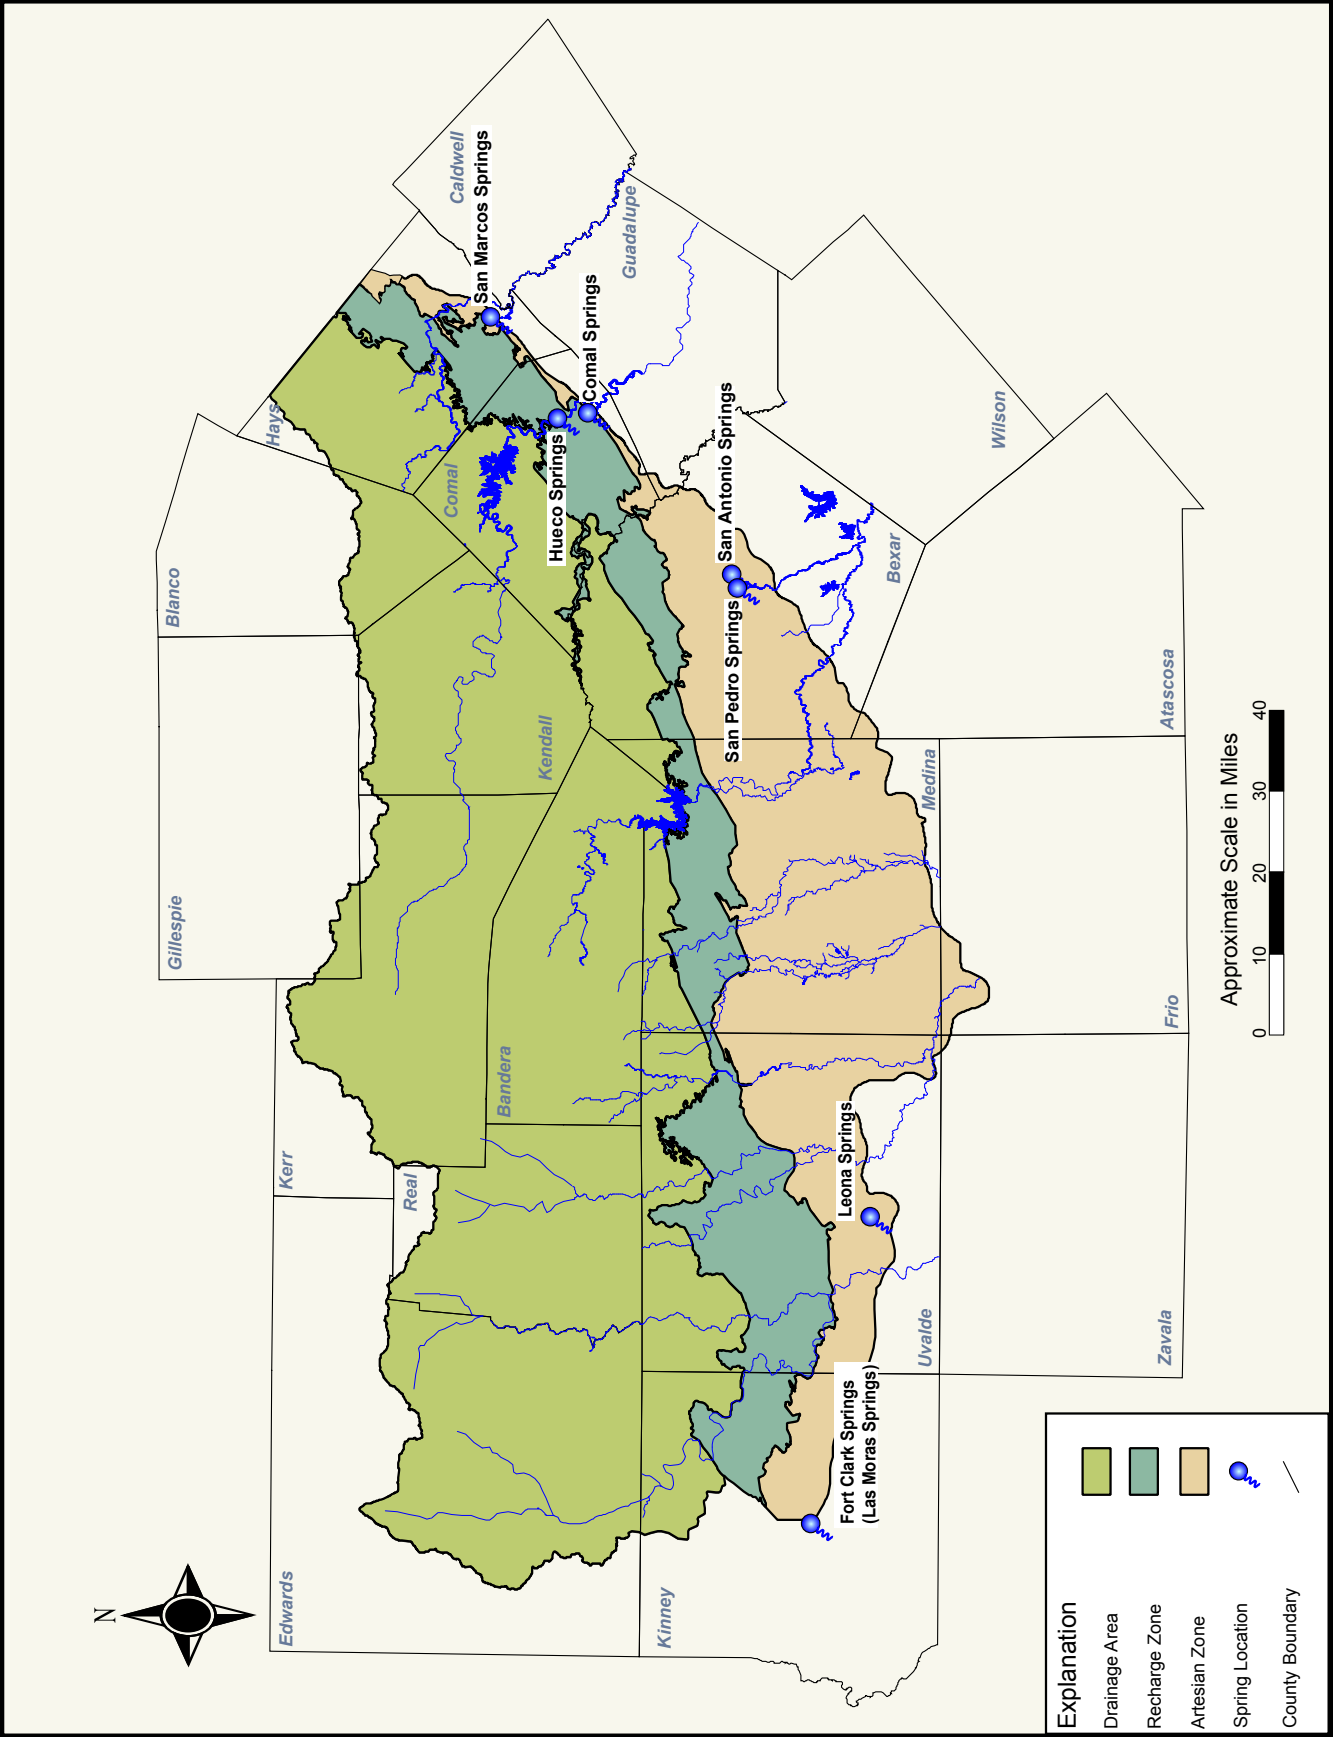


Table 7. Annual Estimated Groundwater Discharge Data by County for Edwards Aquifer, 1934–2014 (measured in thousands of acre-feet).

Year	Uvalde ^a	Medina	Bexar ^b	Comal ^c	Hays	Total	Total Wells	Total Springs
1934	12.6	1.3	109.3	229.1	85.6	437.9	101.9	336.0
1935	12.2	1.5	171.8	237.2	96.9	519.6	103.7	415.9
1936	26.6	1.5	215.2	261.7	93.2	598.2	112.7	485.5
1937	28.3	1.5	201.8	252.5	87.1	571.2	120.2	451.0
1938	25.2	1.6	187.6	250.0	93.4	557.8	120.1	437.7
1939	18.2	1.6	122.5	219.4	71.1	432.8	118.9	313.9
1940	16.1	1.6	116.7	203.8	78.4	416.6	120.1	296.5
1941	17.9	1.6	197.4	250.0	134.3	601.2	136.8	464.4
1942	22.5	1.7	203.2	255.1	112.2	594.7	144.6	450.1
1943	19.2	1.7	172.0	249.2	97.2	539.3	149.1	390.2
1944	11.6	1.7	166.3	252.5	135.3	567.4	147.3	420.1
1945	12.4	1.7	199.8	263.1	137.8	614.8	153.3	461.5
1946	6.2	1.7	180.1	261.9	134.0	583.9	155.0	428.9
1947	13.8	2.0	193.3	256.8	127.6	593.5	167.0	426.5
1948	9.2	1.9	159.2	203.0	77.3	450.6	168.7	281.9
1949	13.2	2.0	165.3	209.5	89.8	479.8	179.4	300.4
1950	17.8	2.2	177.3	191.1	78.3	466.7	193.8	272.9
1951	16.9	2.2	186.9	150.5	69.1	425.6	209.7	215.9
1952	22.7	3.1	187.1	133.2	78.8	424.9	215.4	209.5
1953	27.5	4.0	193.7	141.7	101.4	468.3	229.8	238.5
1954	26.6	6.3	208.9	101.0	81.5	424.3	246.2	178.1
1955	28.3	11.1	215.2	70.1	64.1	388.8	261.0	127.8
1956	59.6	17.7	229.6	33.6	50.4	390.9	321.1	69.8
1957	29.0	11.9	189.4	113.2	113.0	456.5	237.3	219.2
1958	23.7	6.6	199.5	231.8	155.9	617.5	219.3	398.2
1959	43.0	8.3	217.5	231.7	118.5	619.0	234.5	384.5
1960	53.7	7.6	215.4	235.2	143.5	655.4	227.1	428.3
1961	56.5	6.4	230.3	249.5	140.8	683.5	228.2	455.3
1962	64.6	8.1	220.0	197.5	98.8	589.0	267.9	321.1
1963	51.4	9.7	217.3	155.7	81.9	516.0	276.4	239.6
1964	49.3	8.6	201.0	141.8	73.3	474.0	260.2	213.8
1965	46.8	10.0	201.1	194.7	126.3	578.9	256.1	322.8
1966	48.5	10.4	198.0	198.9	115.4	571.2	255.9	315.3
1967	81.1	15.2	239.7	139.1	82.3	557.4	341.3	216.1
1968	58.0	9.9	207.1	238.2	146.8	660.0	251.7	408.3
1969	88.5	13.6	216.3	218.2	122.1	658.7	307.5	351.2
1970	100.9	16.5	230.6	229.2	149.9	727.1	329.4	397.7
1971	117.0	32.4	262.8	168.2	99.1	679.5	406.8	272.7
1972	112.6	28.8	247.7	234.3	123.7	747.1	371.3	375.8
1973	96.5	14.9	273.0	289.3	164.3	838.0	310.4	527.6
1974	133.3	28.6	272.1	286.1	141.1	861.2	377.4	483.8
1975	112.0	22.6	259.0	296.0	178.6	868.2	327.8	540.4
1976	136.4	19.4	253.2	279.7	164.7	853.4	349.5	503.9
1977	156.5	19.9	317.5	295.0	172.0	960.9	380.6	580.3
1978	154.3	38.7	269.5	245.7	99.1	807.3	431.8	375.5
1979	130.1	32.9	294.5	300.0	157.0	914.5	391.5	523.0
1980	151.0	39.9	300.3	220.3	107.9	819.4	491.1	328.3
1981	104.2	26.1	280.7	241.8	141.6	794.4	387.1	407.3
1982	129.2	33.4	305.1	213.2	105.5	786.4	453.1	333.3
1983	107.7	29.7	277.6	186.6	118.5	720.1	418.5	301.6
1984	156.9	46.9	309.7	108.9	85.7	708.1	529.8	178.3
1985	156.9	59.2	295.5	200.0	144.9	856.5	522.5	334.0
1986	91.7	41.9	294.0	229.3	160.4	817.3	429.3	388.0
1987	94.9	15.9	326.6	286.2	198.4	922.0	364.1	557.9
1988	156.7	82.2	317.4	236.5	116.9	909.7	540.0	369.7

(Table 7. continued)

Year	Uvalde ^a	Medina	Bexar ^b	Comal ^c	Hays	Total	Total Wells	Total Springs
1989	156.9	70.5	305.6	147.9	85.6	766.5	542.4	224.1
1990	118.1	69.7	276.8	171.3	94.1	730.0	489.4	240.6
1991	76.6	25.6	315.5	221.9	151.0	790.6	436.0	354.6
1992	76.5	9.3	370.5	412.4	261.3	1130.0	327.2	802.8
1993	107.5	17.8	371.0	349.5	151.0	996.7	407.3	589.4
1994	95.5	41.1	297.7	269.8	110.6	814.8	424.6	390.2
1995	90.8	35.2	272.1	235.0	127.8	761.0	399.6	361.3
1996	117.6	66.3	286.8	150.2	84.7	705.6	493.6	212.0
1997	77.0	31.4	260.2	243.3	149.2	761.1	377.1	383.9
1998	113.1	51.3	312.4	271.8	168.8	917.6	453.5	464.1
1999	104.0	49.2	307.1	295.5	143.0	898.8	442.7	456.1
2000	89.1	45.1	283.6	226.1	108.4	752.3	414.8	337.5
2001	68.6	33.9	291.6	327.7	175.4	890.0	367.7	529.6
2002	76.2	40.6	311.9	350.4	202.1	981.2	371.3	609.9
2003	89.4	34.8	331.7	344.7	176.3	976.9	362.1	621.5
2004	91.3	22.5	331.9	341.4	153.1	940.3	317.4	622.9
2005	107.4	37.3	366.1	349.3	175.6	1035.7	388.5	647.1
2006	107.5	64.9	289.5	216.7	87.9	766.5	454.5	312.0
2007	64.6	18.4	330.2	331.7	196.0	940.9	319.9	621.0
2008	102.0	48.8	320.4	266.6	108.0	845.7	428.6	417.1
2009	76.9	47.3	265.2	206.6	87.8	683.7	395.7	287.9
2010	53.1	36.4	298.5	312.1	162.5	862.6	372.6	490.0
2011	79.6	57.4	277.2	187.7	91.0	692.9	427.7	265.2
2012	57.6	44.3	267.5	193.4	124.2	687.0	384.7	302.3
2013	43.6	42.8	251.0	13.5	4.9	588.6	355.8	232.8
2014	41.5	43.1	230.5	114.5	97.9	527.5	332.2	195.4
For period of record 1934–2014:								
Median	76.2	17.8	253.2	231.8	116.9	687.0	329.4	375.8
Mean	72.1	23.6	248.4	226.2	121.0	694.1	315.3	379.0
For period of record 2003–2014 (last ten years):								
Median	70.8	43.7	283.4	211.7	103.0	729.7	386.6	307.2
Mean	73.4	44.1	289.6	219.2	113.6	763.1	386.0	377.1

Data source: USGS and Edwards Aquifer Authority files (2014).

a = As of 2008, no longer includes Kinney County discharge; prior years include 1,900 acre-feet of discharge for Kinney County.

b = Includes reports of Edwards Aquifer irrigators in Atascosa County.

c = Includes reports of Edwards Aquifer industrial and municipal users in Guadalupe County.

Differences in totals may occur as a result of rounding.

**Table 8. Estimated Spring Discharge from Edwards Aquifer, 2014
(measured in acre-feet).**

Month	Leona Springs and Leona River Underflow	San Pedro Springs	San Antonio Springs	Comal Springs	Hueco Springs	San Marcos Springs	Total Monthly Discharge from Springs
January	78	8	0	10,390	926	9,980	21,300
February	50	3	0	9,370	447	8,340	18,160
March	5	0	0	9,490	351	8,510	18,350
April	0	0	0	8,600	340	7,390	16,330
May	0	13	0	7,830	1,070	7,310	16,210
June	0	27	0	8,410	1,820	9,140	19,370
July	0	0	0	7,280	1,230	8,400	16,910
August	0	0	0	5,120	210	7,030	12,360
September	0	0	0	4,400	252	6,370	11,020
October	0	0	0	5,460	370	6,540	12,370
November	0	0	0	7,460	2,200	6,510	16,170
December	0	0	0	8,300	1,230	7,300	16,830
Total	0	0	0	92,120	10,450	92,820	195,390

Data source: USGS unpublished report (2014).

Totals might not equal sum of discharge values as a result of rounding.

Figure 10. Annual vs. Period of Record Mean Springflow, San Marcos and Comal Springs

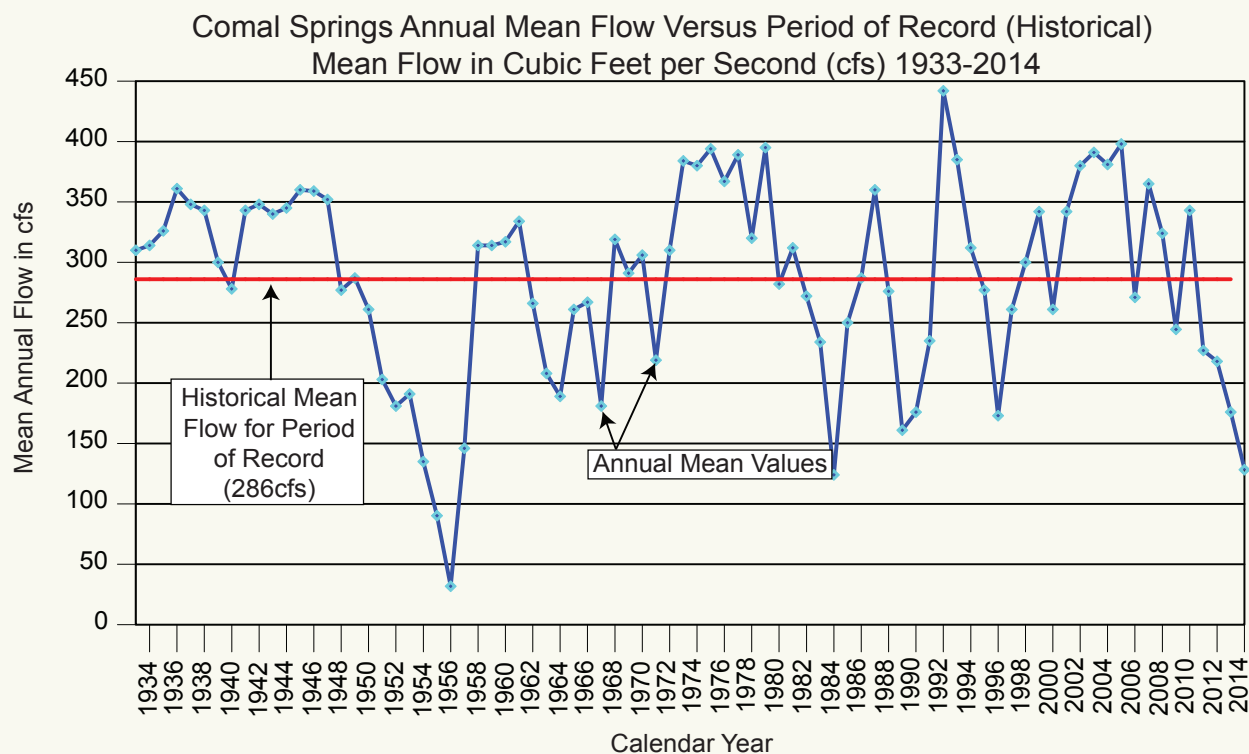
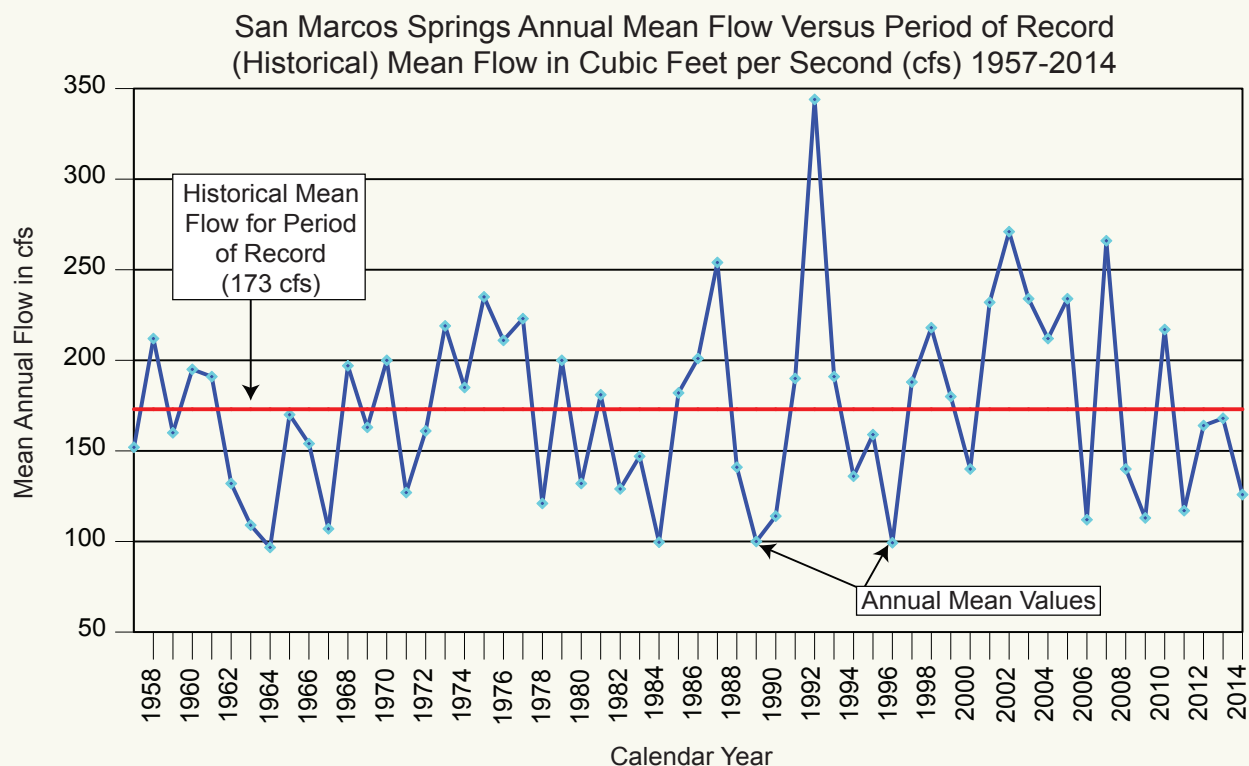


Figure 11. Groundwater Pumping Compared with Springflow from the Edwards Aquifer, 1934–2014 (measured in thousands of acre-feet)

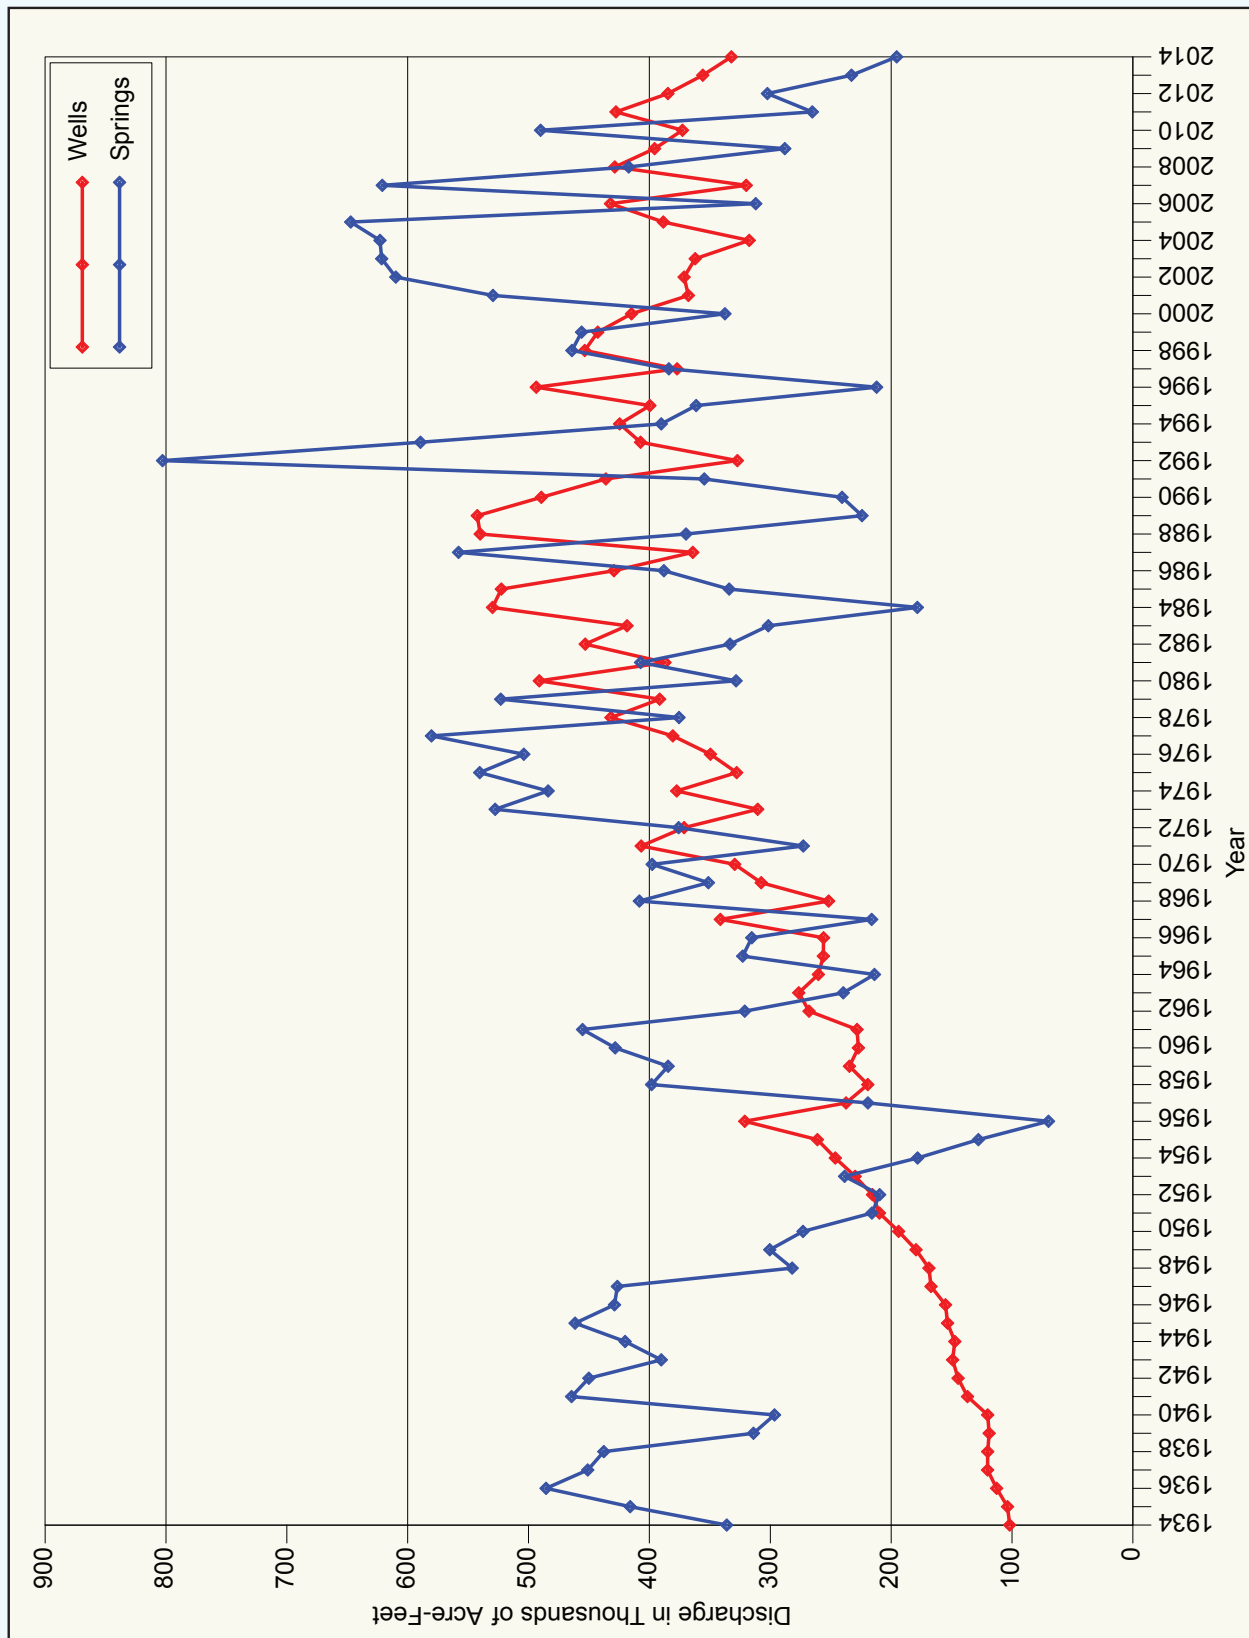
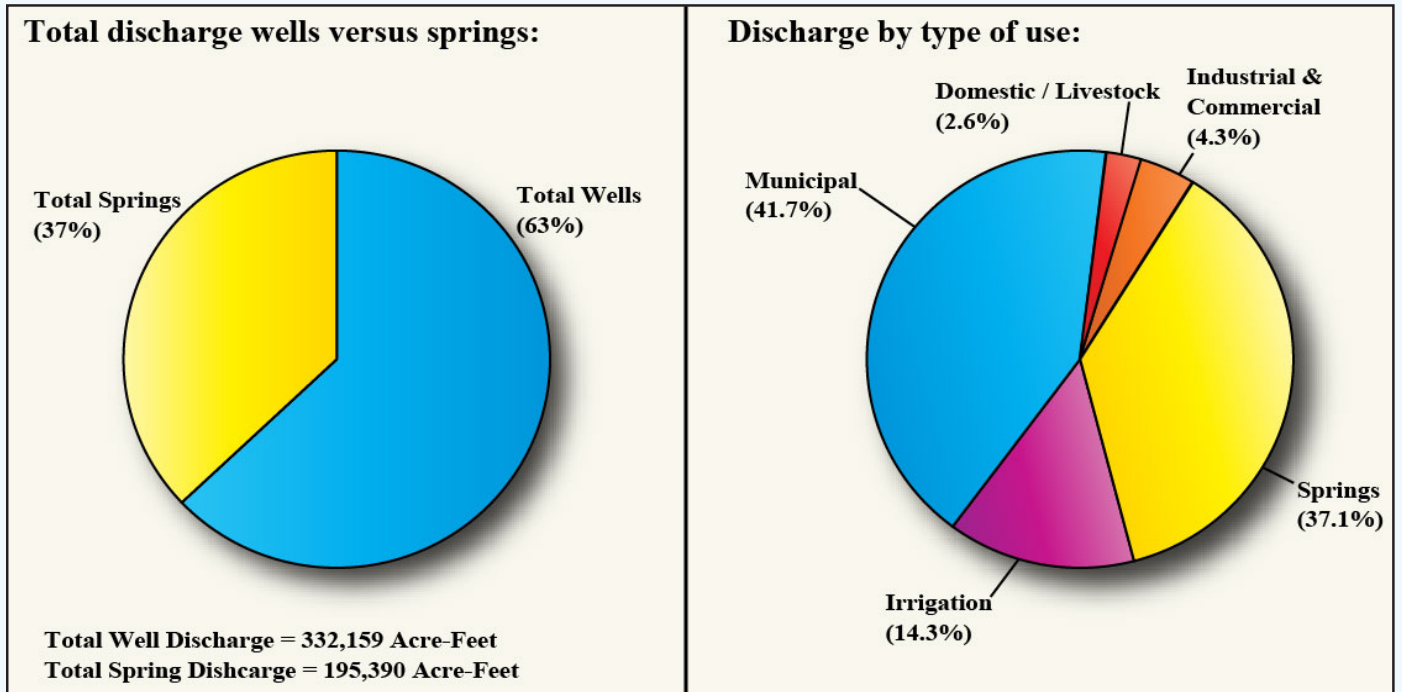


Figure 12. Distribution of Total Discharge from the Edwards Aquifer by Springs and Wells for Calendar Year 2014



**Table 9. Comprehensive Discharge Summary for Calendar Year 2014
(in acre-feet).**

	Reported Use (permitted wells)			Unreported Use				
County	Irrigation	Municipal	Industrial	Domestic or Livestock*	Non-Reporting Facilities*	Total Well Discharge	Spring Discharge	Total Wells and Springs
Atascosa	1,191	0	0	0	0	1,191	0	1,191
Bexar	4,743	196,735	13,848	8,900	5,089	229,524	0	229,524
Comal	63	5,758	5,496	391	0	11,708	102,570	114,278
Guadalupe	0	6	221	0	0	227	0	227
Hays	199	2,567	1,224	873	228	5,091	92,820	97,911
Medina	34,035	6,048	1,948	1,112	0	43,143	0	43,143
Uvalde	35,057	3,700	109	2,618	0	41,484	0	41,484
Totals	75,288	214,814	22,846	13,894	5,317	332,159	195,390	527,549

* Federal facilities, domestic and livestock wells do not report annual use (non-reporting); quantities estimated.
Differences in totals may occur as a result of rounding.

Table 10. Annual Estimated Edwards Aquifer Groundwater Discharge by Use, 1955–2014 (measured in thousands of acre-feet).

Year	Irrigation	Municipal	Domestic/ Stock	Industrial/ Commercial	Springs
1955	85.2	120.5	30.1	25.1	127.8
1956	127.2	138.3	28.9	22.4	69.8
1957	68.8	116.1	29.8	22.6	219.2
1958	47.2	113.7	33.4	25.1	398.2
1959	60.0	118.9	31.5	24.2	384.5
1960	54.9	121.1	29.1	23.3	428.3
1961	52.1	124.5	29.6	22.2	455.3
1962	72.7	143.7	28.8	22.8	321.1
1963	75.4	151.8	27.8	21.8	239.6
1964	72.6	140.2	26.3	21.7	213.8
1965	68.0	138.8	27.0	22.3	322.8
1966	68.2	141.8	23.3	22.6	315.3
1967	119.4	171.0	25.1	25.8	216.1
1968	59.3	146.9	25.5	20.0	408.3
1969	95.2	162.0	29.2	21.1	351.2
1970	110.1	167.5	29.3	22.5	397.7
1971	159.4	196.2	28.6	22.6	272.7
1972	128.8	190.5	30.8	21.1	375.8
1973	82.2	177.1	32.3	18.8	527.6
1974	140.4	174.6	33.5	15.1	483.3
1975	96.4	182.5	33.6	15.3	540.4
1976	118.2	182.1	34.6	14.7	503.9
1977	124.2	205.3	38.1	13.0	580.3
1978	165.8	214.2	40.3	11.5	375.5
1979	126.8	208.9	40.7	15.2	523.0
1980	177.9	256.2	43.3	13.7	328.3
1981	101.8	231.8	40.9	12.6	407.3
1982	130.0	268.6	39.5	15.0	333.3
1983	115.9	249.2	38.8	14.7	301.5
1984	191.2	287.2	36.2	15.2	178.3
1985	203.1	263.7	39.2	16.5	334.0
1986	104.2	266.3	42.0	16.8	388.0
1987	40.9	260.9	43.5	18.7	557.9
1988	193.1	286.2	41.9	18.8	369.7
1989	196.2	285.2	38.2	22.9	224.1
1990	172.9	254.9	37.9	23.7	240.6
1991	88.5	240.5	39.5	67.5	354.6
1992	27.1	236.5	34.8	29.0	802.8
1993	69.3	252.0	49.9	36.1	589.4
1994	104.5	247.0	33.9	39.3	390.2
1995	95.6	255.0	11.6	37.3	361.3
1996	181.3	261.3	12.3	38.8	212.0
1997	77.4 ^{a, b}	253.0	12.3	34.4	383.9
1998	131.9 ^a	266.5	13.4	41.7 ^b	464.1
1999	113.6	273.3	13.4	42.4	456.1
2000	106.3	261.3	13.4	33.8	337.5
2001	79.0	245.9	13.4	29.4	529.4
2002	97.1	228.4	13.6	32.3	609.9
2003	79.6	237.2	13.7	31.7	621.5
2004	55.4	220.3	13.8	28.1	622.9
2005	85.3	255.1	13.8	34.3	647.1
2006	149.1	259.1	13.8	34.5	312.0
2007	42.5	236.0	13.8	27.6	620.6
2008	112.7	273.6	13.5**	28.8	417.1
2009	108.9	247.5	13.6**	25.7	288.0
2010	72.7	259.9	13.6**	26.4	490.0
2011	124.9	265.5	13.6**	23.6	265.2
2012	90.6	257.9	13.7**	22.6	302.3
2013	76.3	239.5	13.7	26.3	232.8
2014	75.3	220.1	13.9	22.8	195.4
For period of record 1955–2014:					
Median	96.8	236.3	13.6**	22.8	375.7
Mean	104.2	214.2	13.4**	24.9	387.0
For period of record 2005–2014 (last ten years):					
Median	88.0	256.5	13.7	26.4	307.2
Mean	93.8	251.4	13.7	27.3	377.1

Data source: USGS unpublished report and Edwards Aquifer Authority files (2014).

a = Includes estimates from Atascosa County discharge by Edwards Aquifer users.

b = Includes estimates from Guadalupe County discharge by Edwards Aquifer users.

* = In 1995 the USGS revised the method of calculation

domestic/livestock pumpage, which significantly decreased the estimate for 1995 and 1996.

** = Revision based on number of new wells permitted annually and discontinuation of Kinney County estimates in total.

Differences in totals may occur as a result of rounding.

Table 11. Groundwater Withdrawals Attributed to Permit Holders (Reported Withdrawals) and Type of Use within EAA Jurisdictional Area, 1999–2014 (in acre-feet).

Year	Industrial/ Commercial	Irrigation	Municipal	Total
1999	42,933	109,156	277,101	429,190
2000	33,473	104,970	260,291	398,734
2001	30,307	78,088	250,781	359,176
2002	32,328	96,445	227,362	356,135
2003	31,688	79,015	229,455	340,158
2004	28,072	54,793	212,630	295,495
2005	34,327	84,733	247,344	366,404
2006	34,472	148,480	251,390	434,342
2007	27,575	41,864	228,121	297,559
2008	28,815	112,708	266,655	408,178
2009	25,326	108,886	243,043	377,255
2010	26,187	72,690	255,204	354,081
2011	23,393	124,905	260,332	408,630
2012	22,560	90,557	252,550	365,668
2013	26,270	76,341	234,023	336,634
2014	22,846	75,288	214,814	312,948

Data source: Unpublished Edwards Aquifer Authority files (2014).

(continued from p. 28)

for all new wells drilled in the Edwards Aquifer. Well-construction permitting data were used to develop updated estimates for the domestic/livestock use category in Tables 7, 9, 10, and 12. On the basis of the permitted installation of 114 domestic/livestock wells in 2014, domestic/livestock use was increased by approximately 72.0 acre-feet for 2014. The estimated mean per-well domestic/livestock usage of 564 gallons per well per day is based on the methodology outlined in William F. Guyton Associates (1992). New domestic/livestock wells, by county, installed in calendar year 2014 are:

- Uvalde: 42 wells
- Medina: 36 wells
- Bexar: 11 wells
- Comal: one well
- Hays: 24 wells
- Atascosa, Caldwell, and Guadalupe: none

Reported withdrawal estimates, which are based on metered use throughout the region, provide the most

accurate estimates of well discharge. Unreported discharge estimates are generally less accurate than reported discharge because domestic and livestock numbers are not based on metered use. Prior to 1999, well-discharge estimates were provided to the EAA by the USGS as estimates that were based on various methodologies representing the best available technology at the time. However, in 1998 the EAA adopted rules requiring all irrigation, industrial, and municipal wells to be metered, which improved estimates of well discharge from 1999 forward. Tables 11 and 12 show reported withdrawals (actual metered discharge from wells) within the jurisdictional area of the EAA. Table 11 summarizes actual reported groundwater withdrawal totals by year and type of use. Table 12 summarizes actual reported groundwater withdrawals by county and type of use, as well as estimated domestic use and measured springflows for calendar years 1999 through 2014.

**Table 12. Groundwater Discharge Attributed to Permit Holders
(Reported Withdrawals) by Type of Use, Domestic Use, and Springflow
within EAA Jurisdictional Area by County, 1999–2014 (reported in acre-feet).**

Uvalde County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring- flow
1999	2,300	2,046	58,857	7,106	70,309	33,100
2000	2,300	1,636	57,910	7,137	68,983	19,100
2001	2,300	921	43,160	4,790	51,171	51,200
2002	2,333	624	54,855	4,361	62,173	12,200
2003	2,369	488	44,765	4,023	51,645	35,900
2004	2,386	218	34,364	3,834	40,802	48,700
2005	2,400	940	46,428	4,248	54,016	51,570
2006	2,346	307	79,076	5,250	86,979	20,480
2007	2,411	198	26,090	3,728	32,427	30,290
2008	2,422	126	63,715	4,768	71,031	30,937
2009	2,430	107	58,814	4,797	66,148	10,530
2010	2,442	119	38,118	3,975	44,654	8,249
2011	2,457	151	68,171	4,862	75,641	3,949
2012	2,487	143	49,163	4,356	56,149	1,498
2013	2,510	95	36,959	4,080	43,643	133
2014	2,618	109	35,057	3,700	41,484	0

Medina County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring- flow
1999	900	1,354	39,004	7,727	48,985	na
2000	900	839	36,759	6,564	45,062	na
2001	900	768	26,407	6,433	34,508	na
2002	925	1,050	33,112	5,497	40,584	na
2003	947	727	27,217	5,922	34,813	na
2004	971	731	15,148	5,738	22,588	na
2005	985	1,295	29,066	5,957	37,303	na
2006	1,002	1,421	55,372	7,089	64,884	na
2007	1,017	550	11,180	5,651	18,398	na
2008	1,033	1,327	40,185	6,290	48,835	na
2009	1,046	1,456	38,348	6,409	47,259	na
2010	1,052	1,210	28,478	5,860	36,600	na
2011	1,063	1,978	47,608	6,740	57,389	na
2012	1,072	2,018	35,137	6,104	44,331	na
2013	1,089	2,007	33,755	5,911	42,762	NA
2014	1,112	1,948	34,035	6,048	43,143	NA

Bexar County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring- flow
1999	8,800	25,464	9,421	241,437	285,122	17,400
2000	8,800	21,849	8,903	233,983	273,535	3,400
2001	8,814	20,192	7,229	227,370	263,605	29,400
2002	9,000	20,084	7,633	205,897	242,614	68,600
2003	8,833	19,692	6,157	209,972	244,654	86,200
2004	8,849	18,608	4,849	195,462	227,768	97,000
2005	8,855	23,418	7,942	227,544	267,759	90,270
2006	8,861	24,654	11,716	228,757	273,988	6,650
2007	8,870	19,330	3,902	211,083	243,185	79,600
2008	8,875	19,231	7,265	244,622	279,993	32,292
2009	8,879	16,766	10,233	221,633	257,511	2,045
2010	8,883	17,882*	5,107	236,185	268,057*	25,028
2011	8,885	15,269	7,436	237,620	269,210	1,624
2012	8,889	14,165	4,703	237,954	265,711	516
2013	8,893	15,648	4,179	221,097	249,817	51
2014	8,900	13,848	4,743	201,824	229,315	0

Comal County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring- flow
1999	300	12,242	129	10,511	23,182	275,300
2000	300	7,514	137	7,733	15,684	213,400
2001	300	6,556	44	7,289	14,189	316,700
2002	315	8,533	55	8,093	16,996	333,200
2003	325	9,549	92	4,174	14,140	330,400
2004	339	7,421	41	3,658	11,459	329,800
2005	347	7,528	57	5,275	13,207	335,910
2006	356	6,925	53	5,362	12,696	203,990
2007	363	6,281	15	4,092	10,751	320,643

(Table 12. continued)

(Comal County continued)

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring-flow
2008	369	6,563	61	6,463	13,456	252,766
2009	375	5,409	65	6,620	12,469	193,740
2010	378	5,486*	33	5,782	11,679*	300,060
2011	383	4,296	72	7,880	12,631	174,684
2012	387	4,849	78	6,235	11,549	181,704
2013	390	7,061	63	5,781	13,295	141,412
2014	391	5,496	63	5,758	11,708	102,570

Hays County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring-flow
1999	800	1,646	19	10,320	11,985	130,300
2000	800	1,447	57	4,874	6,378	101,600
2001	800	1,650	77	4,899	6,626	167,900
2002	814	1,851	61	3,479	5,391	195,900
2003	825	1,050	107	5,324	6,481	169,000
2004	830	910	54	3,900	4,864	147,400
2005	833	928	120	4,320	5,368	169,400
2006	837	1,123	123	4,932	6,186	80,910
2007	841	1,066	139	3,413	4,618	190,510
2008	843	1,332	314	4,380	6,026	105,152
2009	845	1,378	275	3,423	5,921	81,660
2010	850	1,293	244	3,252	5,639	156,680
2011	854	1,482	384	3,097	5,817	84,960
2012	856	1,357	215	3,115	5,543	118,630
2013	858	1,292	177	2,535	4,862	91,210
2014	873	1,224	199	2,795	5,091	92,820

Guadalupe County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring-flow
1999	NA	181	0	0	181	0
2000	NA	188	0	0	188	0
2001	NA	220	0	0	220	0
2002	NA	186	0	35	221	0
2003	NA	182	0	40	222	0
2004	NA	184	0	38	222	0
2005	NA	218	0	0	218	0
2006	NA	42	6	0	48	0
2007	NA	151	1	153	305	0
2008	NA	236	3	132	371	0
2009	NA	210	1	161	372	0
2010	NA	197	1	150	348	0
2011	NA	216	1	132	349	0
2012	NA	28	1	114	143	0
2013	NA	167	0	69	236	0
2014	NA	221	0	6	227	NA

Atascosa County

Year	Domestic Stock Use	Industrial/ Commercial	Irrigation	Municipal	Total Well Use	Spring-flow
1999	NA	0	1,726	0	1,726	0
2000	NA	0	1,204	0	1,204	0
2001	NA	0	1,171	0	1,171	0
2002	NA	0	729	0	729	0
2003	NA	0	677	0	677	0
2004	NA	0	337	0	337	0
2005	NA	0	1,120	0	1,120	0
2006	NA	0	2,125	0	2,125	0
2007	NA	0	537	0	537	0
2008	NA	0	1,165	0	1,165	0
2009	NA	0	1,150	0	1,150	0
2010	NA	0	709	0	709	0
2011	NA	0	1,233	0	1,233	0
2012	NA	0	1,259	0	1,259	0
2013	NA	0	1,208	0	1,208	0
2014	NA	0	1,191	0	1,191	NA

Data source: Unpublished Edwards Aquifer Authority files (2014).

na = Not applicable or no information.

Domestic/Stock Use estimates incorporate new wells on the basis of drilling permits beginning in 2002, discharge quantity adjusted yearly afterward. Total Well Use includes only categories of well use listed in table (Domestic/Stock, Municipal, Industrial, and Irrigation).

WATER QUALITY

The EAA and its predecessor agency, the EUWD, in cooperation with the USGS and TWDB, have conducted a program of water quality data collection since 1968. Analyses of these data have been used by the EAA to assess aquifer water quality.

Each year the EAA monitors the quality of water in the aquifer by sampling wells, springs, and streams across the region. Wells consist of municipal, irrigation, monitoring, and a few private wells. Five major spring groups are sampled annually on a quarterly or more frequent basis, depending on springflows: San Antonio, San Pedro, Hueco, Comal, and San Marcos springs. The EAA occasionally collects additional samples from other springs in the region. For example, in 2014, the EAA also collected a sample from Las Moras (Fort Clark) Springs in Kinney County. Analyses of stream samples enable the EAA to assess water quality before the water enters the aquifer.

Because of the large areal extent of the aquifer, large number of wells, and distance between wells, the annual data set provides only limited resolution with regard to aquiferwide conditions. Therefore, the sampling program provides a representative “snapshot” of water quality conditions relative to the location, time, and date the sample was collected. As such, some sample locations are sampled at a greater frequency than in the past so that resolution of the water quality data set might improve over time. In 2014, the EAA sampled 61 wells, four spring groups, and 14 streams. Many of the wells, springs, and surface waters were sampled multiple times so that temporal changes in water quality might be evaluated at select locations. The EAA water quality program includes testing for a variety of different types of compounds. Whereas not all sample points were tested for each of the analyses listed below, cumulative results of the annual testing program are intended to be representative of general water quality across the region. Analytical testing for the following compounds was performed: bacteria, nutrients, volatile organic compounds (VOCs), semivolatile organic compounds (SVOCs), metals, pesticides, herbicides, and polychlorinated biphenyls

(PCBs), as well as analyses for pharmaceuticals and personal care products (PPCPs) at a limited number of locations.

Although most sample results did not indicate anthropogenic impacts at the sample point, some compounds of concern were detected at what are considered low levels at various locations. In wells, the compounds detected with the highest frequency were VOCs and SVOCs. None of the VOC detections was at a concentration in excess of a regulatory standard. SVOC detections that are not suspected of being post-collection contaminants were also detected at concentrations far below regulatory standards. Well samples collected for herbicide and pesticide analyses resulted in four detections, again below their regulatory standards. Nitrate sampling in wells resulted in six wells testing positive for elevated nitrates (above five milligrams per liter as nitrogen, or mg/L-N). The regulatory standard for nitrate as N is 10 mg/L-N. No metal concentrations were detected above their regulatory standards in wells sampled across the region.

Samples collected at springs contained some detections of VOCs, SVOCs, herbicides, pesticides, and a few metals. Spring samples analyzed for VOCs detected two compounds that were probably laboratory contaminants. Of the 71 spring samples collected for SVOC analyses, 35 detections were noted; however, all of these detections were for phthalate compounds—most, if not all of which were probable post-collection contaminants. No PCB compounds were detected in the 71 spring samples. Herbicide and pesticide compounds were detected in six of the 71 samples collected at springs. All compounds were reported at extremely low levels, and none of the herbicide and pesticide detections exceeded regulatory standards. The metal thallium was detected above the regulatory standard in two of the 71 samples collected at springs during 2014.

Samples collected at surface water sites across the region are generally not tested for VOC compounds because of the low probability of these compounds being detected in normal surface water. Two surface

water samples were analyzed for VOCs, and none was detected. Samples were collected for SVOCs in all 14 surface water sample locations, resulting in seven detections, although they are considered tentative. No PCBs were detected in surface water analyses. Two herbicide or pesticide compounds (dicamba and 2,4-D) were detected in the surface water analyses.

PPCP sampling performed in 2014 provided additional insight into the presence of these compounds in groundwater, surface water, or springflow. At the 11 sample sites tested for PPCPs in 2014, 34 compounds were detected. Unlike other analyses discussed herein, PPCP compounds are analyzed at the nanogram per liter (ng/L) level (parts per trillion). Consequently, all detections were at extremely low levels. The types of compounds detected were generally trace concentrations of antibiotics, estrogen compounds, caffeine, nicotine metabolites, and other medications.

Water quality sample locations are shown in Figures 13a–e. Spring and stream samples are discussed in detail in the following section.

Sample-Collection Summary Calendar Year 2014

Bacteria Samples

- 74 samples collected at 59 wells
- 70 samples collected at four spring groups
- 24 samples collected from 12 streams

Metals Samples

- 72 samples collected at 59 wells
- 71 samples collected at four spring groups
- 21 samples collected from 12 streams

Nitrate-Nitrite as Nitrogen

- 87 samples collected at 59 wells
- 71 samples collected at four spring groups
- 21 samples collected from 12 streams

Volatile Organic Compounds

- 69 samples collected at 56 wells
- 70 samples collected at four spring groups
- Four samples collected from two streams

Semivolatile Organic Compounds

- 59 samples collected at 48 wells
- 71 samples collected at four spring groups
- 16 samples collected from 12 streams

Pesticide and/or Herbicide Compounds

- 51 samples collected at 43 wells
- 71 samples collected at four spring groups
- 15 samples collected from 12 streams

Polychlorinated Bi-Phenyls

- 32 samples collected at 27 wells
- 72 samples collected at four spring groups
- 16 samples collected from nine streams

Pharmaceuticals and Personal Care Products

- Three samples collected at three wells
- Four samples collected at four spring groups
- Five samples collected from four streams

For water quality samples, a general listing of the parameters analyzed, their drinking-water standards, and typical concentrations in the Edwards Aquifer are listed in Table 13. Routine water quality data collected from wells in 2014 are listed in Appendix C, Tables C-1 through C-7. Routine water quality data collected from streams and springs in 2014 are listed in Appendix C, Tables C-8 through C-14. Results for PPCP compounds for wells, springs, and surface water are listed in Table C-15. These tables are no longer printed for this report but can be viewed and downloaded from the EAA's Scientific Reports Document Library at <http://www.edwardsaquifer.org/scientific-research-and-reports/scientific-reports-document-library> under the title "Appendix C of Edwards Aquifer Authority Hydrologic Data Report for 2014." As applicable, analytical results discussed herein are compared with water quality standards to determine whether any concentrations exceed health-based levels. For samples taken from locations such as private or municipal wells, a copy of analytical results for the location was forwarded to the owner or appropriate entity as a courtesy for allowing the EAA access to these locations.

**Table 13. Comparison of Drinking-Water Quality Standards with
Range of Concentrations from Water Quality Results, 2014.**

Parameter and Method	Maximum Contaminant Levels or Secondary Standards	Range of Concentrations Detected in 2014	Typical Range of Concentrations for the Freshwater Edwards Aquifer
Field			
Temperature (°C) EPA 170.1	NE	11.84–32.05	20–23
pH measured at 25 °C EPA 150.1	>7.0*	6.49–8.28	6.5–8.0
Turbidity (NTU)	NE	0–501	0.05–2
Dissolved oxygen (DO) (mg/L)	NE	0.17–10.97	2–4
Alkalinity total as CaCO ₃ SM 2320 B (mg/L)	NE	62–369	200–400
Specific conductance uS/cm	NE	390–984	500–600
Laboratory			
Alkalinity total as CaCO ₃ SM 2320 B	NE	61.6–388	200–400
Bicarbonate (HCO ₃) SM 2320 B	NE	61.6–388	200–400
Carbonate (CO ₃) SM 2320B	NE	ND	ND
E. Coli (MPN/100 mL)	0 MCLG ¹	<1–71	0–3
pH measured at 25 °C EPA 150.1	>7.0*	6.25–8.91	6.5–8.0
Specific conductance uS/cm	NE	412–929	500–600
Nutrients (mg/L)			
Nitrate as N E300	10	ND–7.17	ND–2.5
Ammonia as N SM 4500	NE	ND	ND
Phosphorus	NE	ND–0.0929	ND
Phosphorus	NE	ND–1.71	ND
Major Ions (mg/L)			
Sulfate (SO ₄) EPA 300.0	300*	3.62–75.4	30–60
Solids total dissolved (TDS) EPA 160.1	1,000*	118–556	200–400
Solids total suspended (TSS) EPA 160.2	NE	ND–45.6	ND–2
Bromide (Br) EPA 300.0	NE	ND–1.65	ND–0.2
Chloride (Cl) EPA 300.0	300*	7.95–113	15–50
Fluoride (F) EPA 340.2	2.0*	0.0793–1.61	0.02–0.4
Metals by EPA 200.7 and 200.8 (µg/L)			
Aluminum	24,000**	ND–247	ND–40
Antimony	6.0	ND	ND–1
Arsenic	10.0	ND	ND–1
Barium	2,000	22.9–164	10–100
Beryllium	4.0	ND	ND–1
Boron	4,900**	ND–64.6	ND–60
Cadmium	5.0	ND	ND–0.6
Chromium	100	ND–8.98	ND–3
Cobalt	7.3**	ND	ND–1
Copper	1,000**	ND–5.58	ND–4
Iron	300*	ND–108	ND–6
Lead	15.0	ND–4.51	ND–3
Lithium	49.0**	2.05–10.1	ND–5
Manganese	50.0*	ND–20	ND–4
Molybdenum	120**	ND–36	ND–10
Nickel	490**	ND–22.6	ND–3
Selenium	50.0	ND–16.7	ND–30
Silver	100*	ND	ND–0.001
Strontium	15,000**	895–7250	200–500
Thallium	2.0	ND–0.716	ND–1
Uranium	30.0	ND–2.94	ND
Vanadium	44.0**	3.06–12.5	ND–4
Zinc	5,000*	ND–832	ND–20
Metals by E200.8 (mg/L)			
Calcium	NE	11.2–148	0.05–0.10
Magnesium	NE	2.58–30.6	ND–0.004
Potassium	NE	0.599–5.1	5–15
Sodium	NE	4.64–52.8	0.005–0.015
Metals by SW-7470A (mg/L)			
Mercury	0.002	ND	ND–0.0001
Total Organic Carbon by E415.1 (mg/L)			
TOC	NE	ND–6.62	ND
Herbicides by SW-8141 (µg/L)			
Azinphosmethyl	37.0**	ND	ND
Bolstar (Sulprofos)	73.0**	ND	ND
Chlorpyrifos	73.0**	ND	ND

(Table 13. continued)

Parameter and Method	Maximum Contaminant Levels or Secondary Standards	Range of Concentrations Detected in 2014	Typical Range of Concentrations for the Freshwater Edwards Aquifer
Coumaphos	170**	ND	ND
Demeton-O	0.98**	ND	ND
Demeton-S	22.0**	ND	ND
Diazinon	3.1**	ND	ND
Dichlorvos	4.9**	ND	ND
Dimethoate	0.98**	ND	ND
Disulfoton	0.24**	ND	ND
EPN	2.4**	ND-0.0745	ND
Ethoprop	0.73**	ND	ND
Famphur	24.0**	ND	ND
Fensulfothion	1.7**	ND	ND
Fenthion	490**	ND	ND
Malathion	0.73**	ND	ND
Merphos	6.1**	ND	ND
Methyl parathion	0.61**	ND	ND
Mevinphos (Phosdrin)	15.0**	ND	ND
Monocrotophos	49.0**	ND	ND
Naled	150**	ND	ND
Parathion	4.9**	ND	ND
Phorate	1,200**	ND	ND
Ronnel	1000**	ND	ND
Stirophos (Tetrachlorvinphos)	12.0**	ND	ND
Sulfotepp (Tetraethyl dithiopyrophosphate)	2.4**	ND	ND
Tokuthion (Prothiofos)	73.0**	ND	ND
Trichloronate	1.7**	ND	ND
Thionazin	1.7**	ND	ND
Herbicides by SW-8151 (µg/L)			
2,4,5-T	240**	ND	ND
2,4,5-TP (Silvex)	50.0	ND	ND
2,4- D	70.0	ND-0.0754	ND
2,4-DB	200**	ND	ND
Dalapon	200	ND-0.371	ND
Dicamba	730**	ND	ND
Dichloroprop	240**	ND	ND
Dinoseb	7.0	ND	ND
MCPA	12.0**	ND	ND
MCPP (mecoprop)	24.0**	ND	ND
Pentachlorophenol	1.0	ND	ND
Pesticides by SW-8081 (µg/L)			
4, 4'-DDD	3.8**	ND	ND
4, 4'-DDE	2.7**	ND-0.00212	ND
4, 4'-DDT	2.7**	ND	ND
Aldrin	0.05**	ND-0.0151	ND
Alpha-bhc (Alpha-hexachlorocyclohexane)	0.1**	ND-0.0033	ND
Alpha-chlordane	2.6**	ND	ND
Beta-bhc (Beta-hexachlorocyclohexane)	0.5**	ND	ND
Chlordane	2.0**	ND	ND
Chlorobenzilate	NE	ND	ND
Delta-bhc (Delta-hexachlorocyclohexane)	0.5**	ND-0.00329	ND
Dieldrin	0.57**	ND	ND
Endosulfan I	49**	ND	ND
Endosulfan II	150**	ND	ND
Endosulfan sulfate	150**	ND	ND
Endrin	2.0**	ND	ND
Endrin aldehyde	7.3**	ND	ND
Endrin ketone	7.3**	ND	ND
Gamma-bhc (Lindane)	0.2	ND-0.00219	ND
Gamma-chlordane	2.6**	ND	ND
Heptachlor	0.4	ND	ND
Heptachlor epoxide	0.2	ND	ND
Methoxychlor	40.0	ND	ND
Toxaphene	3.0	ND	ND
PCBs by SW-8082 (µg/L)			
Aroclor 1016	0.5	ND	ND
Aroclor 1221	0.5	ND	ND
Aroclor 1232	0.5	ND	ND
Aroclor 1242	0.5	ND	ND
Aroclor 1248	0.5	ND	ND
Aroclor 1254	0.5	ND	ND

(Table 13. continued)

Parameter and Method	Maximum Contaminant Levels or Secondary Standards	Range of Concentrations Detected in 2014	Typical Range of Concentrations for the Freshwater Edwards Aquifer
Aroclor 1260	0.5	ND	ND
Aroclor 1262	0.5	ND	ND
Aroclor 1268	0.5	ND	ND
SVOCs by SW-8270C (µg/L)			
1,2- dichlorobenzene	600	ND	ND
1,2,4- trichlorobenzene	70.0	ND	ND
1,3- diclorobenzene	730**	ND	ND
1,3- dimethylnaphthalene	980**	ND-0.0652	ND
1,4- dichlorobenzene	75.0	ND	ND
1- methylnaphthalene	31.0**	ND	ND
2, 4, 5-trichlorophenol	2,400**	ND	ND
2, 4, 6-trichlorophenol	24.0**	ND	ND
2, 4-dichlorophenol	73.0**	ND	ND
2, 4-dimethylphenol	490**	ND	ND
2, 4-dinitrophenol	49.0**	ND	ND
2-chlorophenol	120**	ND	ND
2-methylnaphthalene	98.0**	ND	ND
2-methylphenol (o-cresol)	1,200**	ND	ND
2-nitroaniline	7.3**	ND	ND
2-nitrophenol	49.0**	ND	ND
3 & 4 methylphenol (m&p cresol)	1200**	ND	ND
3-nitroaniline	120**	ND	ND
4, 6-dinitro-2-methylphenol	7.3**	ND	ND
4-chloro-3-methylphenol	2.4**	ND	ND
4- chloroaniline	120**	ND	ND
4-nitroaniline	4.6**	ND	ND
4-nitrophenol	46.0**	ND	ND
Naphthalene	490**	ND	ND
Nitrobenzene	49.0**	ND	ND
Pentachlorophenol	1.0	ND	ND
Phenanthrene	730**	ND	ND
Phenol	7,300**	ND	ND
Pyrene	730**	ND	ND
N-nitrosodi-n-propylamine	0.13**	ND	ND
N-nitrosodiphenylamine	190**	ND	ND
Acenaphthene	1,500**	ND	ND
Acenaphthylene	1,500**	ND	ND
Anthracene	7,300**	ND	ND
Benzo(a)anthracene (1 2-benzanthracene)	1.3**	ND-0.0314	ND
Benzo(b)fluoranthene	1.3**	ND-0.0304	ND
Benzo(k)fluoranthene	13**	ND-0.0324	ND
Benzo(ghi)perylene	730**	ND-0.036	ND
Benzo(a)pyrene	0.2	ND-0.0275	ND
Benzyl Alcohol	2400**	ND-0.0379	ND
Butyl benzyl phthalate	480**	ND	ND
Bis(2-chloroethoxy)methane	0.83**	ND	ND
Bis(2-chloroethyl)ether	0.83**	ND	ND
Bis(2-ethylhexyl)phthalate	6.0	ND	ND
4-bromophenyl phenyl ether	0.061**	ND	ND
4-chloroaniline	4.6**	ND	ND
2-chloronaphthalene	2,000**	ND	ND
4-chlorophenyl phenyl ether	0.061**	ND	ND
Chrysene	130**	ND-0.0322	ND
Dibenz(a,h)anthracene	0.2**	ND-0.0381	ND
Dibenzofuran	98.0**	ND	ND
3 3-dichlorobenzidine	2.0**	ND	ND
Diethyl phthalate	20,000**	ND	ND
Dimethyl phthalate	20,000**	ND	ND
Di-n-butyl phthalate	2,400**	ND	ND
Di-n-octyl phthalate	980**	ND	ND
2 4-dinitrotoluene	1.3**	ND	ND
2 6-dinitrotoluene	1.3**	ND	ND
Fluoranthene	980**	ND	ND
Fluorene	980**	ND	ND
Hexachlorobenzene	1.0**	ND	ND
Hexachlorobutadiene	12.0**	ND	ND
Hexachlorocyclopentadiene	50.0	ND	ND
Hexachloroethane	17.0**	ND	ND
Indeno(1,2,3-cd)pyrene	1.3**	ND	ND
Isophorone	960**	ND	ND

(Table 13. continued)

Parameter and Method	Maximum Contaminant Levels or Secondary Standards	Range of Concentrations Detected in 2014	Typical Range of Concentrations for the Freshwater Edwards Aquifer
VOCs SW-8260b (µg/L)			
1, 1, 1, 2-tetrachloroethane	35.0**	ND	ND
1, 1, 1-trichloroethane	200.0	ND	ND
1, 1, 2, 2-tetrachloroethane	4.6**	ND	ND
1, 1, 2-trichloroethane	5.0	ND	ND
1,1,2- trichlorotrifluoroethane	730,000**	ND	ND
1, 1-dichloroethane	4,900**	ND	ND
1, 1-dichloropropene	9.1**	ND	ND
1, 1-dichloroethene (Vinylidene chloride)	7.0	ND	ND
1- chlorohexane	980**	ND	ND
1-octene	NE	ND	ND
1, 2, 3-trichlorobenzene	73.0**	ND	ND
1, 2, 3-trichloropropane	0.03**	ND	ND
1, 2, 4-trichlorobenzene	70.0**	ND	ND
1, 2, 4-trimethylbenzene	1,200**	ND	ND
1, 2-dibromo-3-chloropropane	0.2	ND	ND
1, 2-dibromoethane (EDB)	.05**	ND	ND
1, 2-dichlorobenzene	600**	ND	ND
1, 2-dichloroethane (EDC)	5.0	ND	ND
1,2- dichloroethane, Total	5.0	ND	ND
1, 2-dichloropropane	1,200**	ND	ND
1, 3, 5-trimethylbenzene	NE	ND	ND
1,3- butadiene	730**	ND	ND
1, 3-dichlorobenzene	9.1**	ND	ND
1, 3-dichloropropane	75.0**	ND	ND
1, 4-dichlorobenzene	9.1**	ND	ND
1, 4-dioxane	13.0**	ND	ND
2, 2-dichloropropane	NE	ND	ND
2-chlorotoluene	490**	ND	ND
2-hexanone	120**	ND	ND
2-nitropropane	3.4**	ND	ND
1,3,5- trichlorobenzene	73**	ND	ND
4-chlorotoluene	490**	ND	ND
4-isopropyltoluene	2,400**	ND	ND
4-methyl-2-pentanone (MIBK)	2,000**	ND	ND
Acetone	22,000**	ND-7.43	ND
Acetonitrile	780**	ND	ND
Allyl Chloride	240**	ND	ND
Benzene	5.0	ND	ND
Benzyl Chloride	5.4**	ND	ND
Bromobenzene	200**	ND	ND
Bromochloromethane (chlorobromomethane)	980**	ND-0.464	ND
Bromodichloromethane	15.0**	ND-0.426	ND
Bromoform (Tribromomethane)	120**	ND-1.31	ND
Bromomethane (Methyl bromide)	34.0**	ND	ND
Carbon disulfide	2,400**	ND	ND
Carbon tetrachloride	5.0	ND	ND
Chlorobenzene	100	ND	ND
Chloroethane (Ethyl chloride)	9,800**	ND	ND
Chloroform	240**	ND-2.33	ND
Chloromethane (Methyl chloride)	70.0**	ND	ND
Chloroprene	70.0	ND	ND
Cis-1, 2-dichloroethene	1.7**	ND	ND
Cis-1, 3-dichloropropene	NE	ND	ND
Cis-1,4- dichloro-2- butene	120,000**	ND	ND
Cyclohexane	120,000**	ND	ND
Cyclohexanone	11.0**	ND-0.803	ND
Dibromochloromethane	120**	ND	ND
Dibromomethane	4,900**	ND	ND
Dichlorodifluoromethane	700**	ND	ND
Ethylbenzene	22,000**	ND-0.409	ND
Ethyl acetate	22,000**	ND	ND
Ethyl ether	4,900**	ND	ND
Ethylene oxide	0.89**	ND	ND
Ethyl methacrylate	2,200**	ND	ND
Hexane	1,500**	ND	ND
Hexachlorobutadiene	12.0**	ND	ND
Iodomethane	34.0**	ND	ND
Isobutyl alcohol	7,300**	ND	ND
Isooctane	NE	ND	ND
Isopropylbenzene (Cumene)	2,400**	ND	ND
Methacrylonitrile	2.4**	ND	ND
Methyl ethyl ketone (2-butanone)	15,000**	ND	ND
Methyl methacrylate	34,000**	ND	ND

(Table 13. continued)

Parameter and Method	Maximum Contaminant Levels or Secondary Standards	Range of Concentrations Detected in 2014	Typical Range of Concentrations for the Freshwater Edwards Aquifer
Methylene chloride (Dichloromethane)	5.0**	ND	ND
Naphthalene	490**	ND	ND
n-Butylbenzene	1,200**	ND	ND
n-Heptane	1,500**	ND	ND
n-Propylbenzene	980**	ND	ND
Pentachloroethane	10.0**	ND	ND
Propionitrile	9.8**	ND	ND
sec-Butylbenzene	980**	ND	ND
Styrene	100	ND	ND
tert-Butylbenzene	980**	ND	ND
Tert-butyl methyl ether (mtbe)	240**	ND	ND
Tetrachloroethene	5.0	ND–4.96	ND
Toluene	1,000	ND–1.68	ND
Trans-1, 2-dichloroethene	100	ND	ND
Trans-1, 3-dichloropropene	9.1**	ND	ND
Trans-1,4- dicloro-2- butene	NE	ND	ND
Trichloroethene	5.0	ND	ND
Trichlorofluoromethane	7,300**	ND	ND
Vinyl Acetate	24,000**	ND	ND
Vinyl chloride (Chloroethene)	2.0	ND	ND
m-p-xylene	10,000**	ND	ND
o-xylene	10,000**	ND	ND

Data source: TCEQ, maximum contaminant levels, 30 TAC, Chapter 290, Subchapter F, and RG-346 Rev. May 2012 (www.sos.state.tx.us/tac/index.shtml).

NE = No established MCL, secondary standard, or PCL.

* = Secondary drinking water standards (30 TAC, 290, Subchapter F).

** = Texas Risk Reduction Program (TRRP) rules, Tier 1, residential PCLs, 30 TAC Chapter 350, updated June 2012 (<http://www.tceq.state.tx.us/remediation/trrp/trrppcls.html>).

1 = MCLG-Maximum contaminant level goal.

MCL = Maximum contaminant level.

ND = Not detectable.

< = Detection limit, and not necessarily the concentration, of the compound in water.

mg/L = Milligram per liter (often referred to as parts per million).

µg/L = Microgram per liter (often referred to as parts per billion).

Primary Drinking-Water Standards—Primary drinking-water standards are enforceable for public water supply systems and are also referred to as maximum contaminant levels (MCLs). The MCL for a contaminant is the maximum permissible level in water that is delivered to any user of a public water system. MCLs protect drinking water quality by limiting levels of specific contaminants that can adversely affect public health and are known or anticipated to occur in public water systems. The primary standards are based on concentrations published in Title 30 of the Texas Administrative Code, Chapter 290, Subchapter F (Table 13). For compounds that do not have an established MCL, the protective concentration level (PCL) is provided, which is based on the Texas Risk Reduction Program (TRRP), Tier 1, residential value, as referenced in Title 30, Texas Administrative Code, Chapter 350. This concentration is the value estimated to be protective of human health and the environment.

Secondary Drinking-Water Standards—Secondary standards are non-enforceable and are set for contaminants that may affect aesthetic qualities of drinking water, such as odor or appearance. Table 14 is a list of current secondary standards. Concentrations of the secondary standards listed in Table 14 are generally not exceeded in the freshwater part of the Edwards Aquifer, although concentrations of TDS, fluoride, chloride, and iron typically exceed secondary standards in samples from the saline-water zone.

Tables 13 and 14 referenced earlier are updated regularly with revisions to MCL or PCL values for various compounds. The reader is encouraged to check the referenced regulations for updates to MCL and PCL values, as well as secondary standards.

Figure 13a. Year 2013 Edwards Aquifer Authority Water Quality Sampling Locations—
Wells, Springs, and Streams Sampled

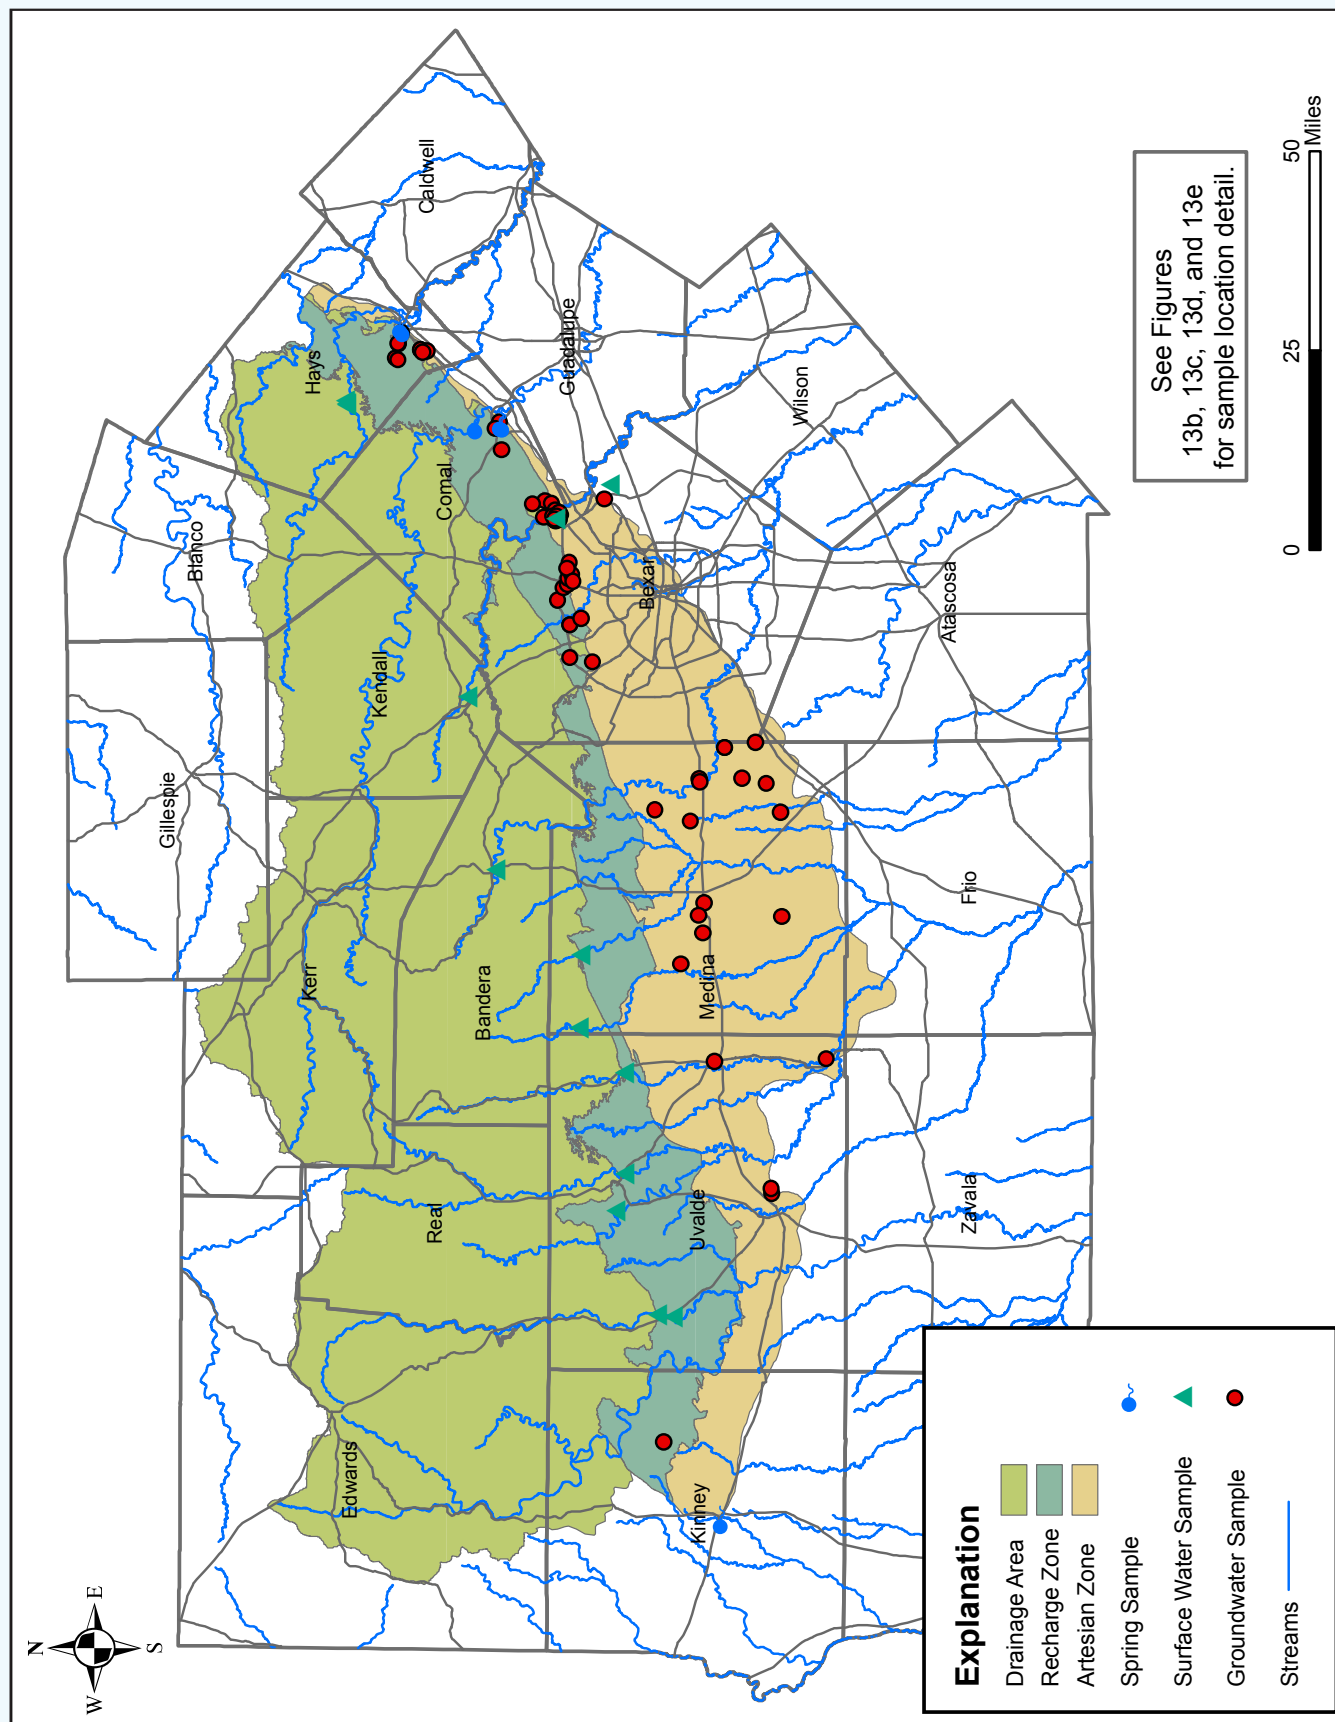


Figure 13b. Year 2013 Edwards Aquifer Authority Water Quality Sampling Locations, Kinney, Uvalde, and Medina Counties


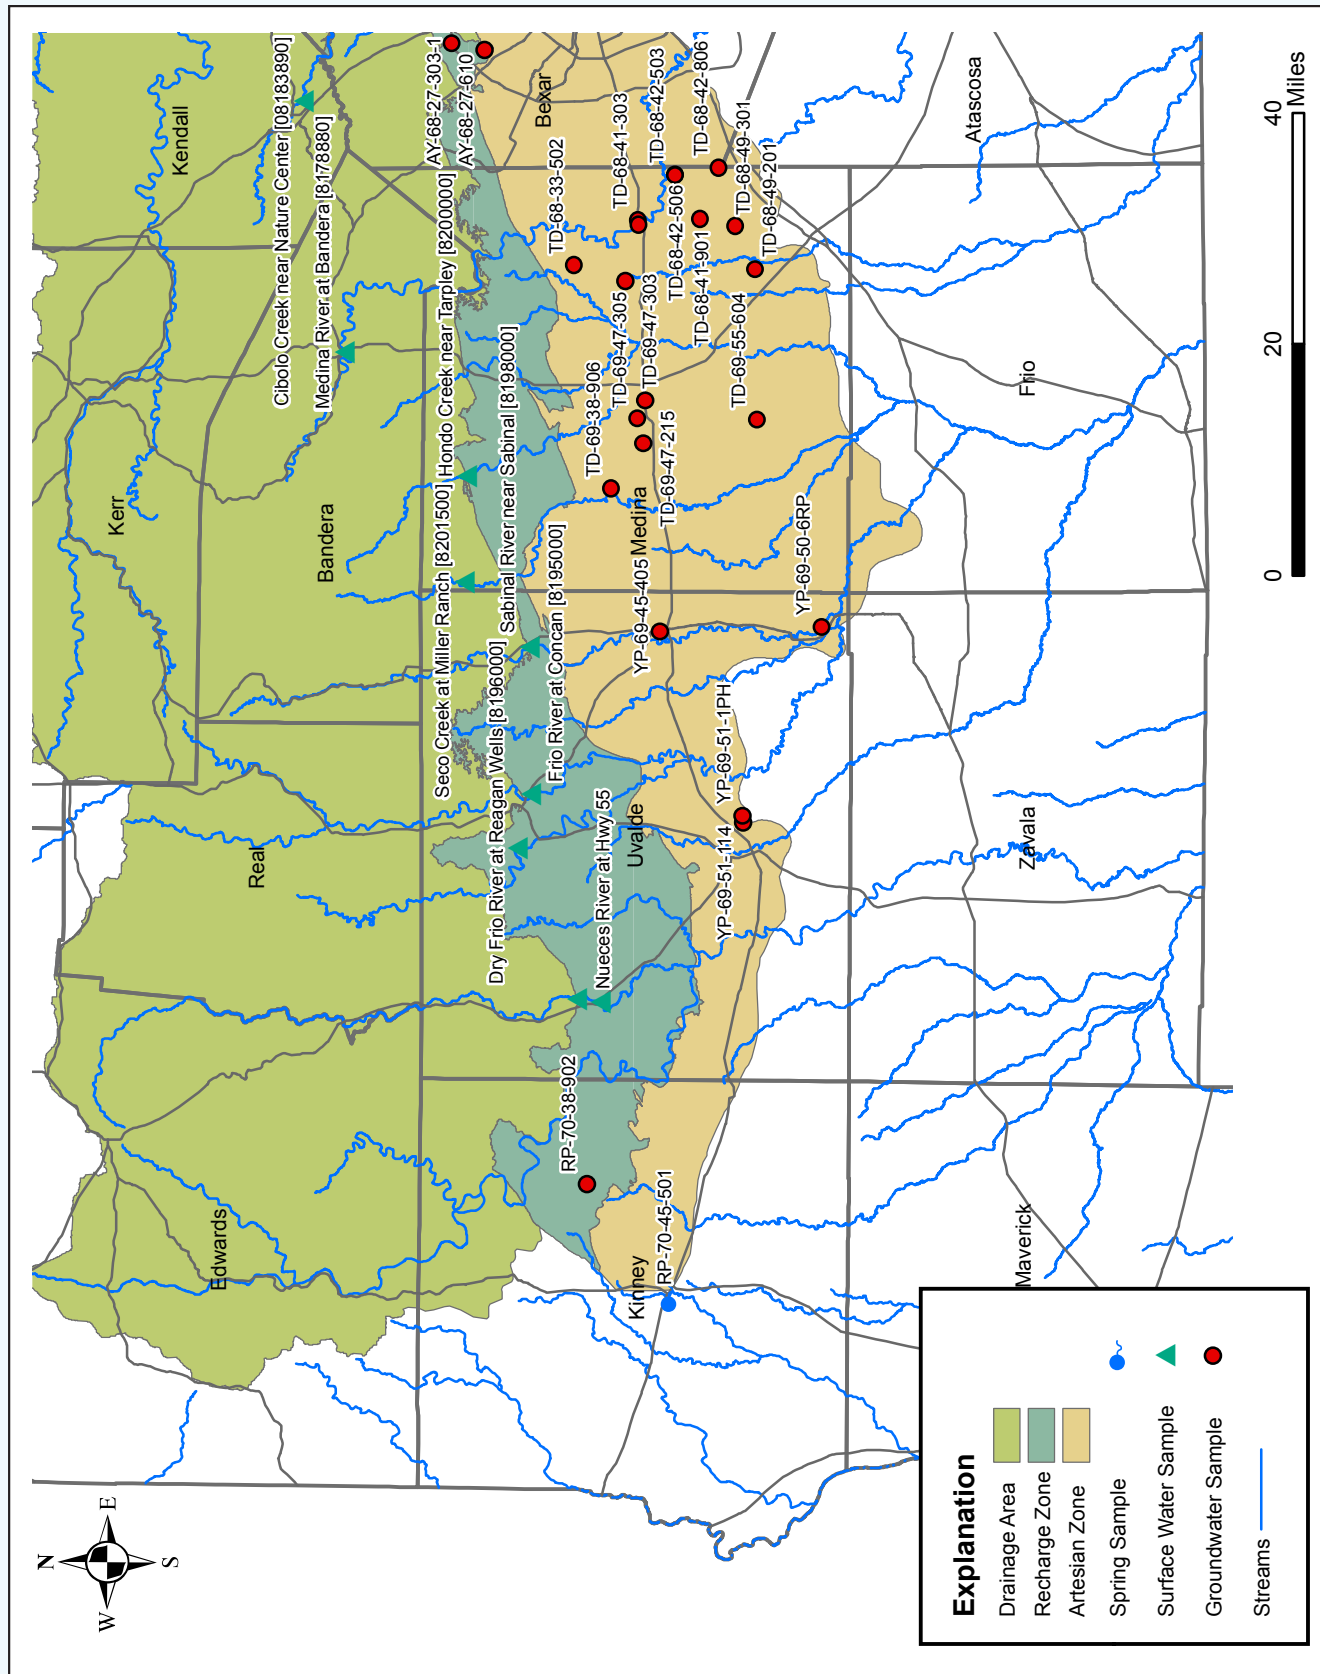


Figure 13c. Year 2013 Edwards Aquifer Authority Water Quality Sampling Locations, Bexar County

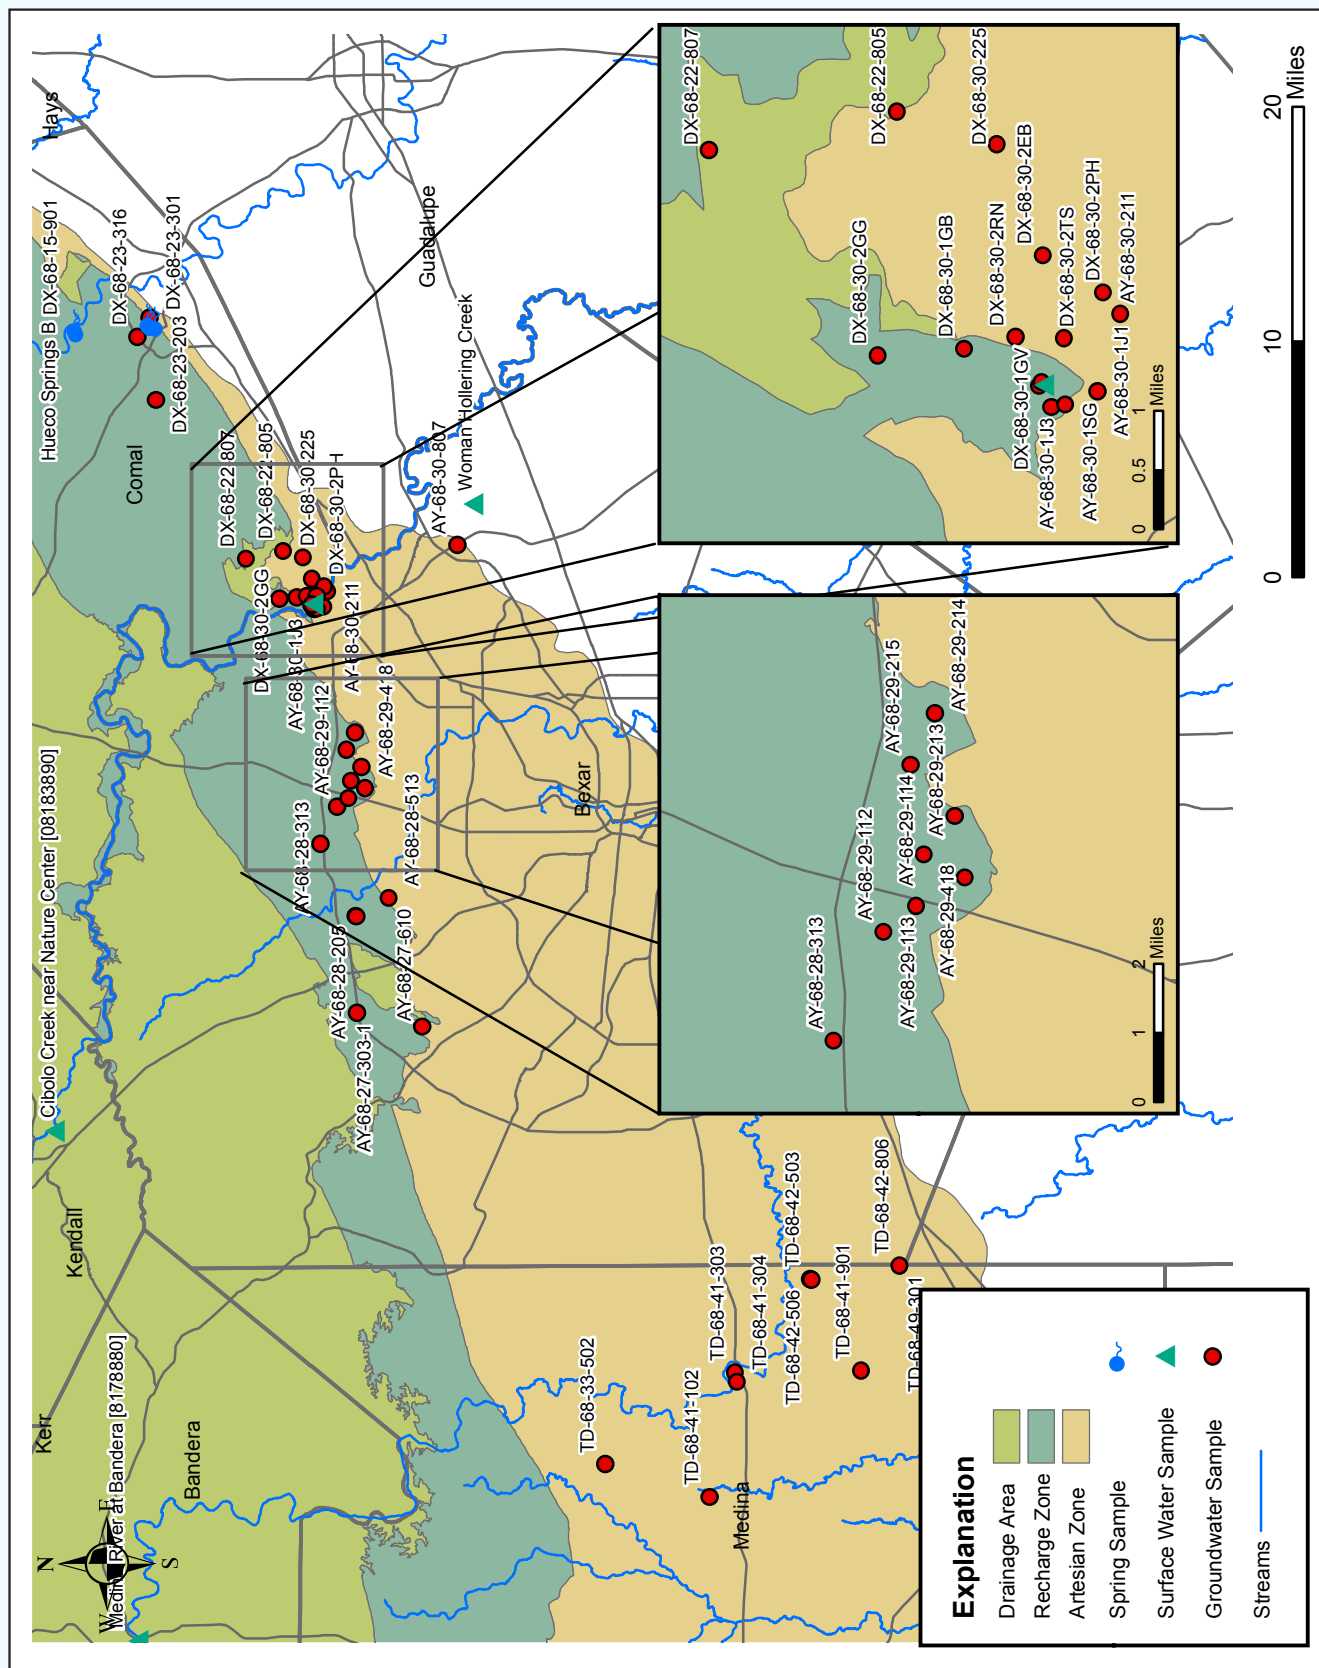

The map displays the Edwards Aquifer Recharge Area, divided into three zones: Drainage Area (light green), Recharge Zone (medium green), and Artesian Zone (yellow). The map includes county boundaries for Blanco, Comal, Hays, Kerr, Bexar, and Bandera. Key locations and sample points are labeled, including Cypress at Upstream, Blanco Upstream, Hueco Springs B, and Comal Springs #7. A legend in the bottom right corner explains the symbols used: Drainage Area, Recharge Zone, Artesian Zone, Spring Sample (blue circle), Surface Water Sample (green triangle), and Groundwater Sample (red circle). A scale bar in the bottom right indicates distances in miles (0, 5, 10).

Figure 13e. Year 2013 Edwards Aquifer Authority Water Quality Sampling Locations, Hays County

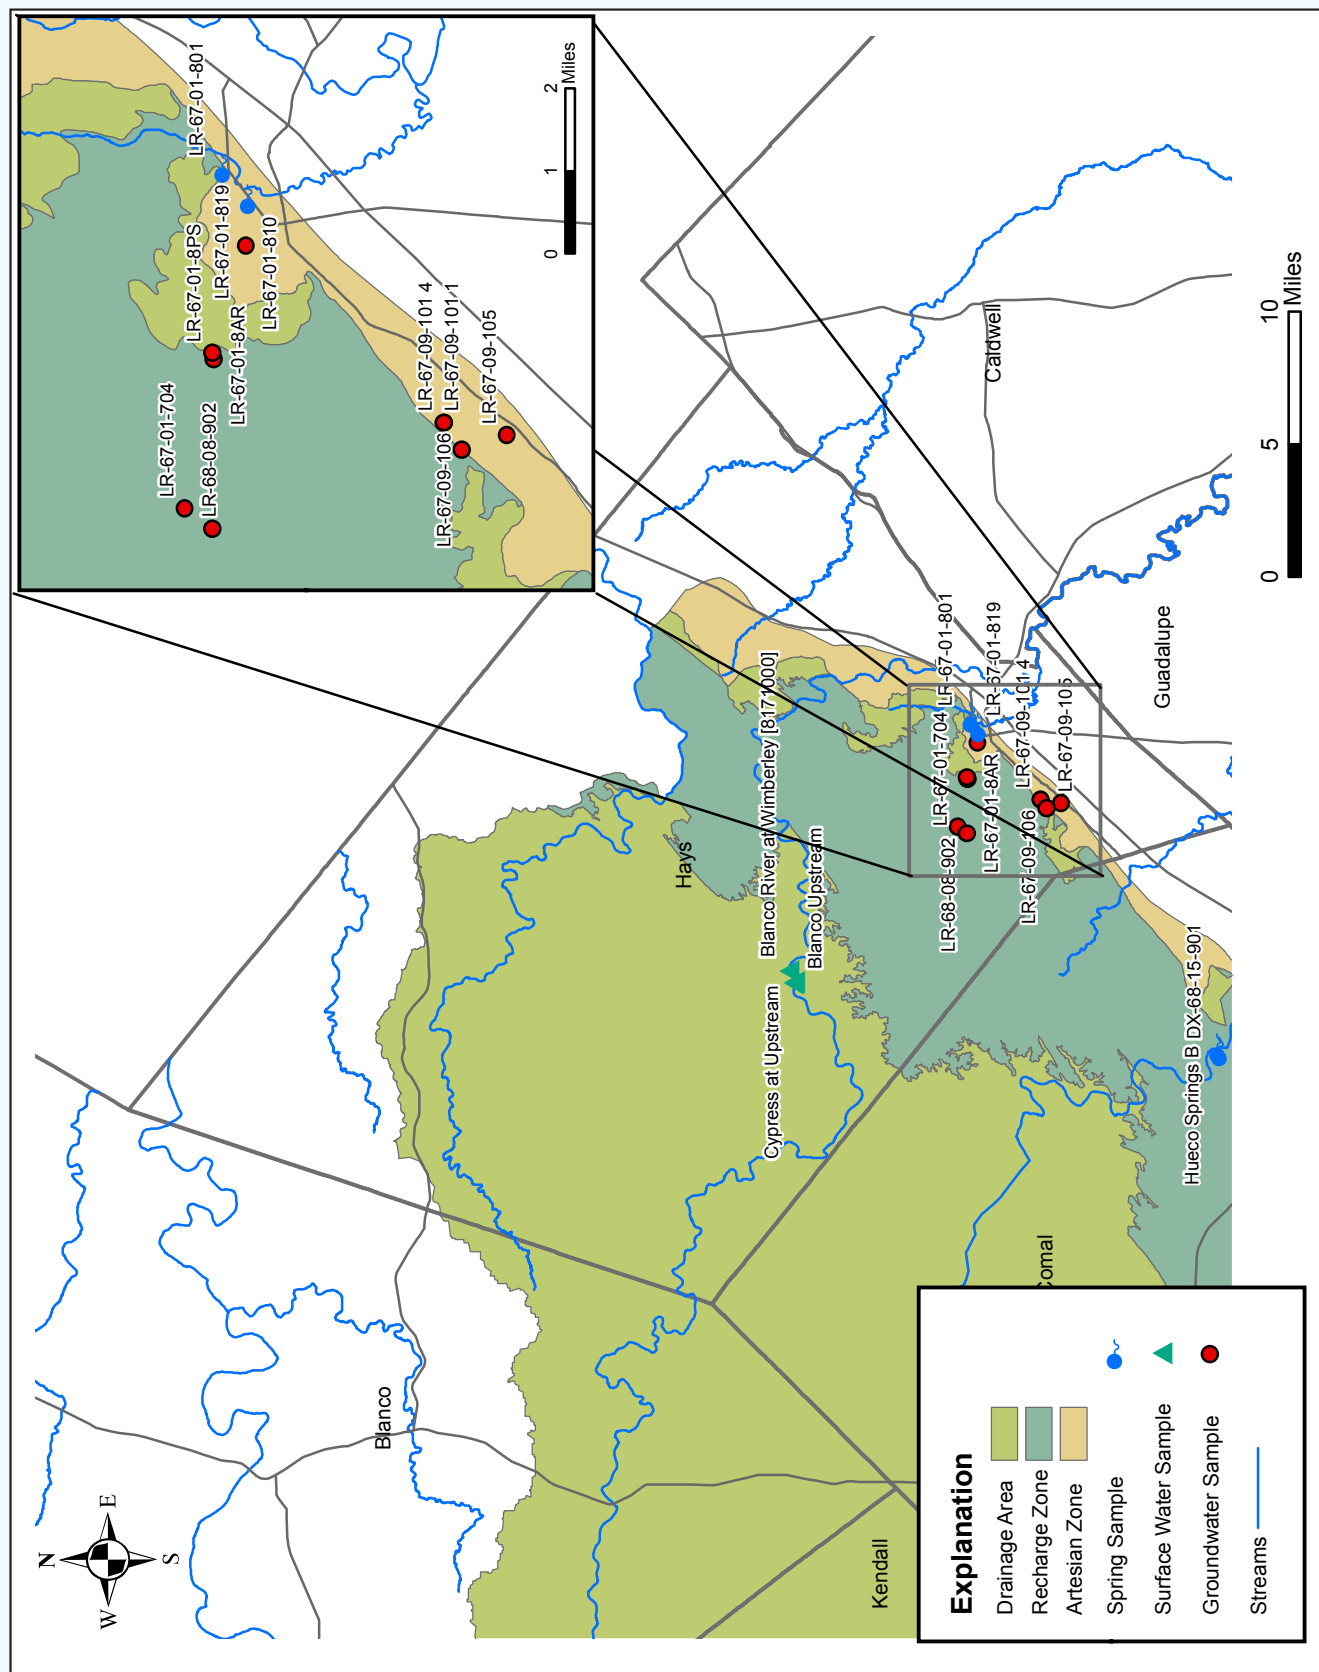


Table 14. Secondary Drinking-Water Standards.

Parameter	Secondary Drinking-Water Standards (mg/L)
Aluminum	0.05–0.2
Chloride	300
Color	15 color units
Copper	1.0
Corrosivity	Non-corosive
Fluoride	2.0
Iron	0.3
Manganese	0.05
pH	>7.0
Silver	0.10
Sulfate	300
Total dissolved solids TDS	1000
Zinc	5

Data source: 30 TAC Chapter 290, Subchapter F.

Color and corrosivity parameters were not included in the 2013 analytical program.

Routine Water Quality Data from Edwards Aquifer Wells

Groundwater samples for calendar year 2014 were analyzed by the EAA's contract laboratories—TestAmerica and the San Antonio River Authority (SARA). In addition, approximately 20 well samples per year are collected by the EAA for analyses by the Texas Water Development Board (TWDB) contract laboratory for portions of the analyses. In 2014, the Lower Colorado River Authority (LCRA), pursuant to an analytical services contract with the TWDB, provided these analyses. See Figures 13b–d for well locations.

Metals—Of the 59 wells sampled for metals, none of the concentrations exceeded drinking-water standards.

Bacteria—In 2014, 74 bacteria samples were collected from 59 wells. The EAA collects samples from wells upstream of any chlorination equipment in order to assess the presence or absence of bacteria in raw water samples from the aquifer. These sample results are not directly comparable to bacterial samples collected by most public water supply systems because public water supply samples are generally collected downstream of chlorination equipment. Wells were sampled for *Escherichia coli* (E. coli). Bacteria results are reported in units of most probable number per 100 milliliters of water (MPN/100 mL). Bacteria samples ranged in concentration from non-detectable numbers to 71 MPN/100 mL. Wells sampled under the routine sampling program with positive bacteria detections are listed in Table 15.

E. coli bacteria analyses are used to indicate the possible presence of fecal matter in groundwater and surface water.

The MCL for coliform bacterial samples is based on the size of a public water supply distribution system and is for treated water at the point of use and not from the point of withdrawal. For example, the number of monthly samples collected increases with the number of connections or size of population served. A public water supply with 100,000 connections would be required to collect 100 samples per month. If more than five percent

Table 15. Bacteria Results in Well Samples, 2014.

Bacteria	County	Well Name	Date	Result (MPN/100 mL)
<i>Escherichia coli</i>	Comal	DX-68-23-316	12/22/2014	1
<i>Escherichia coli</i>	Bexar	AY-68-29-112	12/19/2014	2
<i>Escherichia coli</i>	Hays	LR-67-09-101 1	12/17/2014	2
<i>Escherichia coli</i>	Comal	DX-68-23-316	11/19/2014	7
<i>Escherichia coli</i>	Bexar	AY-68-30-1J1	03/06/2014	71

Table 16. Elevated Nitrate-N Concentrations in Well Samples, 2014.

Chemical	County	Well Name	Date	Result (mg/L as N)
Nitrate-N	Bexar	AY-68-30-2EB	01/31/2014	5.12
Nitrate-N	Comal	DX-68-30-111	02/05/2014	7.17
Nitrate-N	Comal	DX-68-30-111	04/16/2014	6.95
Nitrate-N	Comal	DX-68-30-1GV	01/30/2014	6.29
Nitrate-N	Comal	DX-68-30-2RN	02/05/2014	5.46
Nitrate-N	Comal	DX-68-30-2TS	01/28/2014	5.39
Nitrate-N	Uvalde	YP-69-51-114	05/29/2014	5.26
Nitrate-N	Uvalde	YP-69-51-114	05/29/2014	5.29
Nitrate-N	Uvalde	YP-69-51-114	11/19/2014	5.33

of the monthly samples are coliform positive, the MCL would be exceeded. For systems that collect fewer than 40 routine bacteria samples per month, the MCL is defined as occurring when more than one sample is coliform positive (Title 30 Texas Administrative Code, 290.109). Note that samples for public water supplies are collected downstream of the chlorination device and generally from public facilities near the ends of the distribution system.

Presence of fecal bacteria may indicate a problem with laboratory or sampling methods, poor wellhead or casing maintenance, or impact to groundwater from human or animal waste. Public water supplies are required by State law to be chlorinated. Domestic wells do not have a chlorination requirement. The EAA's bacteria samples are collected with great care to avoid post-collection contamination.

Nitrate—In 2014, 87 nitrate-nitrite as nitrogen (*nitrate* for this report) samples were collected from 59 wells. Nitrate is a highly soluble, naturally occurring compound in both surface water and groundwater. The largest amounts of naturally occurring nitrate in surface water and groundwater are derived from direct absorption from the air and soil during rainfall events. Concentrations of nitrate below one mg/L are generally considered background from natural sources. Concentrations above two mg/L are considered slightly elevated. Potential sources of elevated nitrate include runoff from agricultural and urban sources (fertilizer from farm fields and yards), septic systems, leaking sewer lines, and animal waste. Concentrations of nitrate above the MCL of ten mg/L pose an increased risk for methemoglobinemia or *blue*

baby syndrome, which results from nitrates interfering with the ability of blood to carry oxygen in infants usually younger than six months. Methemoglobinemia can also affect senior adults.

Of the 59 wells sampled for nitrate, no concentrations exceeded the MCL of ten mg/L. Nine samples contained concentrations above five mg/L but less than ten mg/L. Results from a total of 22 wells indicated nitrate concentrations at or above two mg/L but less than five mg/L. The EAA is studying historical nitrate concentrations to identify trends that may indicate contamination sources.

Nitrate detections above five mg/L were found in samples from six wells (Table 16).

Volatile Organic Compounds (VOCs)—In 2014, water samples collected from 56 wells were analyzed for VOCs, and eight compounds were detected. None of the compounds exceeded their respective regulatory limits (statement applies to compounds for which a regulatory limit is established). Detections are summarized in Table 17 by county.

In general, sources of the detected compounds are not known. Chloroform, for example, was the most frequently detected VOC in 2014, with eight detections in well samples. Chloroform is a common byproduct associated with chlorination of water; however, the samples herein are not collected from a chlorinated source. The USGS indicates that many potential sources for chloroform in groundwater exist and include septic effluent, leaking sewer lines, and irrigation using chlorinated water (Ivashenko and Zogorski, 2006). These detections may

Table 17. Volatile Organic Compound Results in Well Samples, 2014.

Chemical	County	Well Name	Date	Result (µg/L)
Chloroform	Bexar	AY-68-29-418	12/17/2014	0.24J
Chloroform	Bexar	AY-68-29-418	09/22/2014	0.251J
Dichlorobromomethane	Bexar	AY-68-27-610	12/15/2014	0.426J
Bromodichloromethane	Bexar	AY-68-28-313	04/28/2014	0.464J
Chloroform	Bexar	AY-68-27-303-1	04/23/2014	0.56J
Chloroform	Bexar	AY-68-29-213	03/17/2014	0.651J
Chloroform	Bexar	AY-68-29-214	03/20/2014	1.42
Chloroform	Bexar	AY-68-27-610	12/15/2014	2.09
Chloroform	Bexar	AY-68-28-313	04/28/2014	2.33
Tetrachloroethene	Bexar	AY-68-29-418	05/01/2014	4.21
Tetrachloroethene	Bexar	AY-68-29-418	12/17/2014	4.34
Tetrachloroethene	Bexar	AY-68-29-418	03/20/2014	4.48
Tetrachloroethene	Bexar	AY-68-29-418	09/22/2014	4.96
Acetone	Bexar	AY-68-29-214	03/20/2014	5.38J
Acetone	Hays	LR-67-01-8AR	11/20/2014	7.43J
Chloroform	Medina	TD-68-42-503	05/21/2014	0.528J
Dibromochloromethane	Medina	TD-68-49-301	05/21/2014	0.803J
Bromoform	Medina	TD-68-49-301	05/21/2014	1.31J
Toluene	Uvalde	YP-69-50-6RP	03/26/2014	1.68
Tetrachloroethene	Uvalde	YP-69-51-114	11/19/2014	2.88
Tetrachloroethene	Uvalde	YP-69-51-114	05/29/2014	2.97

Note: J = Detection above method detection limit but below reporting limit.

also be associated with collecting samples influenced by a nearby well that has recently been “shocked” or disinfected with chlorine by the well owner.

The second most frequently detected VOC in 2014 was tetrachloroethene (PCE), which was detected in two wells in 2014. This compound is a common organic solvent used in the dry-cleaning industry, as well as degreasing processes for mechanical parts.

The PCE detections in Bexar County are from an unknown source; however, the matter is currently being investigated. The PCE detection in Uvalde County is from a release associated with a dry-cleaning facility.

Semivolatile Organic Compounds (SVOCs), Herbicides, Pesticides, and Polychlorinated Biphenyls (PCBs)

In 2014, SVOCs were detected in four samples from a total of 48 wells for the year (Table 18). Detections were significantly below applicable regulatory limits. Most of the detections were in the sample from well LR-67-09-101-4 in Hays County.

Pesticides and Herbicides—In 2014, water samples collected from 43 wells were analyzed for pesticides and herbicides. Herbicide compounds were detected in samples from four wells, and no pesticide compounds were detected. The herbicide concentrations did not exceed their regulatory limits, although they are considered tentative because of the “J” qualifier. Detections are summarized by county in Table 19.

Pharmaceutical and Personal Care Products (PPCPs)—Water samples collected from three wells were analyzed for pharmaceutical and personal care products (PPCPs) in 2014, and the results are listed in Table 20. Cotinine is a metabolite of nicotine.

Detections of non-naturally occurring compounds in a karst system such as the Edwards Aquifer are problematic because contaminants may pass through the system quickly. As such, periodic sample-collection events occurring every several months may not coincide with the flux of a contaminant at the sample point. Therefore, ascertaining whether the sample result

Table 18. Semivolatile Organic Compound Results in Well Samples, 2014.

Chemical	County	Well Name	Date	Result (µg/L)
Benzo[a]anthracene	Hays	LR-67-09-101-4	09/16/2014	0.0228J
Benzo[g,h,i]perylene	Hays	LR-67-09-101-4	09/16/2014	0.0246J
Benzo[b]fluoranthene	Hays	LR-67-09-101-4	09/16/2014	0.0249J
Benzo[a]pyrene	Hays	LR-67-09-101-1	09/16/2014	0.0275J
Benzo[b]fluoranthene	Hays	LR-67-09-101-1	09/16/2014	0.0304J
Benzo[a]anthracene	Hays	LR-67-09-101-1	09/16/2014	0.0314J
Chrysene	Hays	LR-67-09-101-1	09/16/2014	0.0322J
Benzo[k]fluoranthene	Hays	LR-67-09-101-1	09/16/2014	0.0324J
Indeno(1,2,3-cd)pyrene	Hays	LR-67-09-101-1	09/16/2014	0.0342J
Benzo[g,h,i]perylene	Hays	LR-67-09-101-1	09/16/2014	0.036J
1,3-Dimethylnaphthalene	Hays	LR-67-01-704	08/28/2014	0.0369J
Dibenz(a,h)anthracene	Hays	LR-67-09-101-1	09/16/2014	0.0381J
1,3-Dimethylnaphthalene	Medina	TD-68-42-503	05/21/2014	0.0299J
1,3-Dimethylnaphthalene	Medina	TD-68-42-806	05/21/2014	0.0652

Note: J = Detection above method detection limit but below reporting limit.

Table 19. Pesticide and Herbicide Results in Well Samples, 2014.

Chemical	County	Well Name	Date	Result (µg/L)
Dichlorprop	Hays	LR-67-09-105	11/20/2014	0.371J
EPN	Uvalde	YP-69-51-1PH	08/14/2014	0.0745J

Note: J = Detection above method detection limit but below reporting limit.

Table 20. Pharmaceuticals and Personal Care Product Results in Well Samples, 2014.

Chemical	County	Well Name	Date	Result (ng/L)
Cotinine	Hays	LR-67-09-106	11/20/2014	4.02J

Note: J = Detection above method detection limit but below reporting limit.

reflects the low, middle, or high end of the contaminant flux is impossible. Water tracing compounds, injected into the aquifer as part of the EAA's research program, are good surrogates for the behavior of contaminants in groundwater. Most tracers exhibit transient detections at specific monitoring locations in the aquifer and help explain why a contaminant may be detected once but may not be detected during subsequent sampling several weeks or months later.

Karst properties of the Edwards Aquifer require collection of multiple samples from a single point during the year so that a representative perspective of water quality can be obtained. The EAA sampling program has therefore been modified to collect multiple samples from select

wells during the year while maintaining annual sampling at many wells aquiferwide. For example, wells with more than one detection listed for a single compound were sampled more than once during the year.

In summary, water samples from the Edwards Aquifer indicate the presence of anthropogenic compounds generally in limited areas and predominantly at concentrations below the MCL or regulatory limit. However, the presence of multiple anthropogenic compounds at various well-sample locations indicates a sensitivity of the aquifer to the introduction of contaminants. The number of chloroform detections provides a good example of these anthropogenic impacts in certain areas.

Routine Water Quality Data from Streams and Springs in the Edwards Aquifer Area

Water quality data from streams are generally collected within the drainage area and recharge zone of the aquifer (see Figure 13a) at USGS gauging stations located upstream of the Edwards Aquifer Recharge Zone. The primary surface water data collection sites are located within eight major stream basins that flow across the recharge zone and contribute significant groundwater recharge to the Edwards Aquifer. The streams monitored (historically), from west to east, are the Nueces River, Dry Frio River, Frio River, Sabinal River, Seco Creek, Hondo Creek, Medina River, and Blanco River. In 2014, surface or stream water samples were collected from each of these eight historically sampled rivers and creeks. In addition, San Geronimo Creek in Bexar and Medina counties was sampled once at three different locations, as well as Cibolo Creek in Kendall County and Cypress Creek in Hays County. Data from most of these sites can be used as a baseline to evaluate the quality of water recharging the aquifer and to provide a measure of the potential fluctuations in water quality due to land use changes in the Edwards Aquifer region.

Water quality data are also routinely collected from four major spring groups discharging from the aquifer because they provide composite samples of the vast underground drainage network that makes up the aquifer. In 2014, multiple spring orifices were sampled at Comal, Hueco, and San Marcos springs on a monthly basis, and Las Moras (Fort Clark) Springs in Kinney County was sampled once. San Pedro and San Antonio springs were effectively dry all year. In total,

72 samples were collected at all springs across the region from the multiple sampling events.

Summary of Analytical Results—Water samples from the stream locations and spring groups discussed previously were analyzed for the following metals: aluminum, antimony, arsenic, barium, beryllium, boron, bromide, cadmium, chromium, cobalt, copper, iron, lead, lithium, manganese, mercury, molybdenum, nickel, selenium, silver, strontium, thallium, vanadium, and zinc. Detectable metal concentrations in surface and spring water are common at trace amounts. Samples from streams and springs were also analyzed for nitrates, pesticides, herbicides, PCBs, and bacteria. Additional analyses for VOCs, SVOCs, and PPCPs were performed at surface water locations and spring locations in 2014. See Figures 13b–e for sample locations.

Metals—Of the 14 surface water collection sites and four spring groups sampled for metals, one metal was detected at concentrations in excess of an MCL value. Thallium was detected in Comal and Hays counties above an MCL of 2.0 µg/L. Iron was detected above its secondary drinking-water standard of 300 mg/L in three samples. These detections are summarized in Table 21.

Thallium is not commonly detected above the MCL in the aquifer. Potential sources of thallium include leaching from ore processing or discharge from electronics, glass, or drug factories (<http://water.epa.gov/drink/contaminants/basicinformation/thallium.cfm>).

Nitrates—Laboratory analyses indicated a limited range of nitrate (nitrate-nitrite as nitrogen) concentrations in surface water and a fairly wide range in spring-water

Table 21. Metal Results in Streams and Springs, 2014.

Chemical	County	Site Name	Date	Result (µg/L)
Iron	Comal	Comal Springs #7 (DX-68-23-324)	09/03/2014	1,240
Thallium	Comal	Comal Springs #3 (DX-68-23-321)	08/05/2014	3.16
Iron	Hays	San Marcos Springs-Hotel (LR-67-01-801)	06/30/2014	410
Thallium	Hays	San Marcos Springs-Hotel (LR-67-01-801)	08/04/2014	2.76
Iron	Hays	San Marcos Springs-Deep (LR-67-01-819)	09/02/2014	2,960

Note: J = Detection above method detection limit but below reporting limit.

Table 22. Semivolatile Organic Compound and PCB Results in Streams and Springs, 2014.

Chemical	County	Site Name	Date	Result (µg/L)
Bis(2-ethylhexyl)phthalate	Comal	Comal Springs #3 (DX-68-23-321)	01/07/2014	5.02J
Butyl benzyl phthalate	Comal	Comal Springs #3 (DX-68-23-321)	01/07/2014	2.8J
Di-n-butyl phthalate	Comal	Comal Springs #3 (DX-68-23-321)	01/07/2014	0.548J
Di-n-butyl phthalate	Comal	Comal Springs #3 (DX-68-23-321)	03/04/2014	0.691J
Bis(2-ethylhexyl)phthalate	Comal	Comal Springs #3 (DX-68-23-321)	06/03/2014	21.4
Bis(2-ethylhexyl)phthalate	Comal	Comal Springs #3 (DX-68-23-321)	01/07/2014	24.3
Di-n-butyl phthalate	Comal	Comal Springs #7 (DX-68-23-324)	01/07/2014	0.523J
Bis(2-ethylhexyl)phthalate	Comal	Comal Springs #7 (DX-68-23-324)	03/04/2014	11.1J
Di-n-butyl phthalate	Comal	Comal Springs #7 (DX-68-23-324)	03/04/2014	0.579J
Bis(2-ethylhexyl)phthalate	Comal	Comal Springs #7 (DX-68-23-324)	06/03/2014	6.16J
Bis(2-ethylhexyl)phthalate	Comal	Hueco Springs A (DX-68-15-901)	06/02/2014	13.5J
Bis(2-ethylhexyl)phthalate	Hays	San Marcos Springs-Hotel (LR-67-01-801)	06/30/2014	5.76J
Bis(2-ethylhexyl)phthalate	Hays	San Marcos Springs-Hotel (LR-67-01-801)	08/04/2014	6.22J
Di-n-octyl phthalate	Hays	San Marcos Springs-Hotel (LR-67-01-801)	11/03/2014	4.52J
Butyl benzyl phthalate	Hays	San Marcos Springs-Deep (LR-67-01-819)	09/29/2014	4.65J

Note: J = Detection above method detection limit but below reporting limit.

samples in 2014. Of the 21 surface water samples collected and analyzed for nitrate, concentrations ranged from less than 0.5 to 14.5 mg/L-N. Of the 71 spring-water samples collected and analyzed for nitrate, concentrations ranged from less than 0.75 to 2.14 mg/L-N. Cibolo Creek near the Nature Center in Kendall County was the only surface water location that exceeded an MCL of 10 mg/L for drinking water, with a concentration of 14.5 mg/L-N in 2014.

Bacteria—In 2014, most surface water and spring samples were tested for bacteria. It is not unusual for surface water and spring samples to have positive detections of bacteria, especially in wet years (for example, in 2007 counts ranged to “too numerous to count” during periods of heavy runoff). Bacteria counts for surface streams in 2014 ranged up to 2,200 MPN/100 mL for *E. coli*, which was measured in a sample from the Blanco River at Wimberley in Hays County. Spring-water samples for bacteria ranged up to 240 MPN/100 mL for *E. coli*, which was measured in a sample from Hueco B Springs in Comal County.

Volatile Organic Compounds (VOCs)—In 2014, water samples collected from two surface water sites and all four spring groups were analyzed for VOCs, and two compounds (methylene chloride and acetone) were detected in four spring samples. Because the detections

were tentative and/or present in the laboratory blanks, however, it is unlikely that they were present in the samples.

Semivolatile Organic Compounds (SVOCs), Herbicides, Pesticides, and Polychlorinated Biphenyls (PCBs)—

Widespread detections of organic compounds in surface and spring water are generally not common in the Edwards Aquifer region. However, the EAA analyzes samples for these compounds because their detection can indicate the presence of chemicals originating from anthropogenic sources (Table 22). Streams sampled in 2014 contained only bis(2 ethylhexyl)phthalate (DEHP), which is a plasticizer, although the detections were tentative because of low concentrations and blank contamination. However, DEHP and other phthalates were also detected in several spring samples. No PCBs were detected in spring samples.

The most common SVOC detected in spring samples for the year was DEHP, which was detected in approximately 17 percent of the samples. Some of the sample-collection equipment (specific to spring sampling) utilizes plastic tubing containing DEHP, although not all spring samples are exposed to that equipment. Whether DEHP detections are false positives or representative of actual conditions is difficult to determine because DEHP is ubiquitous in most plastics, as well as cosmetics, inks, adhesives, and pesticides, and it is also used as

Table 23. Herbicide and Pesticide Results in Streams and Springs, 2014.

Chemical	County	Site Name	Date	Result (µg/L)
EPN	Comal	Comal Springs #3 (DX-68-23-321)	10/02/2014	0.0795J
Fensulfothion	Comal	Comal Springs #7 (DX-68-23-324)	09/03/2014	0.184J
EPN	Comal	Comal Springs #7 (DX-68-23-324)	09/03/2014	0.224J
4,4'-DDT	Hays	San Marcos Springs-Hotel (LR-67-01-801)	03/03/2014	0.0311J
Dicamba	Uvalde	Frio River at Concan [8195000]	10/08/2014	0.116J

Note: J = Detection above method detection limit but below reporting limit.

lubricating oil for vacuum pumps and as a dielectric fluid. The validity of DEHP detections in spring samples has been assessed by analyzing various blank samples and duplicate samples and experimenting with alternative sampling equipment. Generally the compound was present in laboratory blank samples for the springs. In fact, only a few DEHP detections had no accompanying blank detection. Unfortunately, alternative equipment is not viable for all sample sites (specifically San Marcos Springs-Deep [LR-67-01-819] and Hueco B Springs). On the basis of continued evaluation of this compound, however, the EAA has concluded that some detections are valid, and it will continue to evaluate the validity of DEHP detections in samples.

Detected compounds for surface-water and spring-water samples are summarized below. Detections of DEHP that are potentially valid are included in the summary, whereas detections considered to be false positives are omitted from the summary.

EPN was the most common herbicide or pesticide detected in stream or spring samples (Table 23). Dicamba, Fensulfothion, and 4,4'-DDT were also detected. None of the concentrations exceed a drinking-water standard.

Pharmaceutical and Personal Care Products (PPCPs)—Water samples collected from five surface water sites and four springs were analyzed for PPCPs in 2014, and PPCP compounds were detected in samples from all the surface water sites and all the springs except Comal Springs #7 (DX-68-23-321). Detections are summarized by sample site in Table 24. These detections are in the nanogram per liter (ng/L) range. The most commonly detected PPCP compounds were caffeine, DEET (an insect repellent), estrone (an estrogenic

hormone), and progesterone (a hormone medication). Currently, PPCP compounds detected in environmental samples do not have a regulatory limit.

Freshwater/Saline-Water Interface Studies

The regional boundary between fresh and saline parts of the Edwards Aquifer is defined by a mapped iso concentration line representing 1,000 mg/L of total dissolved solids (TDS). Groundwater is commonly classified according to TDS concentrations (Table 25).

The interface varies both laterally and vertically in the aquifer, as determined from several wells near the boundary. Locally this line is referred to as the *freshwater/saline-water interface*, or *bad-water line*, which defines the farthest down-dip extent of potable water (Pavlicek and others, 1987). The approximate location of the freshwater/saline-water interface is shown in Figure 1. Water quality concerns related to the position and stability of the freshwater/saline-water interface have been expressed by some researchers. However, water quality data collected during and since the drought of record in the 1950s do not indicate any significant movement of the interface during the range of observed aquifer conditions.

South and southeast of the interface, water from the aquifer is slightly to moderately saline and contains moderate to large concentrations of dissolved sodium chloride and sulfate. The interface varies both laterally and vertically, as determined in several wells near the boundary. Water from some wells north of the interface, and from all wells south of the interface, contains dissolved hydrogen sulfide gas. In most wells along the interface, freshwater has been encountered in the upper part and saline water in the lower part of the Edwards Aquifer (Reeves, 1971; Groschen, 1993). A few

Table 24. Pharmaceutical and Personal Care Product Results in Streams and Springs, 2014.

Chemical	County	Site Name	Date	Result (ng/L)
17a-Estradiol	Comal	Comal Springs #1 (DX-68-23-301)	04/01/2014	1.09JH
Progesterone	Comal	Comal Springs #1 (DX-68-23-301)	04/01/2014	1.9JH
Progesterone	Comal	Comal Springs #1 (DX-68-23-301)	06/30/2014	2.2J
Equilenin	Comal	Hueco Springs A (Hueco Springs A (DX-68-15-901))	03/31/2014	0.681JH
Estriol	Comal	Hueco Springs A (DX-68-15-901)	03/31/2014	3.01JH
Progesterone	Comal	Hueco Springs A (DX-68-15-901)	03/31/2014	1.25JH
17a-Estradiol	Hays	Blanco River at Wimberley [8171000]	05/13/2014	1.12J
Caffeine	Hays	Blanco River at Wimberley [8171000]	05/13/2014	110
Cotinine	Hays	Blanco River at Wimberley [8171000]	05/13/2014	3.44J
Estriol	Hays	Blanco River at Wimberley [8171000]	05/13/2014	3.02J
Ibuprofen	Hays	Blanco River at Wimberley [8171000]	05/13/2014	17J
Acetaminophen	Hays	Blanco River at Wimberley [8171000]	07/24/2014	11.2J
Caffeine	Hays	Blanco River at Wimberley [8171000]	07/24/2014	15.8J
Cotinine	Hays	Blanco River at Wimberley [8171000]	07/24/2014	6.91J
DEET	Hays	Blanco River at Wimberley [8171000]	07/24/2014	109
Estrone	Hays	Blanco River at Wimberley [8171000]	07/24/2014	1.22J
Caffeine	Hays	Blanco River Upstream of Cypress Creek	09/18/2014	55.9
DEET	Hays	Blanco River Upstream of Cypress Creek	09/18/2014	30.6
Thiabendazole	Hays	Blanco River Upstream of Cypress Creek	09/18/2014	34.3
Caffeine	Hays	Cypress Creek above Confluence with Blanco River	09/18/2014	305
Cotinine	Hays	Cypress Creek above Confluence with Blanco River	09/18/2014	5.95J
DEET	Hays	Cypress Creek above Confluence with Blanco River	09/18/2014	49.1
Ibuprofen	Hays	Cypress Creek above Confluence with Blanco River	09/18/2014	45
Estrone	Hays	San Marcos Springs-Hotel (LR-67-01-801)	03/31/2014	1.09JH
Progesterone	Hays	San Marcos Springs-Hotel (LR-67-01-801)	03/31/2014	1.27JH
17b-Estradiol	Kendall	Cibolo Creek near Nature Center	09/03/2014	4.36J
Acetaminophen	Kendall	Cibolo Creek near Nature Center	09/03/2014	9.11J
Caffeine	Kendall	Cibolo Creek near Nature Center	09/03/2014	90.9
Carbamazepine	Kendall	Cibolo Creek near Nature Center	09/03/2014	195
Cotinine	Kendall	Cibolo Creek near Nature Center	09/03/2014	30.5
DEET	Kendall	Cibolo Creek near Nature Center	09/03/2014	166
Diltiazem	Kendall	Cibolo Creek near Nature Center	09/03/2014	10.7
Estrone	Kendall	Cibolo Creek near Nature Center	09/03/2014	1.25J
Naproxen	Kendall	Cibolo Creek near Nature Center	09/03/2014	23J
p-Nonylphenol	Kendall	Cibolo Creek near Nature Center	09/03/2014	1.65J
Sulfamethoxazole	Kendall	Cibolo Creek near Nature Center	09/03/2014	364
Thiabendazole	Kendall	Cibolo Creek near Nature Center	09/03/2014	32.2
Triclocarban	Kendall	Cibolo Creek near Nature Center	09/03/2014	5.11J
Trimethoprim	Kendall	Cibolo Creek near Nature Center	09/03/2014	19.8
Caffeine	Uvalde	Frio River at Concan [8195000]	05/14/2014	13.5J
Cotinine	Uvalde	Frio River at Concan [8195000]	05/14/2014	4.45J
Estrone	Uvalde	Frio River at Concan [8195000]	05/14/2014	1.21J
Progesterone	Uvalde	Frio River at Concan [8195000]	05/14/2014	2.61J

Note: J = Detection above method detection limit but below reporting limit.

H = Sample prepped or analyzed beyond specified holding time.

Table 25. Classification of Groundwater Quality on the Basis of Total Dissolved Solids

Description	TDS Concentration (mg/L)
Fresh	Less than 1,000
Slightly saline	1,000 to 3,000
Moderately saline	3,000 to 10,000
Very saline	10,000 to 35,000
Brine	More than 35,000

Source: Winslow and Kister, 1956.

(continued from p. 57)

wells along the interface have encountered the opposite vertical distribution, with saline-water zones overlying freshwater zones, particularly in southern Medina County.

In 1985 the USGS, in cooperation with the Edwards Underground Water District (EUWD), TWDB, and the City Water Board—now San Antonio Water System (SAWS)—initiated a research study of the freshwater/saline-water interface. A series of seven wells were drilled in the area of the Freeman Coliseum in San Antonio, which transects the freshwater/saline-water interface, to detect changes in water quality as the hydraulic head in the aquifer changes. This program was implemented in response to the concern that increased aquifer withdrawals might result in encroachment of saline water into the aquifer's freshwater zone.

Additional water quality monitor-well transects across the freshwater/saline-water interface were installed by the EUWD between 1989 and 1993.

SAWS, working with the USGS, TWDB, and the EAA, installed additional transects of freshwater/saline-water interface monitoring wells through 2005. To date, the following transects of monitoring wells have been installed:

- Artesia Pump Station (San Antonio) Transect (installed in 1986)
- New Braunfels (Comal Springs area) Transect (installed in 1989)
- San Marcos (San Marcos Springs area) Transect (installed in 1991)
- South Medina Well (installed in 1993)
- Kyle Transect (installed in 1998)
- East Uvalde “Knippa Gap” Transect (installed in 1999)
- “Tri-County” (Bexar-Comal-Guadalupe) Transect (installed in 2000)
- Hays–Fish Hatchery Transect (installed in 2001)
- Mission Road Transect (installed in 2002)
- Pitluk Transect Bexar County (installed in 2005).

Studies conducted to date indicate that, over the historical range, changes in aquifer water levels have little effect on water quality in wells adjacent to the freshwater/saline-water interface. The EAA, USGS, and SAWS will continue to monitor water quality in the freshwater/saline-water interface monitoring wells.

SIGNIFICANT EVENTS AFFECTING THE EDWARDS AQUIFER IN CALENDAR YEAR 2014


Calendar year 2014 brought no relief from drought conditions that have persisted in the Central Texas region for the past several years. With the exception of years 2004, 2007 and 2010, total annual recharge to the Edwards Aquifer has been significantly below the long-term (1934–2014) average of almost 700,000 acre-feet since 2003. The 2014 estimated total annual recharge of 107,200 acre-feet was the second-lowest estimate on record. On March 28, 2013, the Uvalde pool of the aquifer reached the Stage V critical-period management trigger for the first time, when the 10-day average water level in Uvalde Index Well J-27 fell below 840 feet above mean sea level (msl). The Uvalde pool remained in Stage V for the rest of 2013 and 2014. The San Antonio pool fared marginally better and finished the year with San Antonio Index Well J-17 below the Stage III critical-period management trigger of 633.8 feet msl.

Rainfall amounts across the region in 2014 ranged from approximately two inches below average to over ten inches below average, which is the seventh straight year of rainfall deficit. Over the period 2003 through 2014, the region has suffered persistent drought conditions such that the mean rainfall deficit is -82 inches, or the equivalent of 2.7 out of 12 years with no rainfall based on a 30-inch annual mean (Figure 14). Additionally, 2014 recharge of 107,200 acre-feet is the second lowest on record. In September 2011, most of Texas was in exceptional drought condition (Figure 15)—the result of several years of below-normal rainfall, 2011 being exceptionally low. According to the Texas Office of the State Climatologist, the period from

October 2010 through September 2011 was the driest 12-month period on record, with statewide rainfall totals far below the previous record low set in 1956 (Nielsen-Gammon, 2011). Annual rainfall totals remained below average in 2012 through 2014 but produced enough precipitation combined with cooler temperatures to improve overall drought conditions throughout most of Texas by the end of 2014 (Figure 16). However, groundwater levels in the Edwards Aquifer continued to decline as a result of low soil moisture levels and the scarcity of heavy rainfalls over the recharge and contributing zones.

In the 12-year period from 2003 through 2014, recharge to the aquifer was significantly below average in ten of those years. Over 50 percent of the total recharge for this period occurred in 2004 and 2007, with a total of 4.3 million acre-feet occurring in these two years. The remaining years accounted for a total 3.6 million acre-feet of recharge, 2003, 2005, and 2010 accounting for


Figure 14. Regional Mean Rainfall Deficits, 2003 through 2014

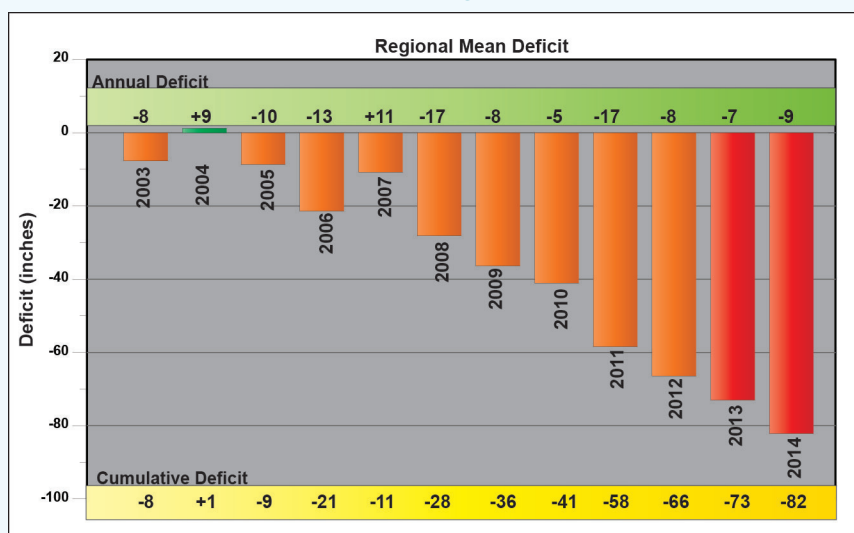

over 60 percent of that total (Figure 17). The general declining trend of water levels since 2003 in Uvalde and Bexar counties can be seen in Figure 18, which also shows the estimated total annual recharge and mean rainfall deficits for that period. A very wet summer in 2007 brought water levels in the Uvalde and San Antonio pools back to nearly record high levels. Water levels began to decline sharply, however, owing to regionally abnormally dry conditions in years 2008 and 2009. Water levels recovered with moderately wet conditions in the first half of 2010 but fell sharply again during a period of record drought conditions. To exacerbate these dry conditions, June through August 2011 average temperatures across Texas were about 2.5°F warmer than any previous Texas summer and over 5°F above the long-term summer average.

When compared with those of the drought of record, water levels at Index Well J-17 remained higher despite increased population and demands of the region (Figure 19). The Edwards Aquifer Authority Act, which provides the ability to limit withdrawals through the permitting system and Critical Period Management pumping reductions, has contributed to more efficient management of groundwater use. The effect of EAA's management of groundwater withdrawals is illustrated in Figure 20, which shows the trend in monthly pumping from the Edwards Aquifer for years 1947 through 2011 (monthly pumping data are not yet compiled for 2012 and later years). Although pumping varies according to time of year and weather patterns, a clear increasing trend is evident prior to the establishment of the Edwards Aquifer Authority in

Figure 15. U.S. Drought Conditions for Texas, September 2011

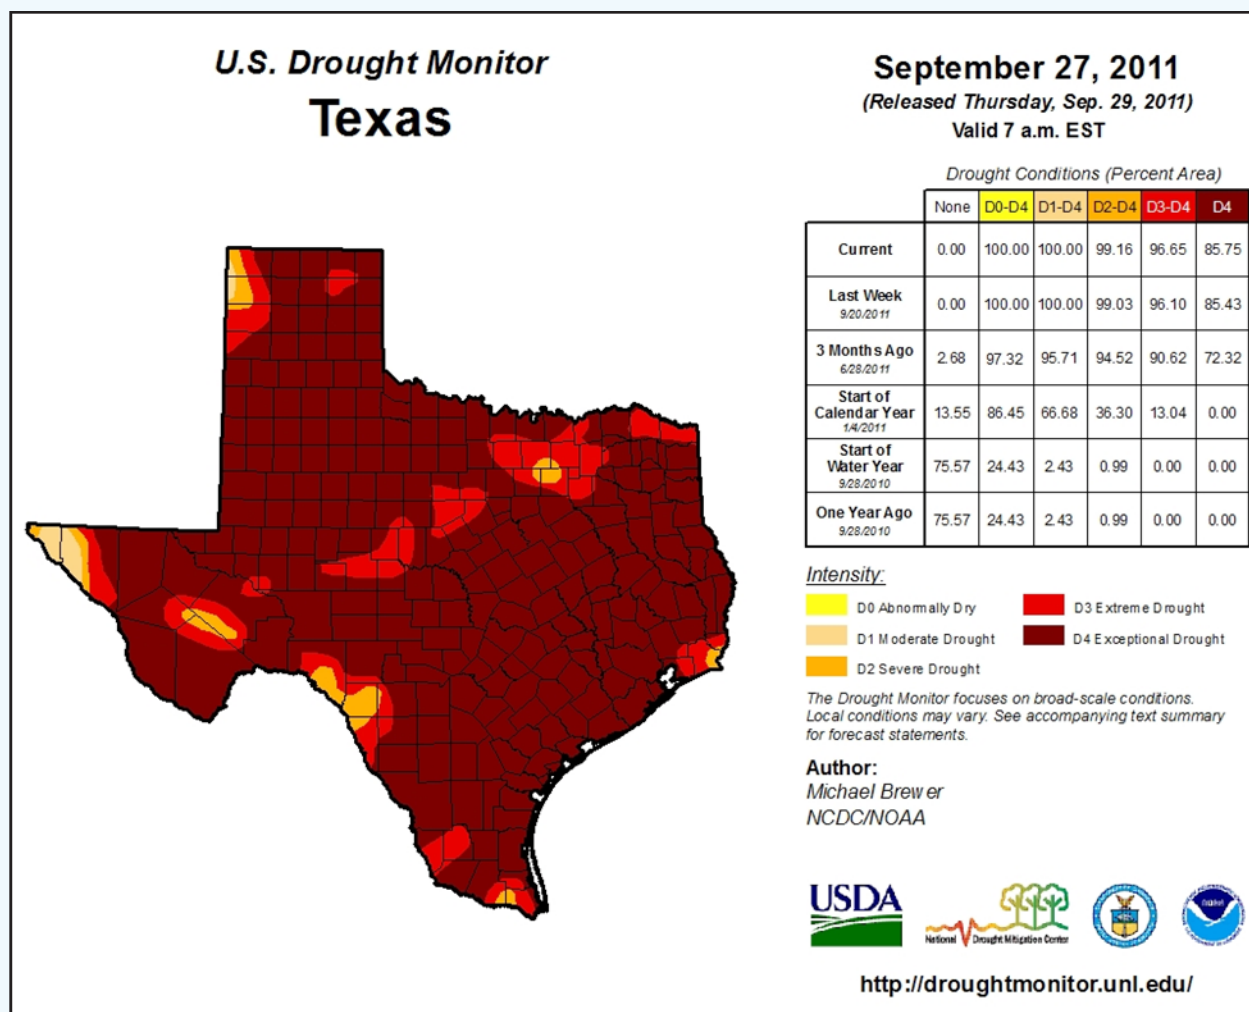

1997. Notable in this trend is the substantial increase in summer peak pumping rates. After 1997, however, pumping withdrawal rates decreased slightly and have remained steady. Note that after establishment of new Critical Period Management rules in 2002, summer peak pumping rates have been greatly reduced.

Analysis of regional demographic and climate data prior to 1997 shows a clear correlation of annual withdrawals to population and climate. That is, increasing population and drier climate conditions result in increased demand for water. On the basis of climate and population growth since 1997, EAA estimates that, had the increased rates of pumping remained unconstrained, a cumulative total of an additional 2.4 million acre-feet of water could have been pumped from the aquifer by the end of 2014. The effect of such unconstrained pumping on water levels

and spring flows during 2014 would likely have resulted in spring flow levels worse than the lows observed at the height of the drought of record in 1956 and a likely cessation of flows at Comal Springs.

Additional conservation measures related to the Edwards Aquifer Habitat Conservation Plan (EAHCP) include the Voluntary Irrigation Suspension Option (VISPO), regional conservation, and Stage V Critical Period Management restrictions. The VISPO program provides financial incentive for irrigators to commit to reducing water use in the following year if the daily-high water level in San Antonio index well J-17 is below 635 feet msl on October 1. Because on October 1, 2014, the J-17 daily high was 630.6 feet msl, the VISPO program will be in effect through 2015, thus affecting an additional 40,000 acre-feet of pumping reductions.

Figure 16. U.S. Drought Conditions for Texas, December 2014

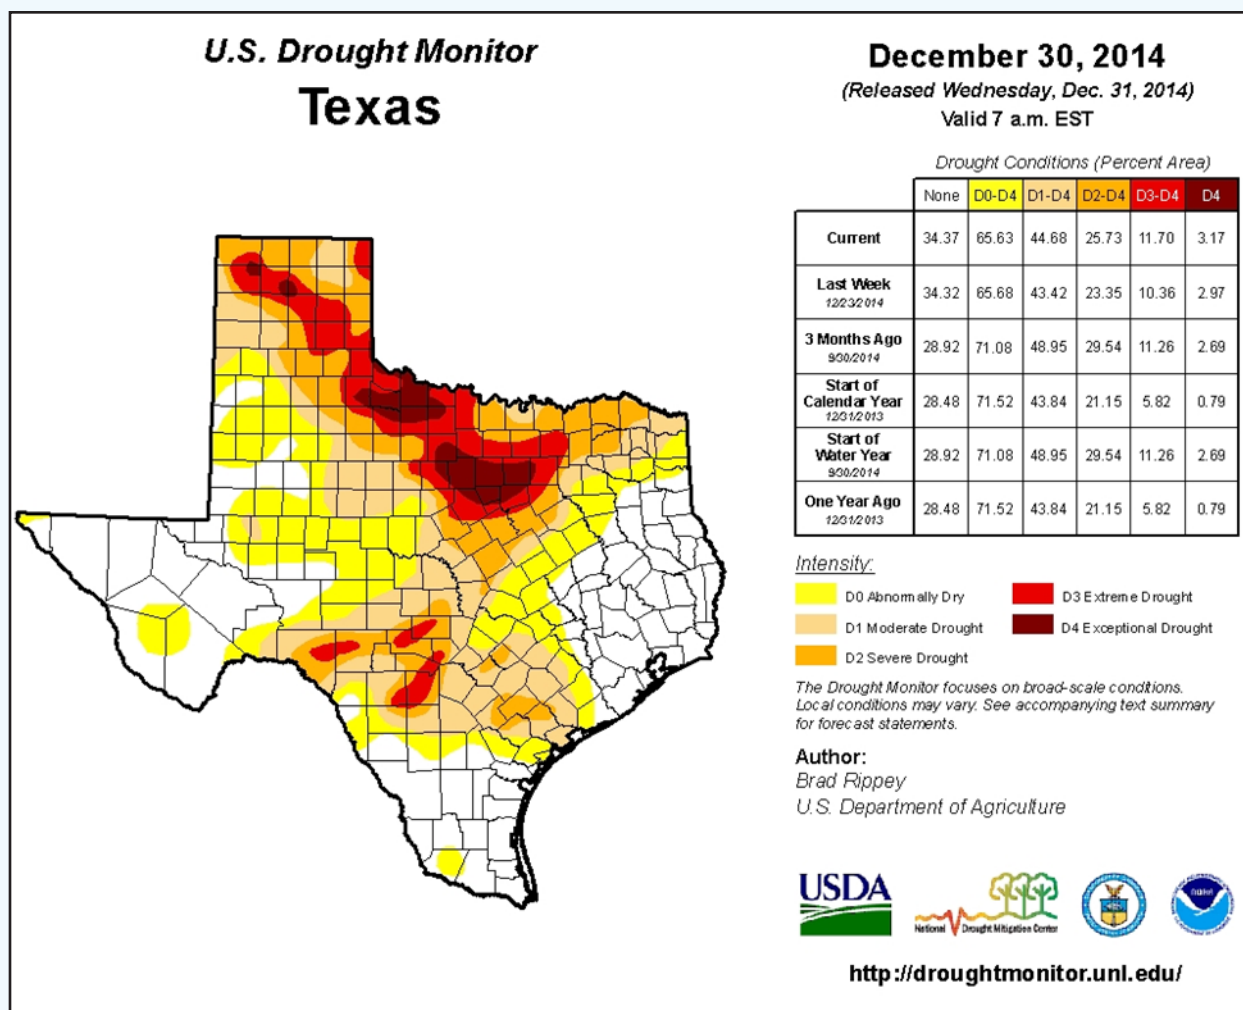


Figure 17. Annual Recharge in Acre-Feet, 2003–2014

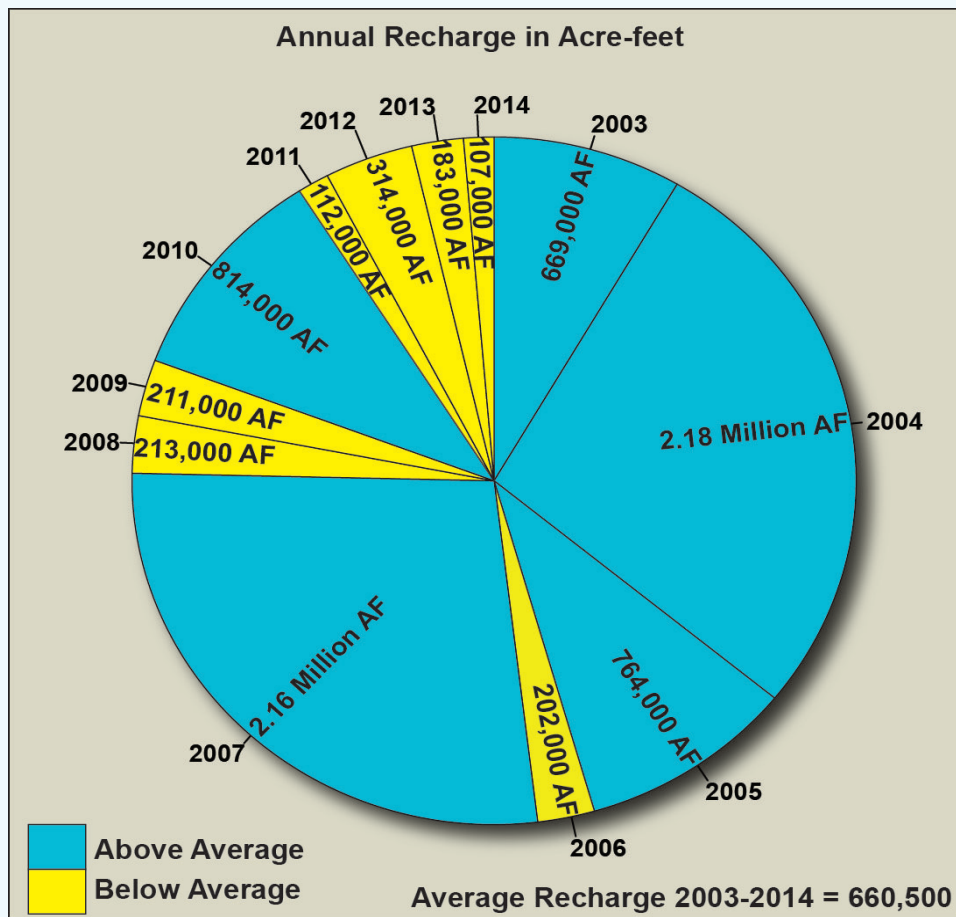


Figure 18. Daily Highs for J-17 and J-27, Annual Recharge and Mean Rainfall Deficits

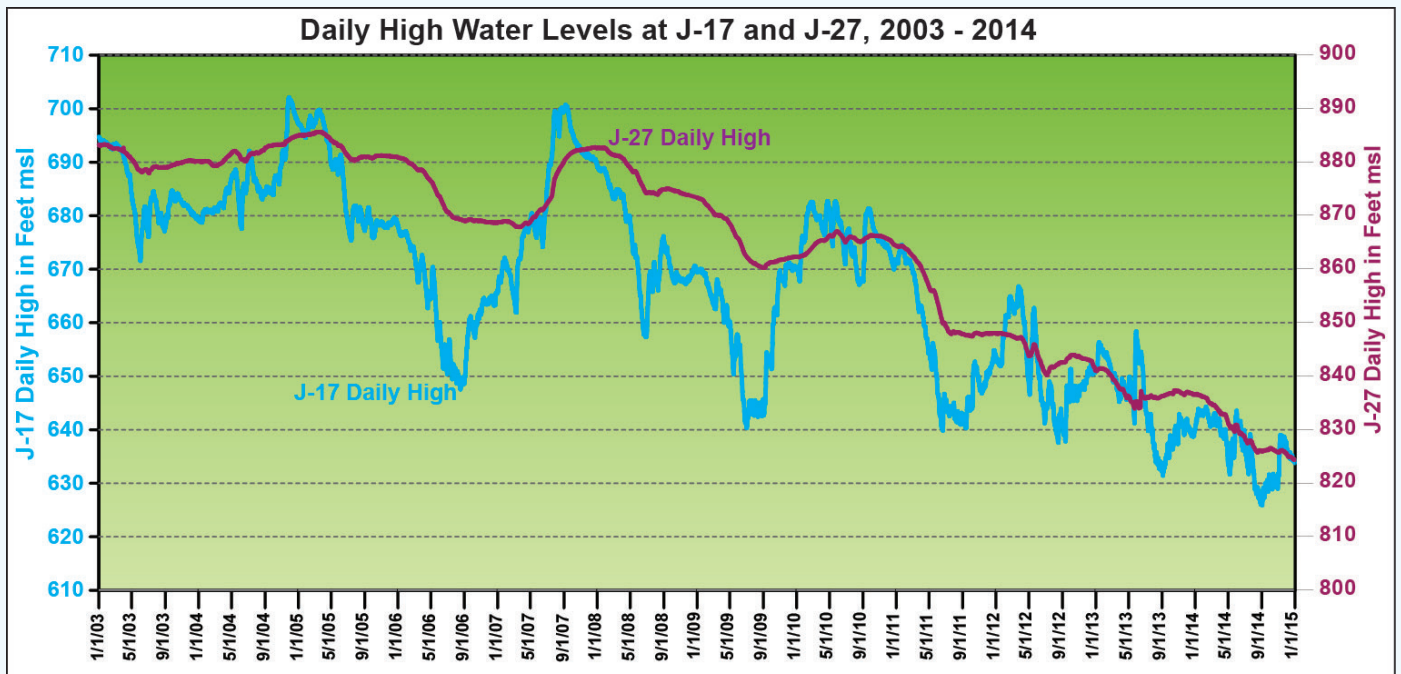


Figure 19. Comparison of Water Levels at Index Well J-17 for the Periods 1945–1957 and 2003–2014


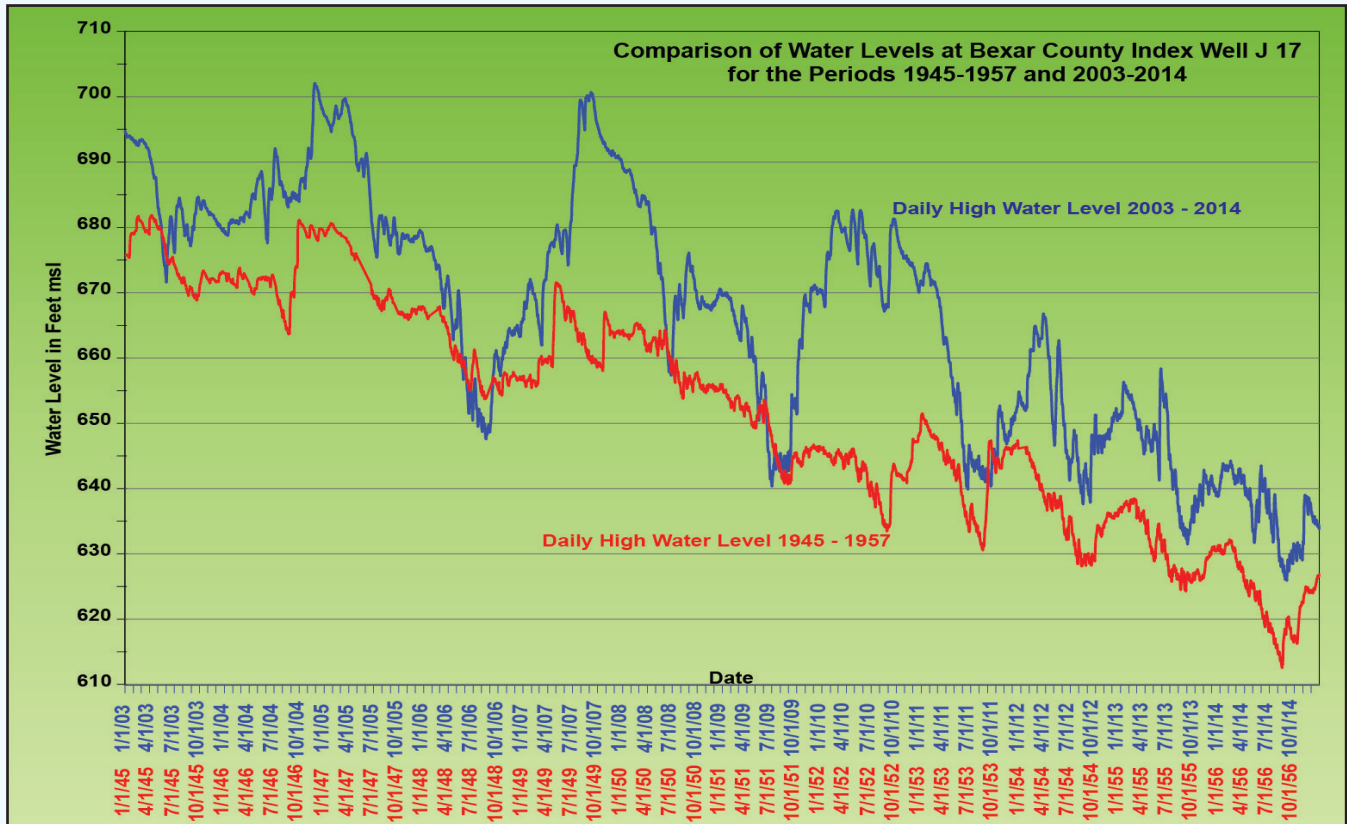


Figure 20. Trend in Monthly Pumping for years 1947 through 2011

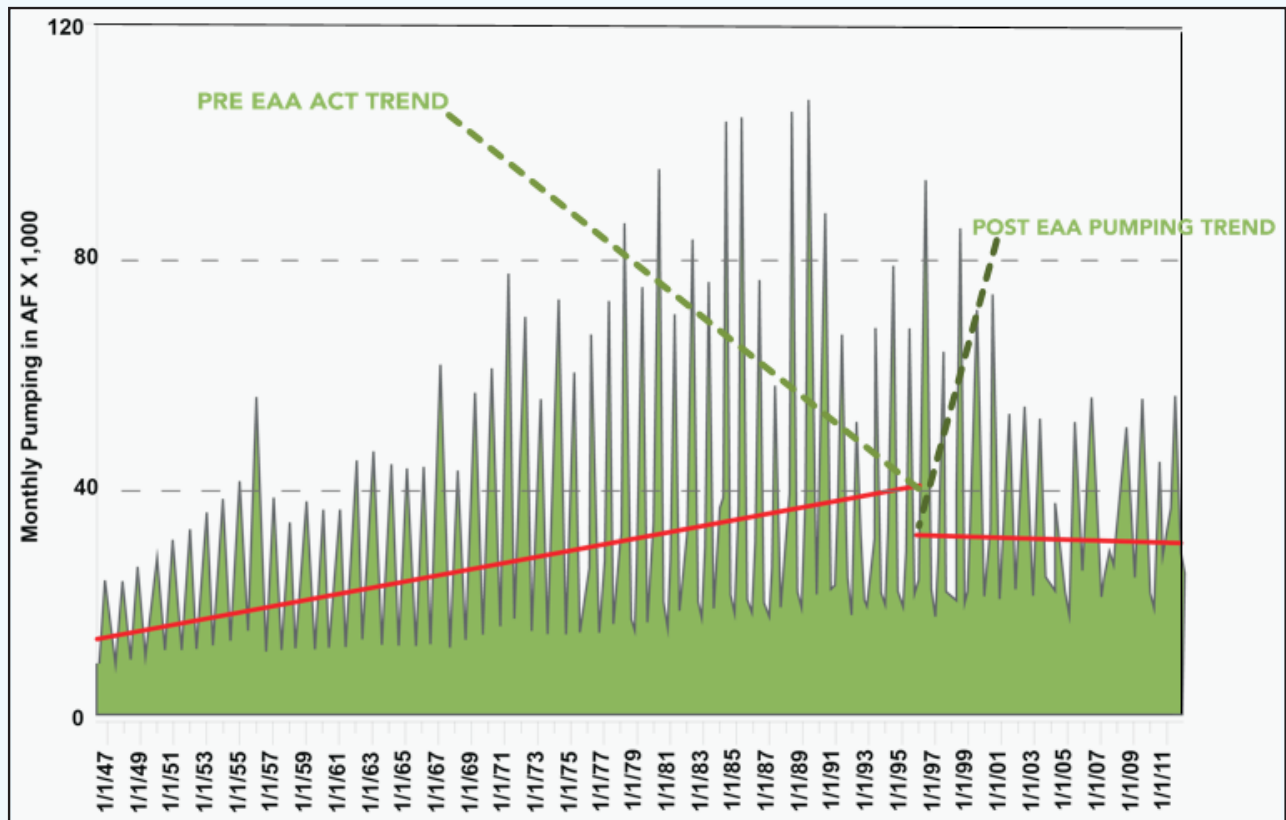

DEFINITIONS

Technical terms and abbreviations used in this report are defined below.

acre-foot	Quantity of water required to cover one acre to a depth of one foot, equivalent to 43,560 ft ³ (cubic feet), about 325,851 gal (gallons), or 1,233 m ³ (cubic meters).
aquifer	A body of rock that contains sufficient saturated permeable material to conduct groundwater and to yield economically significant quantities of groundwater to wells and springs.
artesian well	A well tapping confined groundwater. Water in the well rises above the level of the confined water-bearing strata under artesian pressure but does not necessarily reach the land surface.
artesian zone	An area where the water level from a confined aquifer stands above the top of the strata in which the aquifer is located.
average	A number representing the sum of a group of added figures divided by the number of figures.
bacteria	Microscopic unicellular organisms, typically spherical, rodlike, or spiral and threadlike in shape, often clumped in colonies. Some bacteria are pathogenic (causing disease), whereas others perform an essential role in nature in the recycling of materials (measured in colonies/100 mL).
conductivity	A measure of the ease with which an electrical current can be caused to flow through an aqueous solution under the influence of an applied electric field. Expressed as the algebraic reciprocal of electrical resistance (measured in microsiemens per centimeter (μS/cm) at ambient temperature). Generally, in water, the greater the TDS content, the greater the value of conductivity. See also <i>specific conductance</i> .
confined aquifer	An artesian aquifer or an aquifer bound above and below by impermeable strata or by strata with lower permeability than the aquifer itself.
domestic or livestock use	Use of water for drinking, washing, or culinary purposes; or irrigation of a family garden or orchard, the produce of which is for household consumption only or watering animals.
discharge	Volume of water that passes a given point within a given period of time.
drainage area	Area or watershed where runoff from precipitation flows downgradient to the recharge zone of the Edwards Aquifer. Also known as the <i>Texas Hill Country</i> .

drainage basin	An area bounded by a divide and occupied by a drainage system. It consists of a surface stream or a body of impounded surface water together with all tributary surface streams and bodies of impounded surface water.
drinking water	All water distributed by any agency or individual, public or private, for the purpose of human consumption or that may be used in the preparation of foods or beverages or for the cleaning of any utensil or article used in the course of preparation or consumption of food or beverages for human beings. The term <i>drinking water</i> shall also include all water supplied for human consumption or used by any institution catering to the public.
Edwards Aquifer Authority (EAA)	Regional governmental entity established by the Texas Legislature in 1993 to “manage, enhance, and protect the Edwards Aquifer system.”
Edwards Underground Water District (EUWD)	Regional governmental entity that preceded the Edwards Aquifer Authority.
freshwater/saline-water interface	Interface or boundary that separates TDS values less than 1,000 mg/L (freshwater) from TDS values greater than 1,000 mg/L (saline water). Commonly referred to as the <i>bad water line</i> .
gauging station	A particular site that systematically collects hydrologic data such as streamflow, springflow, or precipitation.
groundwater divide	A ridge or mound in the water table or potentiometric surface from which the groundwater moves in opposite directions.
mean	Arithmetic average of a population of numbers. Described mathematically as $\text{mean} = (X_1 + X_2 + X_3 + \dots + X_n) / n$.
median	Numerical value at the “center” or “middle” of a data set, where one-half of the sample population is less than, and one-half is greater than, the median value.
method blank	Laboratory-grade water taken through the entire sample preparation and analytical procedure as part of a batch of samples to determine the presence or absence of target constituents or interferents. The blank is used to assess possible background contamination from the analytical process. This blank is also referred to as a <i>laboratory blank</i> .
method detection limit	The minimum concentration of a substance that can be measured and reported with 99-percent confidence that the analyte concentration is greater than zero and is determined from analysis of a sample in a given matrix containing the analyte. The method detection limit (MDL) is estimated in accordance with 40 CFR 136, Appendix B.

micrograms per liter (µg/L)	A unit for expressing the concentration of chemical constituents in solution as mass (micrograms) of solute per unit volume (liter) of water; 1,000 micrograms per liter is equal to 1 milligram per liter.
milligrams per liter (mg/L)	A unit for expressing the concentration of chemical constituents in solution as mass (milligrams) of solute per unit volume (liter) of water; 1,000 milligrams per liter is equal to 1 gram per liter.
potentiometric surface	An imaginary surface representing the total head of groundwater and defined by the level to which water will rise in a well. Under confined conditions, the water level will rise above the producing aquifer.
public water system	A system for the provision to the public of water for human consumption through pipes or other constructed conveyances, which includes all uses described under the definition for <i>drinking water</i> .
real-time data	Instantaneous or near-instantaneous information used to monitor a current condition such as precipitation, streamflow, spring discharge, etc.
recharge	Process involved in absorption and addition of water to the zone of saturation.
recharge zone	Area in which water infiltrates into the ground and eventually reaches the zone of saturation in one or more aquifers.
semivolatile organic compounds (SVOCs)	Class of naturally occurring and synthetic organic compounds such as polynuclear aromatic hydrocarbons and chlorinated hydrocarbons and pesticides; typically analyzed using gas chromatograph/mass spectrometers.
specific conductance	A measure of the ability of an aqueous solution to conduct an electrical current. Specific conductance is the given value of conductivity adjusted to a standard temperature of 25°C. Expressed in microsiemens per centimeter (µS/cm). See also <i>conductivity</i> .
ten-year floating average	Calculated mean of the current year plus the previous nine years in a graph.
total dissolved solids (TDS)	Concentration of dissolved minerals in water, usually expressed in units of milligrams per liter (mg/L).
transect wells	A group of Edwards Aquifer monitoring wells positioned in a linear transect to monitor for changes in water quality along the freshwater/saline-water interface.

trip blank	Laboratory-grade water taken from the laboratory to the sampling site and returned to the laboratory unopened whenever samples are collected for analyses of volatile organic compounds. This blank is used to measure cross-contamination from the container and preservative during transport, field handling, and storage. It is analyzed for volatile organic compounds.
unconfined aquifer	An aquifer, or part of an aquifer, with a water table and containing groundwater that is not under pressure beneath relatively impermeable rocks.
underflow	Movement of water flowing beneath the land surface within the bed or alluvial plain of a surface stream.
volatile organic compounds (VOCs)	Class of naturally occurring and synthetic organic compounds with boiling points below 200°C, typically analyzed using gas chromatograph/mass spectrometers; includes solvents such as trichloroethene or benzene.
water level observation well	A water well used to measure the water level or potentiometric surface of water-bearing strata such as the Edwards Aquifer, Leona Gravel Aquifer, and Lower Glen Rose (Trinity) Aquifer.
water table	Interface between the zone of saturation and the zone of aeration, where the surface pressure of unconfined groundwater is equal to the atmospheric pressure. Also known as the <i>piezometric surface</i> .
zone of aeration	Subsurface zone where the voids and pore spaces may contain water under less pressure than that of the atmosphere. Also known as the <i>vadose zone</i> .
zone of saturation	Subsurface zone in which all voids and pore spaces are filled with water under pressure greater than that of the atmosphere. Also known as the <i>phreatic zone</i> .

ACKNOWLEDGMENTS

The EAA extends its appreciation to municipalities, agencies (Federal, State, and local), and other well owners who participated in this data compilation by granting access to their wells, land, and records. The EAA also extends its gratitude to the United States

Geological Survey, Water Resources Division, San Antonio Subdistrict, for its work in compiling and calculating recharge and springflow discharge from the Edwards Aquifer.

REFERENCES

- Green, R.T., Bertetti, F.P., Franklin, N.M., Morris, A.P., Ferrill, D.A., and Klar, R., 2006, Evaluation of the Edwards Aquifer in Kinney and Uvalde Counties, Texas: Report Prepared for the Edwards Aquifer Authority, June 19, 2006: Geosciences and Engineering Division, Southwest Research Institute, San Antonio, Texas, 53 p.
- Groschen, G.E., 1993, Estimation of recharge by the U.S. Geological Survey, from Texas sections joint spring meeting and Texas hydrology roundup, Austin, Texas, (USA), April 16, 1993, in Jennings, M.E., ed., Proceedings: Texas Sections Joint Spring Meeting and Texas Hydrology Roundup: American Institute of Hydrology, 4 p.
- Ivahnenco, T., and Zogorski, J.S., 2006, Sources and Occurrence of Chloroform and Other Trihalomethanes in Drinking-Water Supply Wells in the United States, 1986–2001: U.S. Geological Survey Scientific Investigations Report 2006-5015, 11 p.
- Nielsen-Gammon, J.W., 2011, The 2011 Texas Drought: A Briefing Packet for the Texas Legislature: The Office of the State Climatologist, A&M University, College Station, Texas, 43 p.
- Pavilicek, D.J., Small, T.A., and Rettmann, P.L., 1987, Hydrogeologic Data from a Study of the Freshwater Zone/Saline-Water Zone Interface in the Edwards Aquifer, San Antonio Region, Texas: U.S. Geological Survey Open-File Report 87-389, 108 p.
- Reeves, R.D., 1971, Results of Test Drilling at the San Marcos Fish Hatchery, Texas: U.S. Geological Survey Open-File Report, 11 p.
- Texas A&M AgriLIFE, 2014, Texas ET Network (<http://texaset.tamu.edu/etinfo.php>).
- U.S. Department of Commerce, 2014, Climatological Data Monthly Summaries: National Oceanic and Atmospheric Administration (NOAA), <http://w2.weather.gov/climate/xmacis.php?wfo=ewx>.
- William F. Guyton Associates, Inc., 1992, Memorandum Report on Compilation and Analysis of Well and Census Data for the Edwards Aquifer, San Antonio Area, Texas, 9 p.
- Winslow, A.G., and Kister, L.R., 1956, Saline-Water Resources of Texas: U.S. Geological Survey Water-Supply Paper 1365, 105 p.
- ### Internet Resources:
- MCL Information and Tables:
[http://info.sos.state.tx.us/pls/pub/readtac\\$ext.ViewTAC?tac_view=5&ti=30&pt=1&ch=290&sch=F&rl=Y](http://info.sos.state.tx.us/pls/pub/readtac$ext.ViewTAC?tac_view=5&ti=30&pt=1&ch=290&sch=F&rl=Y)
- TRRP Rules and PCL Tables:
http://www.tceq.state.tx.us/assets/public/remediation/trrp/trrptb1_5_042308.xls
- Population and Census Data:
<http://quickfacts.census.gov/qfd/>

APPENDIX A

Year 2014 Water Level Data for Selected Wells

Table A-1. City of Uvalde Index Well J-27 (YP-69-50-302) Daily High Water Levels, imputed (in feet above msl), 2014.

Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	836.46	836.13	834.81	833.32	831.26	830.84	828.58	826.83	825.94	826.49	825.72	825.49
2	836.49	836.08	834.83	833.11	831.13	830.83	828.43	826.75	825.90	826.51	825.74	825.42
3	836.54	836.06	834.78	833.01	830.96	830.78	828.21	826.71	825.87	826.50	825.71	825.33
4	836.58	836.03	834.66	832.85	830.88	830.58	828.05	826.66	825.90	826.50	825.75	825.19
5	836.58	835.96	834.65	832.96	830.79	830.34	827.98	826.60	825.92	826.52	825.72	825.11
6	836.49	835.91	834.55	833.01	830.75	830.17	827.95	826.48	825.97	826.49	825.84	825.02
7	836.63	835.92	834.55	832.99	830.64	829.96	827.86	826.36	826.03	826.44	825.98	824.91
8	836.63	835.90	834.52	832.96	830.50	829.77	827.74	826.24	826.07	826.39	826.04	824.88
9	836.58	835.91	834.51	832.96	830.36	829.69	827.65	826.19	826.10	826.35	826.06	824.86
10	836.49	835.87	834.56	832.94	830.35	829.58	827.51	826.12	826.10	826.32	826.11	824.85
11	836.45	835.84	834.62	832.83	830.44	829.39	827.41	826.07	826.09	826.28	826.11	824.84
12	836.45	835.86	834.56	832.77	830.48	829.20	827.55	825.98	826.07	826.26	826.05	824.83
13	836.45	835.81	834.46	832.76	830.50	829.16	827.67	825.91	826.07	826.26	826.03	824.86
14	836.45	835.67	834.43	832.73	830.55	829.28	827.73	825.83	826.08	826.18	826.05	824.90
15	836.40	835.37	834.35	832.77	830.56	829.34	827.74	825.76	826.09	826.15	826.09	824.88
16	836.40	835.35	834.27	832.85	830.52	829.35	827.69	825.71	826.09	826.14	826.10	824.83
17	836.35	835.28	834.26	832.85	830.43	829.35	827.59	825.71	826.10	826.10	826.01	824.83
18	836.35	835.27	834.23	832.82	830.28	829.30	827.78	825.70	826.09	826.06	825.96	824.83
19	836.35	835.20	834.09	832.77	830.08	829.17	827.90	825.74	826.09	826.05	825.95	824.80
20	836.39	835.09	833.97	832.78	829.97	829.05	827.90	825.83	826.16	826.04	825.92	824.71
21	836.26	834.99	833.94	832.79	829.90	829.03	827.91	825.91	826.20	826.01	825.88	824.68
22	836.21	834.97	833.91	832.73	829.79	829.05	827.91	825.99	826.22	825.97	825.87	824.66
23	836.21	834.91	833.88	832.61	829.64	829.05	827.89	826.07	826.22	825.93	825.87	824.62
24	836.17	834.85	833.85	832.49	829.58	828.97	827.86	826.11	826.19	825.89	825.80	824.50
25	836.26	834.83	833.76	832.36	829.55	828.90	827.78	826.12	826.17	825.82	825.72	824.45
26	836.21	834.79	833.59	832.09	830.00	828.86	827.70	826.09	826.15	825.80	825.66	824.43
27	836.12	834.81	833.45	831.93	830.65	828.84	827.60	826.04	826.22	825.80	825.58	824.38
28	836.04	834.83	833.35	831.79	830.81	828.75	827.40	826.04	826.32	825.79	825.58	824.38
29	836.08		833.31	831.62	830.84	828.66	827.29	826.02	826.41	825.75	825.57	824.36
30	836.08		833.33	831.43	830.84	828.70	827.15	825.97	826.46	825.71	825.54	824.32
31	836.08		833.46		830.85		826.99	825.95		825.74		824.27

ND = No data available

Table A-2. City of Hondo Well (TD-69-47-306) Daily High Water Levels (in feet above msl), 2014.

Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	664.92	665.70	663.36	659.81	649.94	663.22	652.38	649.18	646.81	651.60	651.52	657.74
2	664.92	665.36	663.36	658.05	649.18	663.30	651.04	648.91	646.59	651.52	652.10	657.28
3	665.17	665.37	663.50	657.21	649.01	662.80	649.94	648.04	646.65	651.37	652.35	657.19
4	665.59	665.54	663.75	656.62	649.10	661.54	649.11	648.09	647.32	650.97	652.49	657.01
5	665.76	665.54	663.75	656.96	649.35	660.03	649.78	647.56	648.05	651.40	653.36	656.81
6	665.59	665.45	663.50	658.05	648.76	658.26	650.36	646.65	648.56	651.38	654.78	656.68
7	665.61	665.87	662.74	658.55	648.09	656.84	650.28	646.42	648.76	651.00	655.92	656.60
8	665.95	666.04	662.57	658.30	648.43	656.84	649.86	646.18	649.02	650.80	656.60	656.58
9	666.12	665.71	663.24	657.88	649.94	657.84	648.85	645.80	648.87	650.50	657.13	656.52
10	666.20	665.45	663.83	657.13	650.69	658.35	648.43	646.07	648.32	650.42	657.44	656.36
11	666.12	665.20	664.25	656.12	650.52	658.43	647.76	645.92	648.24	650.68	657.45	656.14
12	665.86	665.45	664.08	655.62	651.28	657.09	647.74	645.77	648.33	651.60	657.34	655.91
13	666.03	665.20	663.58	655.70	653.46	657.00	647.95	646.28	648.77	651.81	657.28	656.00
14	666.12	664.95	663.41	657.04	655.06	656.00	647.94	646.32	648.96	651.61	657.43	656.14
15	665.86	664.78	663.33	658.22	655.65	656.16	647.32	646.15	648.87	651.15	657.76	656.16
16	665.61	664.70	663.24	658.97	656.15	655.83	647.36	646.15	648.83	651.10	657.96	655.71
17	665.61	664.45	662.99	659.14	656.40	654.65	647.65	646.43	648.79	651.00	657.78	655.39
18	665.61	664.11	662.57	659.14	656.49	653.48	651.24	646.44	649.35	650.94	657.45	655.31
19	665.70	663.61	661.31	658.89	656.49	653.56	653.98	647.23	649.61	651.08	657.45	655.47
20	665.86	663.27	659.89	659.31	655.23	652.22	655.49	647.40	649.80	651.14	657.35	655.15
21	665.70	662.10	659.38	659.56	653.55	652.05	656.16	647.51	650.41	651.00	657.18	655.50
22	665.36	661.59	659.30	659.39	652.12	652.39	656.14	647.13	650.59	650.58	657.41	655.55
23	665.44	661.51	659.72	658.72	652.12	652.89	655.94	646.85	650.52	650.49	657.82	655.31
24	665.44	661.34	660.14	657.63	652.29	651.71	655.28	647.09	650.35	650.35	657.82	654.81
25	665.95	661.34	659.32	655.87	653.04	652.47	654.07	647.05	649.84	650.63	657.78	654.75
26	666.20	661.93	659.90	654.44	656.74	653.65	653.55	646.45	649.91	650.91	657.63	654.95
27	666.12	662.85	660.74	654.78	659.34	653.73	652.70	646.26	650.81	651.12	657.45	654.63
28	665.78	663.27	660.99	654.02	661.02	653.89	651.49	646.31	651.41	651.06	657.72	654.19
29	665.70		660.83	653.10	662.29	653.72	650.36	646.16	651.70	650.75	657.84	654.52
30	665.78		660.57	651.36	662.88	653.64	649.61	645.97	651.87	650.63	657.88	654.47
31	665.78		660.83		663.22		649.30	646.54		650.85		654.14

Appendix A (cont.)

Table A-3. City of Castroville Well (TD-68-41-301) Daily High Water Levels (in feet above msl), 2014.

Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	658.4	660.0	658.0	656.3	649.9	656.7	651.1	647.9	644.3	647.4	647.1	653.2
2	658.3	659.8	658.1	655.7	649.1	656.8	650.3	647.6	644.2	647.4	647.5	653.1
3	658.6	659.8	658.0	655.3	648.7	656.7	649.6	647.1	645.3	647.2	647.7	653.1
4	659.0	659.8	658.2	654.7	648.3	656.4	648.9	646.9	649.9	647.1	652.1	653.0
5	659.1	659.7	658.2	654.3	648.2	655.8	648.7	646.6	644.5	647.4	649.7	652.9
6	658.7	659.6	657.9	654.6	648.0	655.0	648.8	646.2	644.8	647.3	649.6	652.7
7	658.9	659.9	657.8	654.7	647.6	654.2	648.8	645.8	645.1	647.1	650.6	652.6
8	659.3	660.2	657.7	654.6	647.4	653.9	648.6	645.6	645.3	647.0	651.2	652.5
9	659.5	660.2	657.9	654.5	648.0	655.3	648.2	645.2	645.4	646.8	651.9	652.4
10	659.7	660.1	658.7	654.3	647.9	654.4	647.8	645.1	645.3	646.7	652.3	652.3
11	659.7	659.8	658.8	653.9	648.1	654.5	647.5	644.9	645.2	646.7	652.4	652.3
12	659.8	659.4	658.7	653.6	651.7	654.3	647.2	645.5	645.0	647.3	652.3	652.1
13	659.9	659.6	658.4	653.5	649.0	654.0	647.0	644.8	645.2	647.4	652.3	652.2
14	659.8	659.5	658.6	656.7	650.0	653.8	647.0	644.9	645.5	647.3	652.6	652.3
15	659.6	659.4	658.7	653.9	650.8	653.8	646.7	644.8	645.4	647.2	652.9	652.3
16	659.7	659.4	658.7	654.3	651.4	653.6	646.3	644.8	645.4	647.3	653.2	652.0
17	659.6	659.3	658.5	654.4	651.8	653.0	646.3	644.7	646.3	647.3	652.9	651.9
18	659.6	659.1	658.4	654.4	651.9	652.4	651.7	644.8	645.8	647.2	652.7	651.8
19	659.6	659.0	658.0	654.4	652.0	651.8	648.8	644.8	646.5	647.3	652.8	651.7
20	659.8	658.8	657.2	654.7	651.8	651.4	650.0	644.8	646.2	647.3	652.8	651.6
21	659.6	658.3	656.9	654.8	651.2	651.2	650.8	644.9	646.4	647.2	652.7	651.8
22	659.6	658.1	656.8	654.9	650.6	650.8	651.1	644.7	646.4	647.0	653.1	651.9
23	659.6	657.9	656.7	654.8	649.9	650.8	651.3	644.7	646.3	646.9	653.3	651.7
24	659.4	657.7	656.7	654.4	650.1	650.4	651.1	644.7	646.3	646.8	653.2	651.2
25	659.7	657.4	656.6	653.6	655.1	650.7	650.8	644.6	646.1	646.8	653.2	651.2
26	660.0	657.4	656.8	653.0	655.8	650.9	650.5	644.5	646.3	647.1	653.2	651.3
27	660.0	657.8	656.6	652.8	653.9	651.3	650.2	644.3	647.4	647.1	653.0	651.0
28	659.7	658.0	656.8	652.3	654.1	651.5	649.7	644.2	646.9	647.0	653.2	651.0
29	659.7		656.6	651.7	655.1	651.5	649.1	644.2	647.2	646.8	653.4	650.9
30	660.0		656.6	650.7	655.9	651.4	648.7	644.2	647.4	646.7	653.4	650.8
31	660.0		656.7		656.4		648.3	644.2		649.2		650.6

Table A-4. Bexar County Index Well J-17 (AY-68-37-203) Daily High Water Levels (in feet above msl), 2014.

Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	640.68	643.49	641.61	640.60	633.45	643.53	637.63	632.46	627.27	630.63	631.27	636.74
2	640.86	643.29	641.94	639.89	633.38	642.86	636.47	632.10	626.04	630.71	631.93	636.45
3	640.97	643.31	641.71	639.69	633.70	641.77	635.74	632.35	625.90	630.30	631.73	636.49
4	641.71	643.30	640.97	638.95	633.71	641.35	635.35	631.69	626.84	630.87	631.49	636.22
5	642.07	643.35	641.60	639.31	632.98	640.62	636.00	630.30	627.47	631.31	635.34	635.77
6	641.55	643.21	641.43	640.13	632.10	639.90	636.21	629.66	628.58	630.69	637.29	635.75
7	642.04	643.51	640.89	640.07	631.67	639.50	635.71	628.84	629.13	629.92	637.94	635.81
8	642.58	643.83	641.39	639.90	631.84	639.59	634.49	628.90	628.87	629.31	638.81	635.36
9	642.76	644.28	642.00	639.53	632.49	640.34	633.88	629.04	627.97	629.10	639.03	634.94
10	643.01	643.80	642.47	639.09	633.27	641.09	633.38	629.47	627.93	628.89	638.68	634.85
11	643.41	643.71	643.01	638.79	633.81	641.34	633.05	628.91	627.29	630.37	638.30	634.78
12	643.87	643.47	642.59	638.67	633.77	640.75	633.15	628.03	627.62	631.70	637.91	635.29
13	643.59	643.54	642.54	638.85	635.43	640.44	633.41	628.64	628.94	631.76	637.76	635.63
14	643.48	643.64	642.79	638.51	637.04	641.06	632.92	628.92	629.98	630.79	637.80	635.77
15	642.91	643.14	643.09	638.70	637.54	641.61	631.74	628.39	629.24	630.58	638.44	635.21
16	642.96	643.01	643.00	639.27	637.43	640.77	632.24	628.85	628.59	630.47	638.82	634.52
17	643.21	642.89	642.64	638.29	638.08	639.60	632.19	629.22	628.76	630.30	638.15	634.64
18	643.59	642.13	642.14	639.07	638.29	638.72	636.08	628.90	629.02	630.64	637.39	634.54
19	643.52	642.26	641.55	639.47	637.73	637.76	637.71	627.84	629.78	631.38	636.53	634.63
20	643.53	642.06	641.19	639.71	636.74	637.39	638.78	627.40	630.00	630.98	636.08	634.85
21	642.69	641.40	640.72	640.07	636.02	636.93	639.12	627.22	630.55	630.10	635.98	634.94
22	643.17	641.81	641.08	639.36	635.19	637.29	638.87	627.13	630.04	629.89	636.90	635.18
23	643.16	642.15	641.51	638.72	634.82	636.94	637.95	627.74	629.06	629.33	638.62	634.60
24	642.85	641.06	641.40	637.98	635.61	636.18	636.82	628.22	628.86	629.59	638.36	634.28
25	643.21	640.61	641.45	637.21	636.38	638.15	636.49	627.18	628.44	630.16	637.92	634.41
26	643.59	640.80	641.17	637.46	637.95	639.44	635.91	626.55	629.10	630.65	637.68	634.48
27	643.30	641.42	641.80	637.64	640.25	639.62	635.64	626.94	630.53	630.41	637.36	634.18
28	643.02	641.36	642.12	636.51	641.54	639.81	635.14	626.09	631.61	629.47	637.88	634.05
29	642.89		642.07	635.28	642.19	639.91	634.52	626.04	631.34	629.51	637.62	634.41
30	642.63		641.95	634.22	642.65	638.90	634.08	626.74	630.80	629.00	637.63	634.13
31	643.26		641.64		642.91		633.84	627.15		630.05		633.79

Appendix A (cont.)

Table A-5. Landa Park Well (DX-68-23-302) Daily High Water Levels (in feet above msl), 2014.

Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	622.4	622.6	622.5	622.4	621.7	622.5	622.1	621.5	620.4	621.1	620.9	622.1
2	622.4	622.7	622.5	622.4	621.7	622.5	622.0	621.5	620.3	621.1	621.1	622.1
3	622.4	622.7	622.5	622.3	621.7	622.4	621.9	621.5	620.2	621.0	621.1	622.1
4	622.5	622.7	622.5	622.3	621.7	622.4	621.9	621.4	620.3	621.1	621.1	622.0
5	622.5	622.7	622.5	622.3	621.6	622.4	621.9	621.3	620.4	621.1	621.6	622.0
6	622.5	622.7	622.5	622.4	621.5	622.3	621.9	621.2	620.5	621.1	621.7	622.0
7	622.6	622.7	622.4	622.3	621.4	622.3	621.9	621.1	620.6	621.0	621.7	622.0
8	622.6	622.7	622.5	622.3	621.4	622.3	621.8	621.0	620.5	620.8	621.8	622.0
9	622.6	622.7	622.5	622.3	621.4	622.3	621.7	621.0	620.5	620.7	621.9	621.9
10	622.6	622.7	622.5	622.3	621.5	622.4	621.6	621.0	620.4	620.7	621.9	621.9
11	622.6	622.7	622.6	622.3	621.6	622.4	621.6	620.9	620.4	620.9	621.9	621.9
12	622.7	622.7	622.6	622.2	621.6	622.4	621.6	620.8	620.4	621.0	621.9	621.9
13	622.7	622.7	622.6	622.2	622.0	622.4	621.6	620.8	620.6	621.1	621.9	621.9
14	622.7	622.7	622.6	622.2	621.9	622.4	621.5	620.8	620.7	621.0	621.9	621.9
15	622.6	622.7	622.6	622.2	621.9	622.4	621.4	620.7	620.7	621.0	622.0	621.9
16	622.6	622.7	622.6	622.2	621.9	622.4	621.4	620.8	620.6	621.0	622.0	621.8
17	622.6	622.7	622.6	622.2	622.0	622.3	621.4	620.8	620.6	620.9	622.0	621.8
18	622.7	622.6	622.6	622.2	622.0	622.2	621.6	620.8	621.1	621.0	621.9	621.7
19	622.7	622.6	622.5	622.3	622.0	622.2	621.8	620.7	620.8	621.0	621.9	621.7
20	622.7	622.6	622.5	622.3	621.9	622.1	622.0	620.6	620.9	621.0	621.9	621.7
21	622.6	622.5	622.4	622.3	621.9	622.1	622.0	620.6	620.9	621.0	621.8	621.7
22	622.7	622.5	622.5	622.2	621.8	622.1	622.1	620.6	620.8	620.9	622.8	621.7
23	622.6	622.5	622.5	622.2	621.7	622.1	622.0	620.6	620.7	620.8	622.3	621.7
24	622.6	622.5	622.5	622.1	621.8	622.0	622.0	620.6	620.7	620.8	622.2	621.6
25	622.6	622.6	622.5	622.1	621.9	622.0	621.9	620.5	620.7	620.9	622.2	621.7
26	622.7	622.5	622.5	622.1	622.1	622.1	621.8	620.4	620.8	620.9	622.2	621.7
27	622.7	622.5	622.5	622.1	622.4	622.2	621.8	620.3	621.0	620.9	622.2	621.6
28	622.6	622.5	622.5	622.0	622.3	622.3	621.8	620.3	621.1	620.8	622.2	621.6
29	622.6		622.5	621.9	622.4	622.3	621.7	620.2	621.1	620.8	622.2	621.6
30	622.6		622.5	621.8	622.4	622.2	621.6	620.3	621.1	620.7	622.2	621.6
31	622.6		622.5		622.5		621.6	620.4		620.8		621.6

Table A-6. Knispel Well (LR 67-01-809) Daily high water levels (in feet above msl), 2014.


Day	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
8	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
12	ND	ND	ND	ND	ND	ND	ND	574.669	ND	ND	ND	ND
13	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
14	ND	ND	ND	575.009	ND	ND	ND	ND	ND	ND	ND	ND
15	ND	ND	ND	ND	ND	ND	575.199	ND	ND	ND	ND	ND
16	ND	ND	ND	ND	ND	ND	ND	ND	574.319	ND	ND	ND
17	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
18	ND	ND	ND	ND	ND	575.849	ND	ND	ND	ND	ND	ND
19	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
20	ND	ND	ND	ND	575.049	ND	ND	ND	ND	ND	ND	ND
21	576.059	ND	ND	ND	ND	ND	ND	ND	ND	574.159	ND	ND
22	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
23	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
24	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
25	ND	ND	575.129	ND	ND	ND	ND	ND	ND	ND	ND	ND
26	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
27	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
28	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
29	ND		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
30	ND		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
31	ND		ND		ND		ND	ND		ND		ND

ND = No data available

APPENDIX B

Year 2014 Hydrographs for Wells and Springs


Figure B-1. Bexar County Index Well J-17 (AY-68-37-203)
Hydrograph of Groundwater Elevation vs. Precipitation at San Antonio International Airport

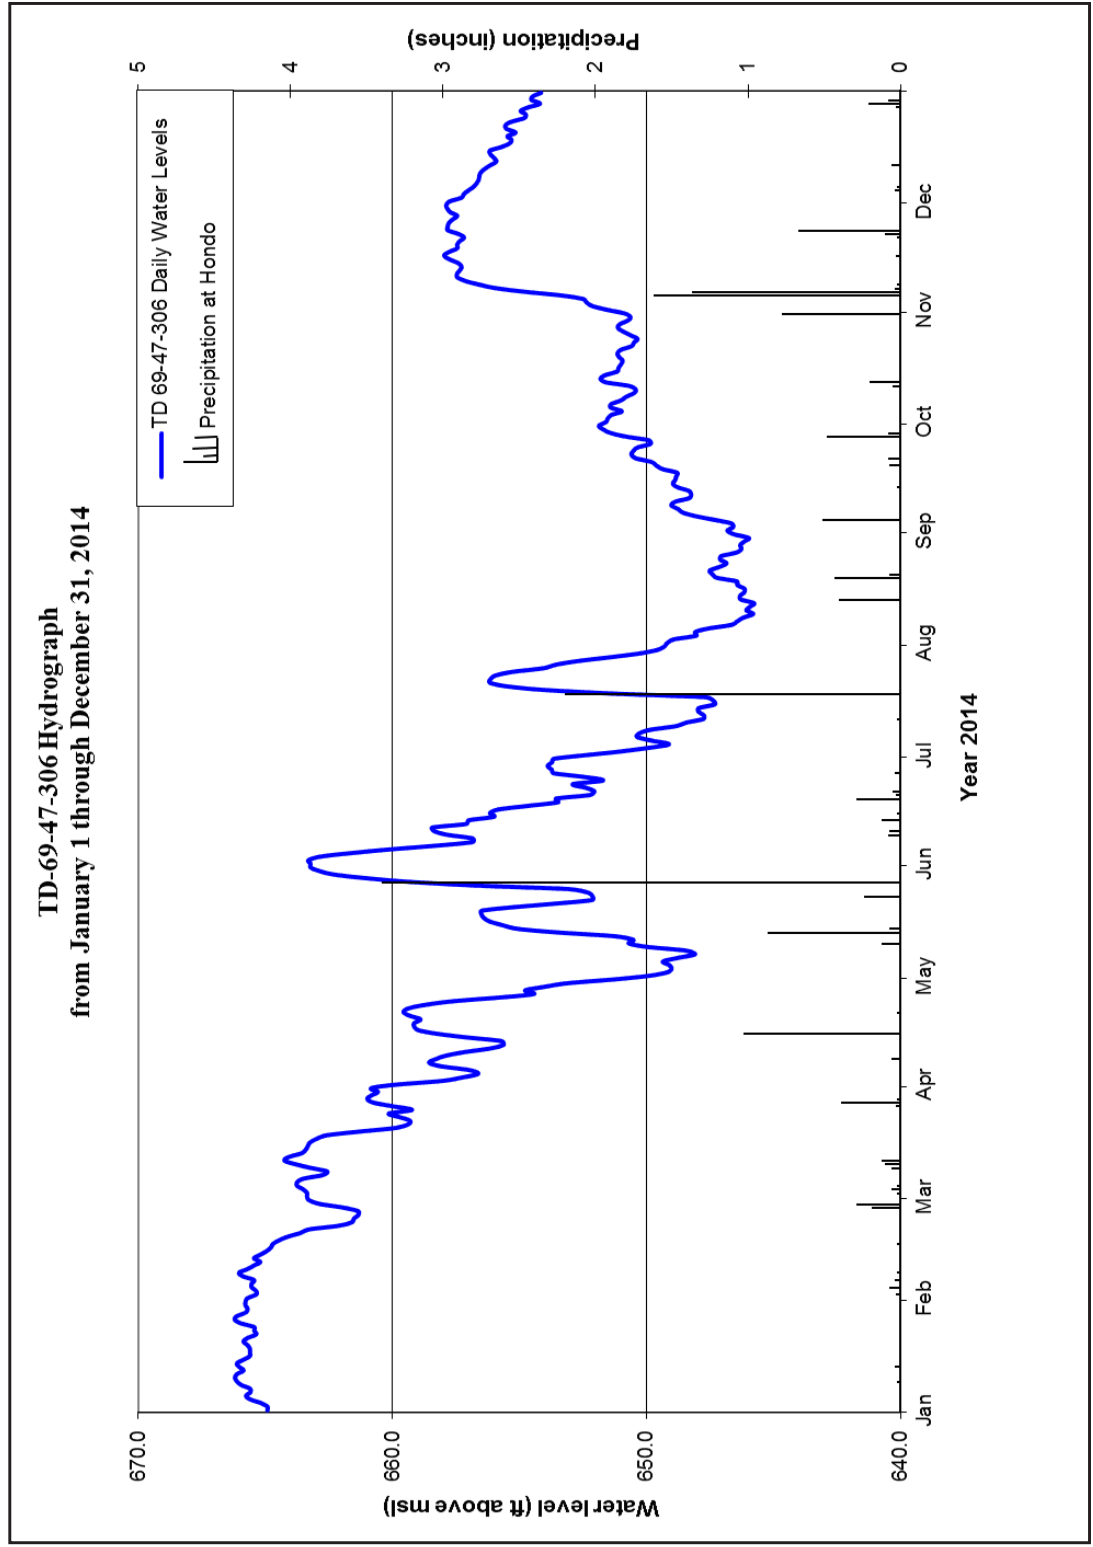

Appendix B (cont.)


Figure B-2. City of Hondo Well (TD-69-47-306)

Hydrograph of Groundwater Elevation vs. Precipitation at Hondo

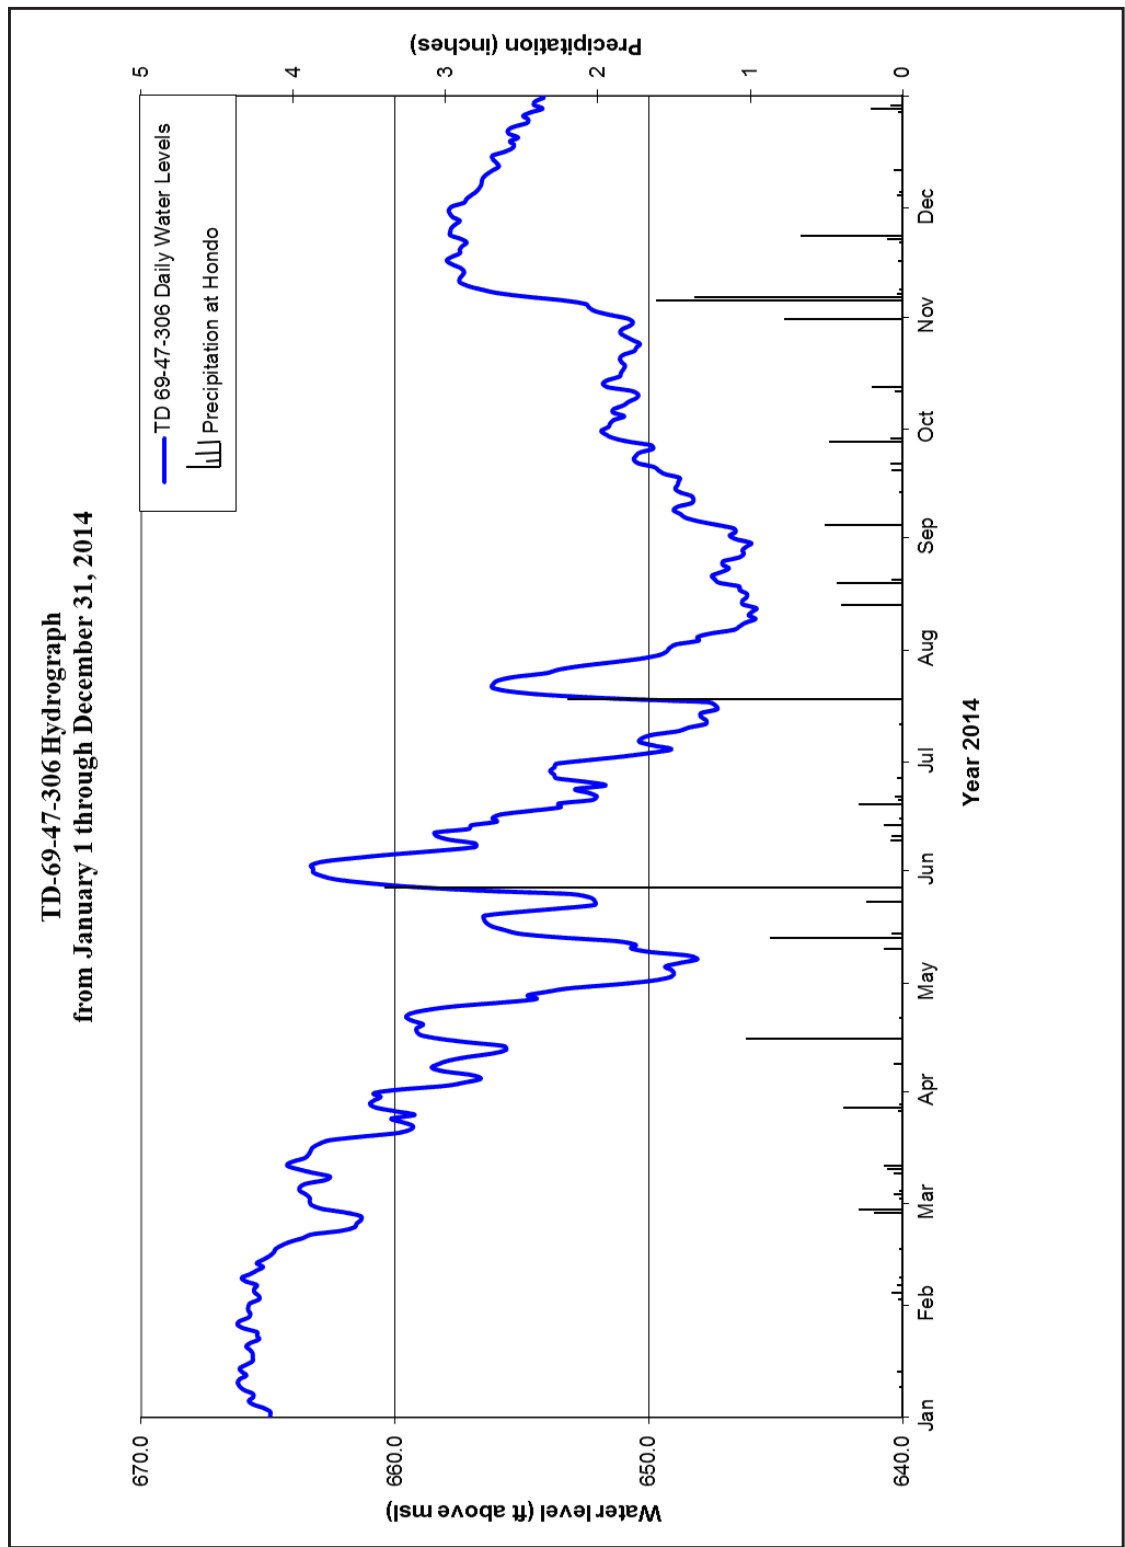


Appendix B (cont.)

Figure B-3. City of Uvalde Index Well J-27 (YP-69-50-302)
Hydrograph of Groundwater Elevation vs. Precipitation at Uvalde

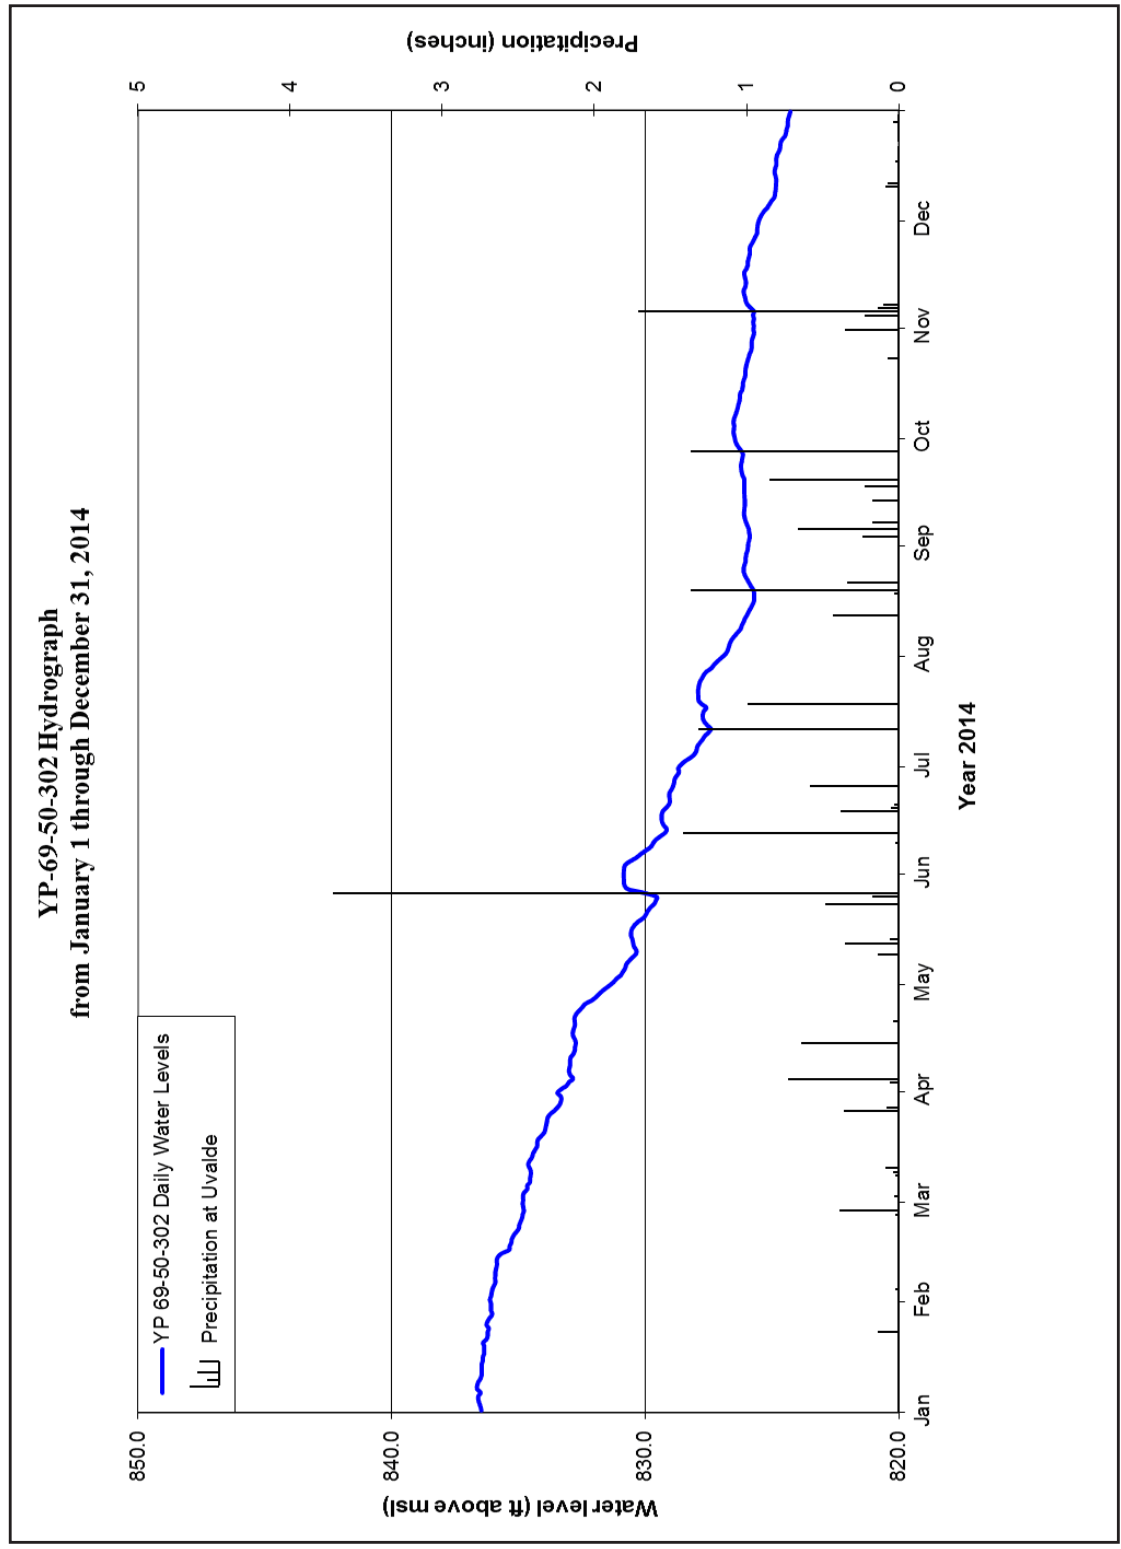


Appendix B (cont.)

Figure B-4. Comal Springflow Hydrograph of Springflow vs. Precipitation at San Antonio International Airport

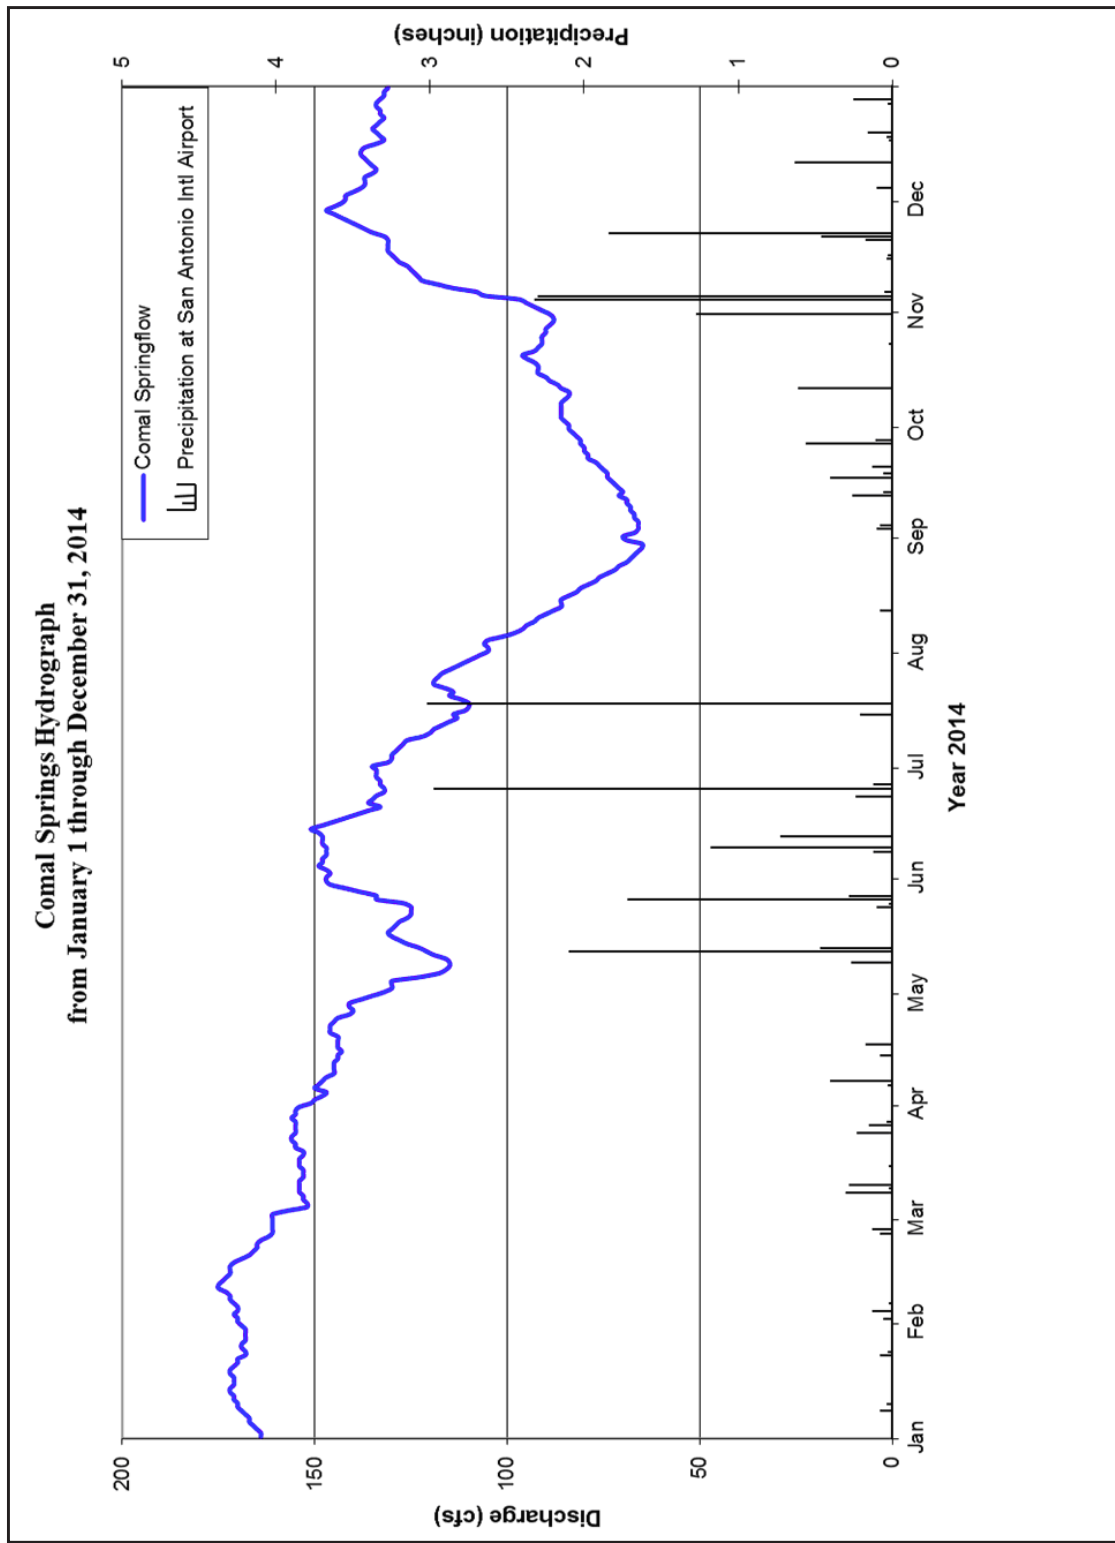

Appendix B (cont.)

Figure B-5. San Marcos Springflow Hydrograph of Springflow vs. Precipitation at San Marcos

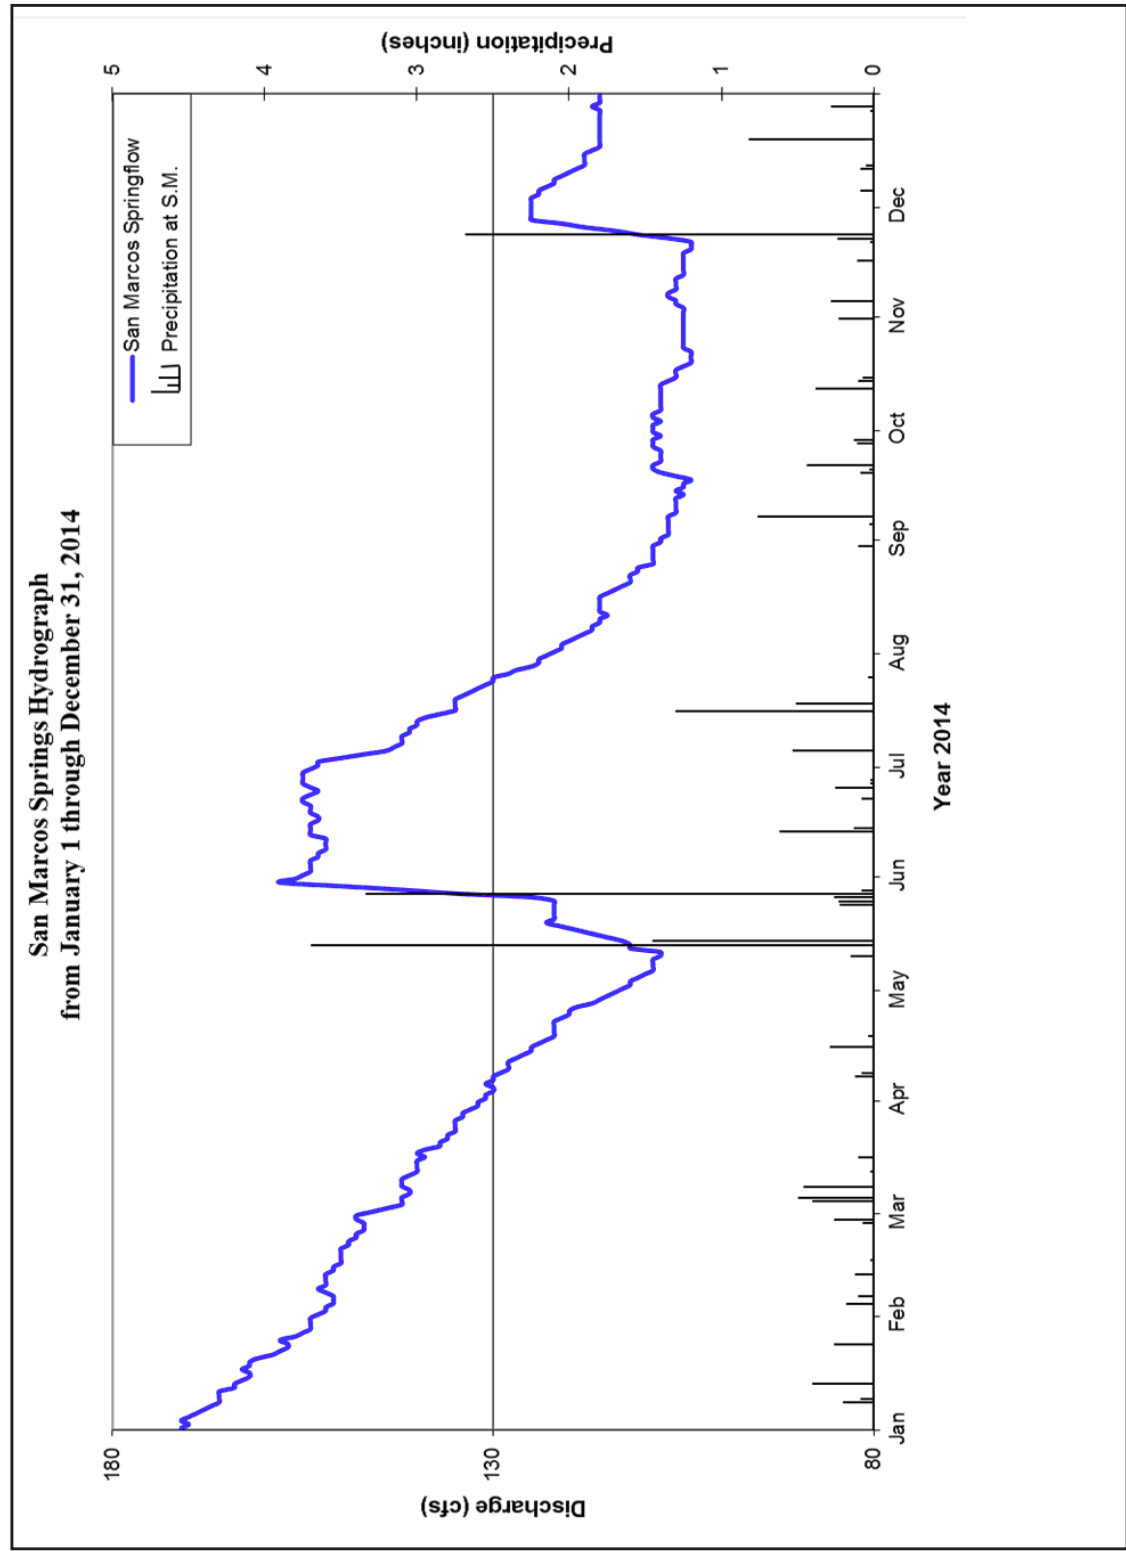

APPENDIX C — Year 2014 Water Quality Data

So that resources might be conserved, the large set of data tables for 2014 Water Quality Data are no longer printed in this report but may be viewed and downloaded on line from EAA's Scientific Reports Document Library at <http://www.edwardsaquifer.org/scientific-research-and-reports/scientific-reports-document-library>. Users may navigate to the documents library website and search for the title "Appendix C of Edwards Aquifer Authority Hydrologic Data Report for 2014." The following tables are included in that document: Table C-1. Field measurements and bacteria counts in water samples from wells completed in the Edwards Aquifer

- Table C-2. Analytical data for major ions from wells completed in the Edwards Aquifer
- Table C-3. Analytical data for metals from wells completed in the Edwards Aquifer
- Table C-4. Analytical data for nutrients from wells completed in the Edwards Aquifer
- Table C-5. Analytical data for pesticides, herbicides, and PCBs from wells completed in the Edwards Aquifer
- Table C-6. Analytical data for volatile organic compounds from wells completed in the Edwards Aquifer
- Table C-7. Analytical data for semivolatile organic compounds from wells completed in the Edwards Aquifer
- Table C-8. Field measurements, bacteria counts, and dissolved oxygen in water samples from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-9. Analytical data for major ions from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-10. Analytical data for metals from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-11. Analytical data for nutrients from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-12. Analytical data for pesticides, herbicides, and PCBs from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-13. Analytical data for volatile organic compounds from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-14. Analytical data for semivolatile organic compounds from streams crossing the Edwards Aquifer recharge zone and springs discharging from the Edwards Aquifer
- Table C-15. Analytical data from pharmaceuticals and personal care products from wells, streams, and springs in the Edwards Aquifer region

APPENDIX D –

Conversion Factors

Volume	Equivalent Units
1 cubic foot	7.48 gallons
	62.41 lbs. of water (1 gal. weighs ~ 8.35 pounds: ~62.45)
1 acre-foot	43,560 cubic feet
	325,851 gallons
	Covers one acre of land (209 feet by 209 feet) one foot deep
1 million gallons	3.07 acre-feet
Flow Rate	
1 cubic foot per second (cfs)	448.80 gallons per minute
	646,272 gallons per day
	1.98 acre-feet per day
	0.65 million gallons per day (0.646272, or approximately 0.65 million gallons per day)
	59.4 acre-feet per month
	236 million gallons per year (0.646272 × 365 = 235.89 million gallons per year)
	724 acre-feet per year (235.89 × 3.07 = 724.18 acre-feet per year)
1 million gallons per day (mgd)	3.07 acre-feet per day
	1,120.55 acre-feet per year
1,000 gallons per minute (gpm)	2.23 cfs
	4.42 acre-feet per day

Cost	
10 cents per 1,000 gallons	\$100.00 per 1 million gallons
	\$32.59 per acre foot (EAA charges \$37.00 for M/I)
0.61 cents per 1,000 gallons	\$2.00 per acre foot
7.7 cents per 1,000 gallons	\$25.00 per acre foot

Metric conversions	
1 acre	0.4 hectares
1 gallon	3.8 liters
1 cubic foot	0.028 cubic meters
1 cubic meter per second	15,850 gallons per minute
	951,019 gallons per hour